

# Platinum Professional Level 16 Channel NVR 1U

## LTN8716K-P16




### Key Features:

- H.265/H.264 Zip+/H.264/MPEG4 video formats
- Support live view, storage, and playback of the connected camera with up to the resolution of 8 Megapixels
- Recording at up to 8MP resolution
- Up to 2 SATA interfaces connectable for recording and backup
- HDMI and VGA output at up to 4K(3840 x 2160) resolution

### Rear Panel:

- |  |  |
|--|--|
| 1. Audio In                            | 7. USB 3.0 Interface                     |
| 2. Audio Out                           | 8. GND                                   |
| 3. VGA Interface                       | 9. 100 to 240 VAC power supply           |
| 4. HDMI Interface                      | 10. Power Switch                         |
| 5. Controller port, Alarm In/Alarm Out | 11. Network Interfaces with PoE Function |
| 6. LAN Network Interface               |  |

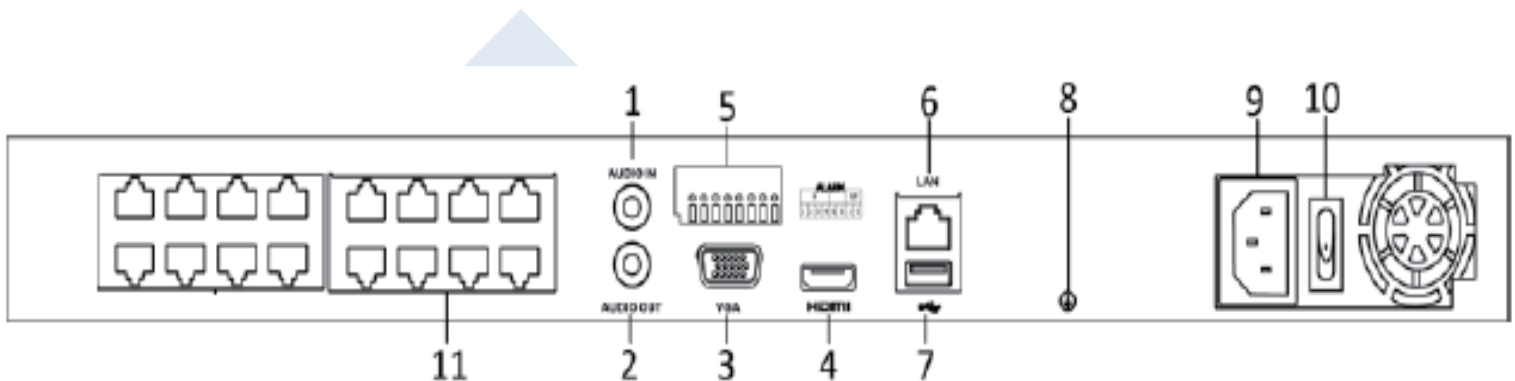

# Platinum Professional Level 16 Channel NVR 1U

## LTN8716K-P16

Video/Audio Input	
IP video Input	16-ch
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)
Network	
Incoming bandwidth	160Mbps
Outgoing bandwidth	160Mbps
Remote connection	128
Video/Audio Output	
Recording resolution	8MP/6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
HDMI output	4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
VGA output	1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
Audio output	1-ch, RCA (Linear, 1kΩ)
Decoding	
Decoding format	H.265/H.264 Zip+/H.264/MPEG4
Recording resolution	8MP/6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous playback	16-ch
Capability	2- ch @ 4K, or 8- ch @ 1080p
Hard Disk	
SATA	2 SATA interfaces for 2 HDDs
Capacity	Up to 6TB for each disk
External Interface	
Network Interface	1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Network protocols	TCP/IP, DHCP, PT CLOUD, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS
USB Interface	1 × USB 2.0 and 1 × USB 3.0
Alarm in/out	4/1
PoE	
Interface	16 RJ-45 10/100 Mbps self-adaptive Ethernet interfaces
Max. Power	≤200W
Supported standard	IEEE 802.3 af/at
GENERAL	
Power Supply	100~240V AC
Consumption	≤15W
Working Temperature	14° F - 131° F(-10° C ~ +55° C)
Working Humidity	10% - 90%
Casing	380mm chassis
Dimensions (WxDxH)	380 × 315 × 52mm (15.0 × 12.4 × 2.0inch)
Weight	≤ 3 kg (6.6 lb)