

# Platinum Professional Level 4 Channel NVR 1U LTN8704Q-P4




## Key Features:

- H.265/H.265+/H.264/H.264 Zip+/MPEG4 video formats
- Support live view, storage, and playback of the connected camera with up to the resolution of 8 Megapixels
- Recording at up to 8MP resolution
- Up to 1 SATA interfaces connectable for recording and backup
- HDMI output at up to 4K(3840 x 2160) and VGA output at up to 1920 × 1080p resolution

## Rear Panel:

1. Network Interfaces with PoE function
2. Audio In
3. Audio Out
4. VGA Interface
5. HDMI Interface
6. LAN Network Interface
7. USB Interface
8. DC 48V power supply
9. Power Switch
10. GND

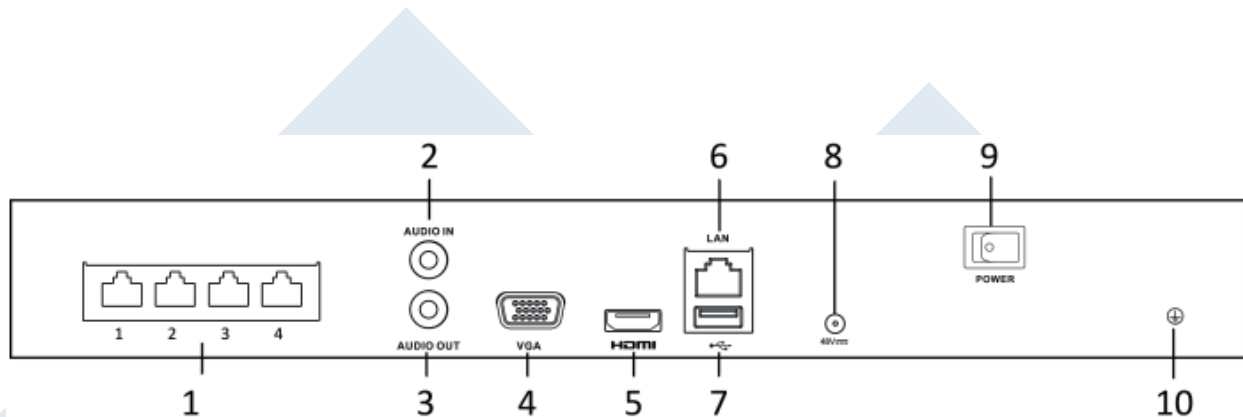

# Platinum Professional Level 4 Channel NVR 1U

## LTN8704Q-P4

| Video/Audio Input    |  |
|----------------------|--|
| IP video Input       | 4-ch   |
| Two-way audio input  | 1-ch, RCA (2.0 Vp-p, 1kΩ)  |
| Network              |  |
| Incoming bandwidth   | 40 Mbps  |
| Outgoing bandwidth   | 80Mbps   |
| Video/Audio Output   |  |
| Recording resolution | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF  |
| HDMI output          | 4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| VGA output           | 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz  |
| Audio output         | 1-ch, RCA (Linear, 1kΩ)  |
| Decoding             |  |
| Decoding format      | H.265/H.265+/H.264/H.264 Zip+/MPEG4  |
| Recording resolution | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF  |
| Synchronous playback | 4-ch   |
| Capability           | 1-ch @ 8 MP / 4-ch @ 1080p   |
| Hard Disk            |  |
| SATA                 | 1 SATA interfaces for 1 HDDs   |
| Capacity             | Up to 6TB for each disk  |
| External Interface   |  |
| Network Interface    | 1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface  |
| Network protocols    | TCP/IP, DHCP, PT CLOUD, DNS, DDNS, NTP, IP Portal, SMTP, NFS, iSCSI, UPnP™, HTTPS                              |
| USB Interface        | 2 × USB 2.0  |
| PoE                  |  |
| Interface            | 4, RJ-45 10/100 Mbps self-adaptive Ethernet interfaces   |
| Max. Power           | ≤ 50W  |
| Supported standard   | IEEE 802.3 af/at   |
| GENERAL              |  |
| Power Supply         | 48V DC   |
| Power                | ≤ 65W  |
| Consumption          | ≤ 10W (without enabling PoE)   |
| Working Temperature  | 14° F - 131° F (-10° C ~ +55° C)   |
| Working Humidity     | 10% - 90%  |
| Casing               | 1U chassis   |
| Dimensions (WxDxH)   | 315 × 240 × 48mm (12.4 × 9.4 × 1.9 inch)   |
| Weight               | ≤ 1 kg (2.2 lb)  |