


EN

USER
MANUAL

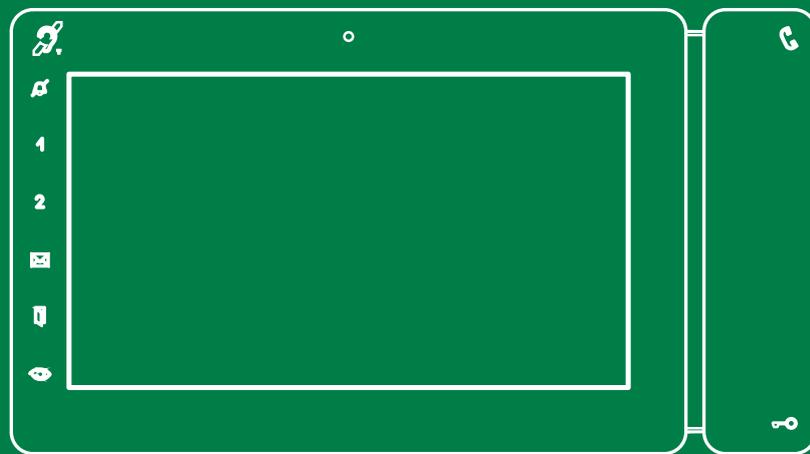

ViP Mini Monitor art. 6802W

 **Comelit**[®]
Passion. Technology. Design.

Warning

Intended use

This Comelit product was designed for use in the creation of audio and video communication systems in residential, commercial or industrial settings and in public buildings or buildings used by the public.

Installation

All activities connected to the installation of Comelit products must be carried out by qualified technical personnel, with careful observation of the indications provided in the Manuals / Instruction sheets supplied with those products.

Wires

Cut off the power supply before carrying out any maintenance procedures.

Use wires with a cross-section suited to the distances involved, observing the instructions provided in the system manual.

We advise against running the system wires through the same duct as the power cables (230V or higher).

Safe usage

To ensure Comelit products are used safely:

- carefully observe the indications provided in the Manuals / Instruction sheets
- make sure the system created using Comelit products has not been tampered with / damaged.

Maintenance

Comelit products do not require maintenance aside from routine cleaning, which should be carried out in accordance with the indications provided in the Manuals / Instruction sheets.

Any repair work must be carried out

- for the products themselves, exclusively by **Comelit Group S.p.A.**,
- for systems, by qualified technical personnel.

Disclaimer

Comelit Group S.p.A. does not assume any responsibility for


- any usage other than the intended use
- non-observance of the indications and warnings contained in this Manual / Instruction sheet.

Comelit Group S.p.A. nonetheless reserves the right to change the information provided in this Manual / Instruction sheet at any time and without prior notice.

Table of contents

Warning	2	User Setup menu	6
Description of the monitor	3	Language	6
Key functions	3	Lock keys and touch screen	7
Key to the indicator LEDs	3	Information	7
ViP Maxi Monitor Menu	4	Volume adjustment	7
Date and time settings	4	Backlight adjustment	7
Functions available	4	Melody settings	7
Intercoms	4	Installer setup menu	8
Cameras	4	NAVIGATION TREE	8
Doors open	4		
Answering service setup	5		
Video memory	5		
Record always	5		
Messages	5		
Video memory	5		
Call divert	5		
Actuators	6		

Description of the monitor

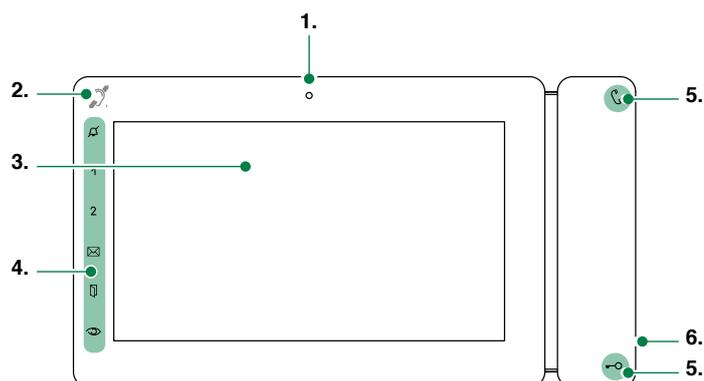

- 1. Microphone
- 2 Built-in magnetic induction loop
- 3. 7" touch screen
- 4. Soft-touch keys / Indicator LEDs
- 5. Keys / Indicator LEDs
- 6. Micro SD card port

Key functions

-  **AUDIO:** allows you to answer incoming calls
 - ✓ Incoming call:
 - ▶ Press to start the conversation
 - ▶ Press again to interrupt the conversation
 - » (*) It is possible to resume the conversation for as long as the LED continues to flash
-  **[programmable]**
LOCK-RELEASE: opens the corresponding door lock
ACTUATOR: allows activation of the associated relay
-  **[programmable]**
PRIVACY: the ringtone will be silenced on receipt of a call from the external unit and from the switchboard
DOCTOR: allows automatic operation of the lock-release on receipt of a call from an external unit
PRIVACY + DOCTOR: activates both functions
- 12 **[programmable [Default: deactivated]**
INTERCOM / SELF-IGNITION / CALL PRIORITY 1-4 / LOCK-RELEASE / ACTUATOR / ACTIVATE OUTPUT / FUNCTION DISABLED
-  **MESSAGE MENU:** allows access to the section Messages
-  **DOORS OPEN:** allows access to the section Doors open
-  **[programmable]**
SELF-IGNITION: allows ignition of the external video unit, and therefore viewing of the external image
INTERCOM / SELF-IGNITION / CALL PRIORITY 1-4 / LOCK-RELEASE / ACTUATOR / ACTIVATE OUTPUT / FUNCTION DISABLED


Key to the indicator LEDs

-  (*) **FLASHING LED:** call in progress
STEADY LED: in communication
-  **1 FLASH:** door opening confirmation
FLASHING LED: call in progress
-  **3 FLASHES EVERY 5 SEC.:** Doctor function activated
STEADY LED: Privacy mode activated
STEADY AND FLASHING LED: Doctor and Privacy activated.
-  **STEADY LED:** video memory / Call divert activated
FLASHING LED: signals presence in directory of a video message that has not been viewed
-  **STEADY LED:** signals the opening of one or more doors


ViP Maxi Monitor Menu

The menu icons vary depending on the type of system installed and the functions available. To navigate the menu, simply use your finger to touch the icon corresponding to the desired function.

- ▶ Touch the display to access the main menu
- ▶ Press the desired menu option to select it

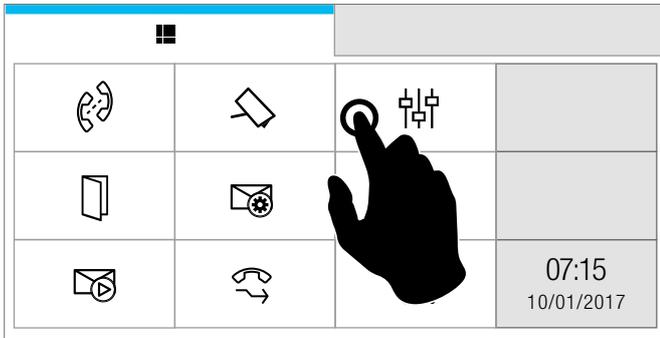


- ▶ Navigate the menus by scrolling up/down through the page

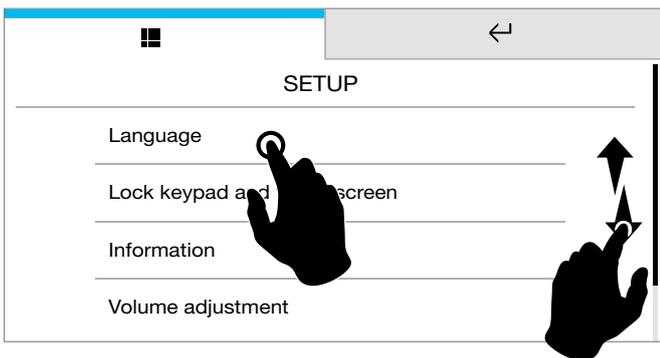

- ▶ Short press the icon  to return to the previous screen

Date and time settings

This function allows you to set the time and date of the device.



- ▶ Press the date and time




Set the desired values for day / month / year / hours / minutes.



Save the settings

Functions available

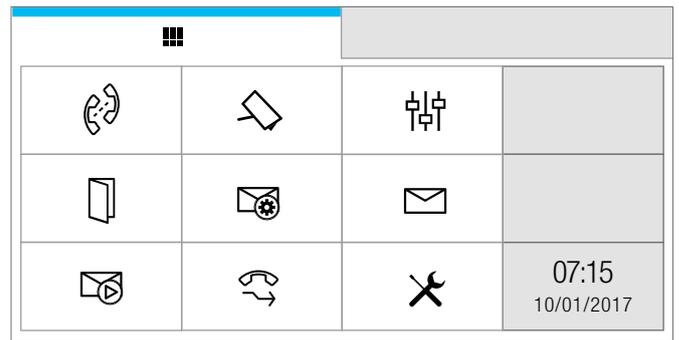

When the ACTUATORS DIRECTORY is enabled, the icon  will be displayed in the main menu.

[Function can be enabled via ViP Manager software].

Intercoms

This function allows you to call addresses saved in the directory.




- ▶ Press the icon to access the function, then select from the directory the device which you wish to call

- ▶ Press the icon **123** to call a specific ViP address. [Function can be disabled via ViP Manager software].

- ▶ Enter the address in the field to start the communication

Cameras


This function allows you to view a directory of cameras and to start live streaming.




- ▶ Press the icon to access the function, then select from the directory the camera to be interrogated

Doors open

This function allows you to view a directory of doors to check their status (open/closed).




- ▶ Press the icon in the main menu to access the directory

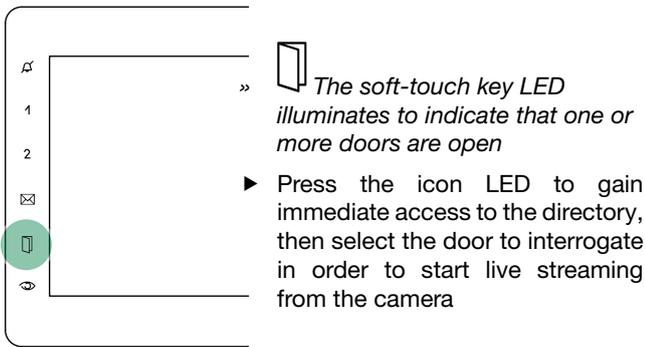

Answering service setup

This function allows you to manage the parameters for the device's video memory function.

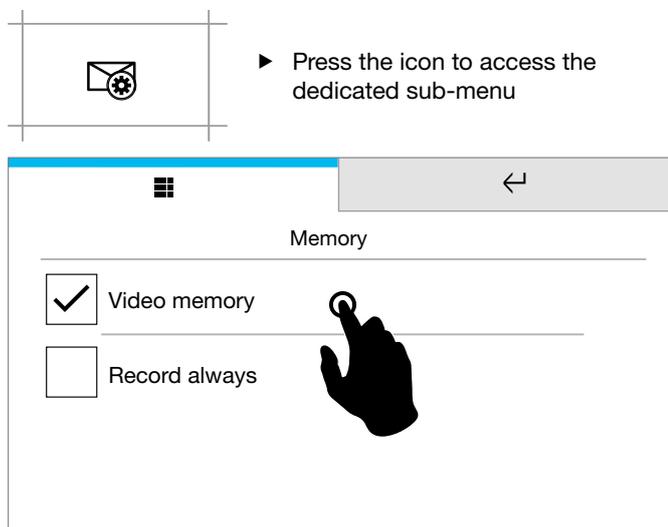

Video memory

This function automatically starts audio/video recording in the event of no reply.

- ▶ Tick the box to enable the function
- » *The icon in the main menu changes colour*
- »  *The soft-touch key LED illuminates (Steady light)*

Record always

This function automatically starts audio/video recording on receipt of a call from an external unit.



- ▶ Tick the box to enable the function.




Both functions must be ticked

Messages

This function allows you to access the ViP messaging system of the device.

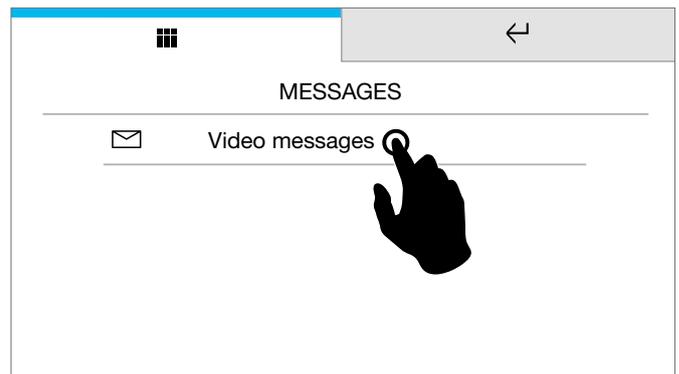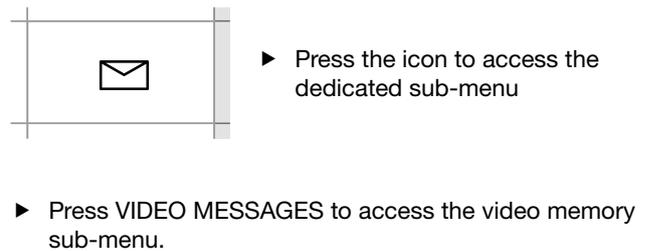

Examples:

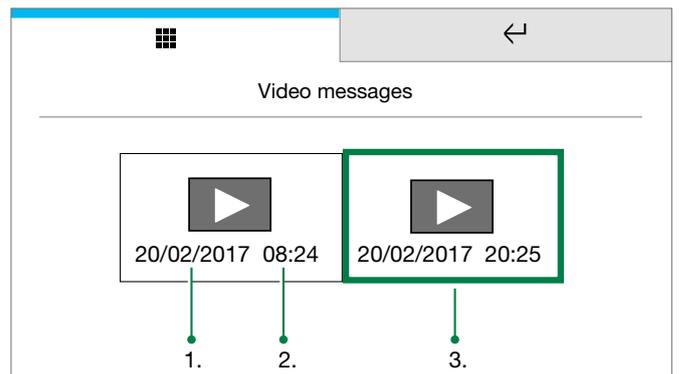


1. Date
2. Time
3. Example of a previously viewed recording

- ▶ *Short press* on the video recording preview to START playback
- ▶ *Short press* on the video recording to STOP playback
- ▶ *Long press* to delete the video recording

Video memory

This function allows you to enable/disable the video memory on the device.

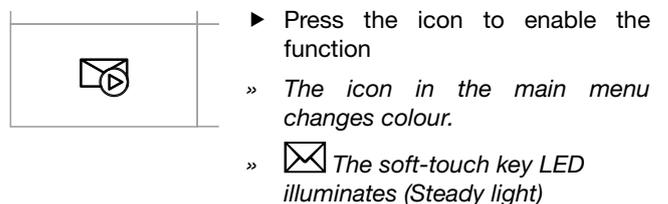

Call divert

This function allows you to quickly enable/disable the call divert function.



- ▶ Press the icon to enable the function
- » *The icon in the main menu changes colour.*

Actuators

This function allows you to activate an actuator by selecting it from the programmed directory.




- ▶ Access the dedicated section, then select the command you wish to activate from the directory

User Setup menu



- ▶ Press the icon
- ▶ Select *User setup menu*

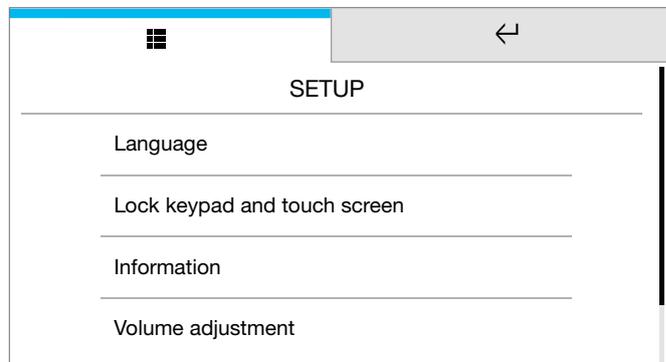


- ▶ Swipe your finger up or down to view all the available menu options
- ▶ To access the desired sub-menu, press the corresponding icon

Language

You can change the interface language.




- ▶ Select the desired language by pressing the relative icon, then confirm the selection

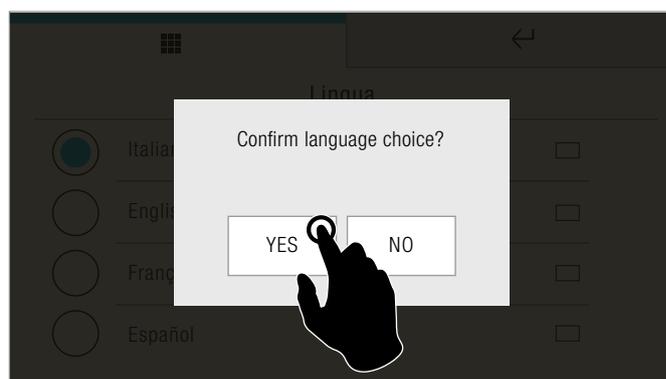

Lock keys and touch screen


The function can be used to lock the device touch screen for 60 seconds, for cleaning purposes.

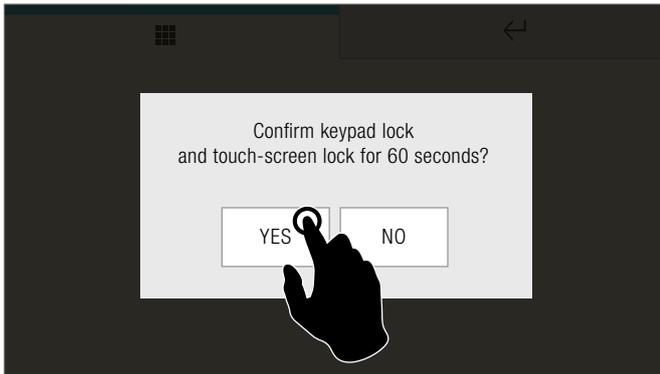

- ▶ Confirm the operation
- » After 60 seconds, the screen is unlocked automatically.

Information

This menu provides technical information about the device (e.g. type of device, versions, addresses, etc.).

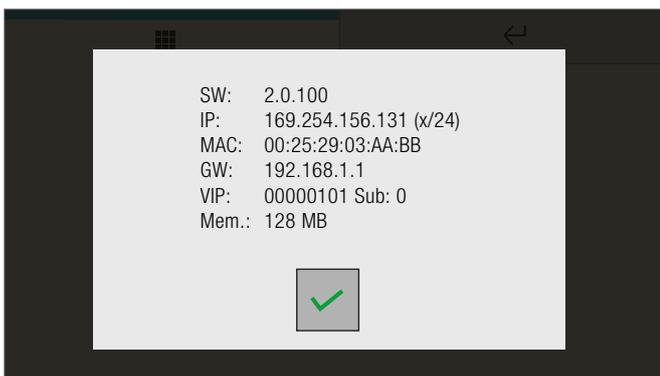


- ▶ Press the icon to exit the screen.


Volume adjustment

The menu allows you to manage and control the audio volumes associated with the various functions of the device.

- ▶ Select the desired option

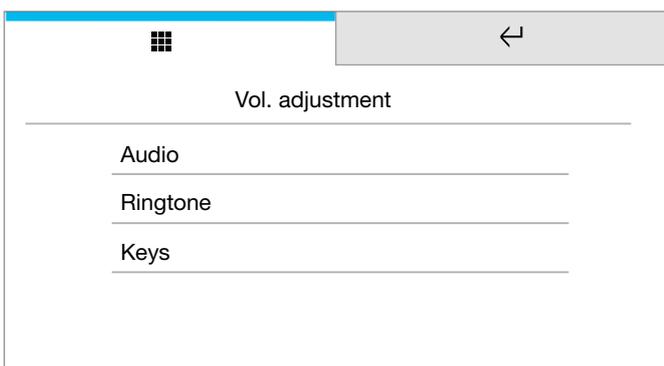

- ▶ Press and drag the cursor to adjust the volume.

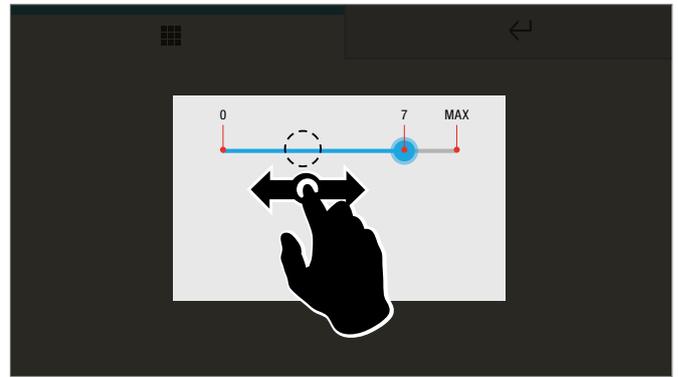


- ▶ Save the setting

Backlight adjustment

It is possible to increase and reduce the monitor backlighting level.

- ▶ Move the cursor to select the desired brightness

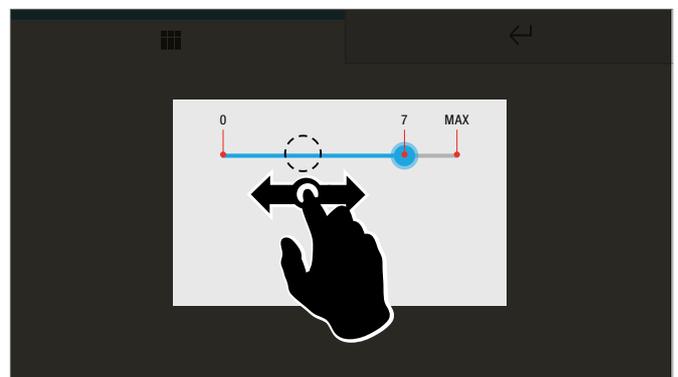



- ▶ Save the setting

Melody settings

From the menu you can choose a melody for each of the device's call functions.


- ▶ Select the desired option

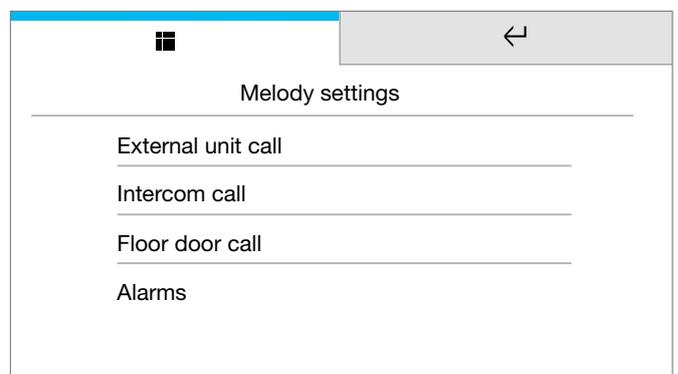

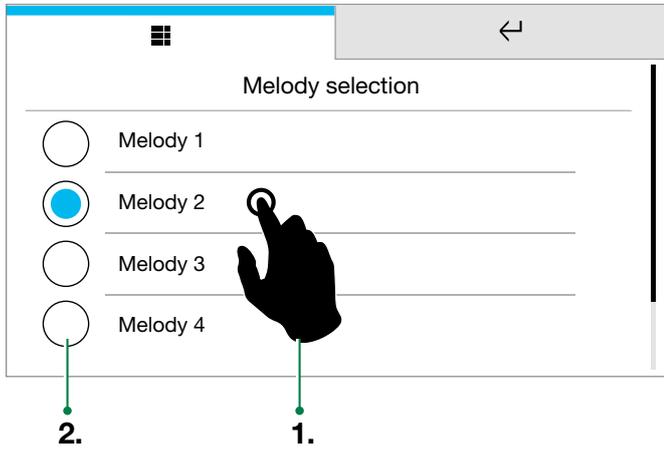

1. Press the name of the melody to hear a preview
 2. Press the circle to conform the selected ringtone
- Short press the icon to return to the previous screen

Installer setup menu

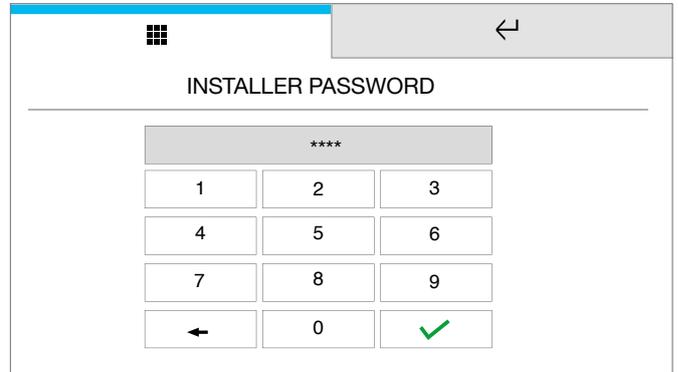

- Type in the password (default = 0000) and confirm

NAVIGATION TREE

- INSTALLER SETUP MENU**
- Directories**
- Intercoms
- CONFIGURE ViP ADDRESS
- Edit or delete a contact
- Actuators.....
- CONFIGURE ViP ADDRESS.....
- Doors
- Cameras.....
- External unit camera.....
- PAL camera
- IP (RSTP) Camera.....
- Key programming**.....
-
- Lock-release
- Actuator.....
- 1
- 2
-
- Intercom.....
- Self-ignition.....
- Alarms.....
- Lock-release
- Actuator
- Activate output
-
- Privacy / Doctor / Privacy Doctor
- Total reset**
- Addresses**
- ViP ADDRESS PROGRAMMING
- Set ringtone repetition**
- Set call times**
- Call divert**
- CONFIGURE ViP ADDRESS.....
- WAIT TIME.....
- ACTIVATE TIMED DIVERT
- ACTIVATE DIVERT WHEN BUSY

Alarms

 Alarm

 Panic

 Fire

 Priority call 4

Hands-free

For programming and configuration of the internal unit and the system parameters, use the ViP Manager 1449 software, which can be downloaded from pro.comelitgroup.com

CERTIFIED MANAGEMENT SYSTEMS



www.comelitgroup.com

Via Don Arrigoni, 5 - 24020 Rovetta (BG) - Italy

