

DESCRIPTION

The IXGW-LC-RY20 is a relay adaptor for the IXG Series IP multi-tenant video intercom system. This adaptor provides a Form C dry contact closure used for door release when paired with an IXG-DM7-HID entrance station.

The IXGW-LC-RY20 is equipped with 20 Form C relays. Up to 16 adaptors, along with the IXGW-LC, can be included in a building. Each relay can be configured and assigned to a specific IXG-DM7-HID entrance station. Individual relay contacts will activate when the door release for that entrance is activated. The elevator recall button on the IXG-2C7 tenant station can be used to activate a contact to recall the elevator to that specific floor.


FEATURES

- PoE compliant
- 20 Form C relays
- Relay rating (24V AC/DC, 500mA)
- 16 adaptors per building max., including IXGW-LC

IXGW-LC-RY20

Network Door Release Relay for IXG-DM7-HID

FEATURE CALL-OUT

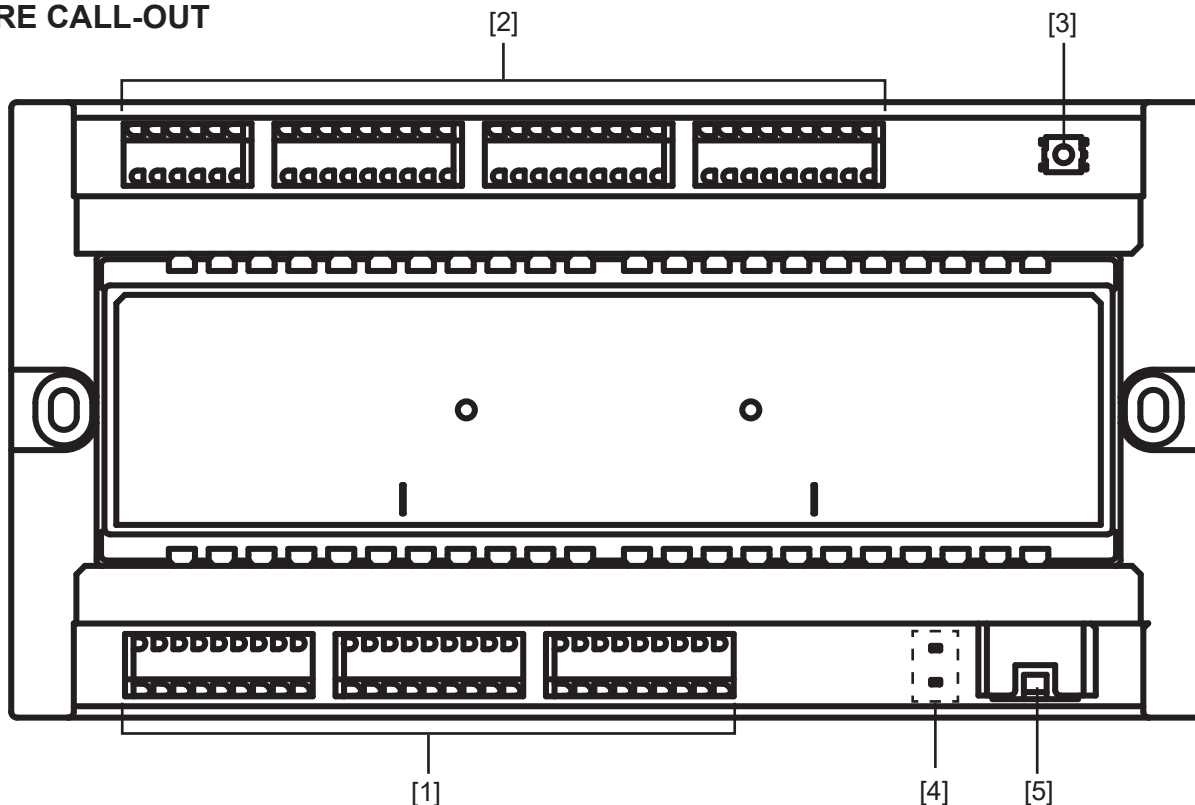

FEATURE CALL-OUT DEFINITIONS

- [1] Relays 1-9
- [2] Relays 10-20
- [3] Reset button
- [4] Status indicators (orange/green)
- [5] LAN port (PoE)

SPECIFICATIONS

- | | |
|------------------|---|
| Power Source: | PoE |
| Consumption: | 2.1W standby, 4.4W max. |
| LAN: | Ethernet
(10BASE-T, 100BASE-TX) |
| Packet Delivery: | Unicast, Multicast |
| Protocol: | IPv4/v6, TCP, UDP, HTTP,
HTTPS, IGMP, MLD, FTP,
DHCP, NTP, DNS, TLS |
| Encryption: | TLS 1.0, 1.1, 1.2 |
| Operating Temp: | 14° ~ 122°F (-10° ~ 50°C) |
| Dimensions: | 4-1/4" H x 8-1/4" W x 2-3/8" D |