


ICP-SDI-9114 SDI Splitter

www.boschsecurity.com



BOSCH
Invented for life

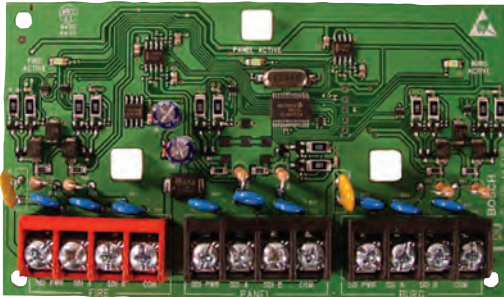

- ▶ Provides two independent, isolated SDI buses from a single SDI connection to the control panel
- ▶ Can be used to meet the requirements for a UL864 compliant combination control panel
- ▶ Does not affect the operation of the control panel or the associated SDI devices
- ▶ Additional power can be supplied by an external power supply

The ICP-SDI-9114 SDI Splitter allows the set up of two independent, isolated SDI buses from a single SDI connection on the control panel. When this accessory is installed with a control panel and wired to create separate SDI buses for fire and intrusion devices, the system is a UL864 compliant combination control panel.



Notice

The D9412GV3, D9412GV2, D7412GV3, and D7412GV2 control panels can be installed as a combination system per UL864, 9th edition requirements when used with the ICP-SDI-9114 SDI Splitter.

The ICP-SDI-9114 SDI Splitter is compatible with Bosch Security Systems, Inc.'s D9412GV3, D7412GV3, D7212GV3, D9412GV2, D7412GV2, D7212GV2, D9412G, D7412G, D7212G, and D9124 control panels.



Notice

The D7212GV3, D7212GV2, and D7212G are not rated for Commercial Fire.

Functions

Connections

The SDI splitter has three sets of four-position SDI terminals: PANEL, FIRE, and BURG. The PANEL terminals are used for the SDI connection to the control panel. The terminals labeled FIRE and BURG are handled equally, and either terminal can be assigned to any collection of devices that require two separate buses. The SDI splitter does not affect the operation of the control panel or the associated SDI devices.

LEDs

The SDI splitter has three green LEDs (labeled PANEL ACTIVE, FIRE ACTIVE, and BURG ACTIVE) that monitor bus activity.

Power

The SDI splitter operates on power from the control panel, but the DC current is limited to 550 mA for each bus (FIRE and BURG), or enough power for two D1255 keypads; two D1255RB, D1256RB, or D1257RB keypads; two D1260 keypads, or one D1265 keypad. An external power supply, connected with a common ground, is required to provide power for devices that exceed the 550 mA limit.

A total of up to 32 SDI devices can connect to the output buses. A fault to the power or data connections of one bus does not affect the other bus.

Certifications and approvals

| Region | Certification | |
|--------|---------------|---|
| USA | UL | UOXX: Control Unit Accessories, System (UL864, 9th edition) |
| | CSFM | 7167-1615:0243 |
| | CSFM | 7165-1615:0242 |
| | CSFM | 7165-1615:0238 |
| | CSFM | 7165-1615:0119 |
| | CSFM | 7167-1615:0239 |
| | FDNY-CoA | 6059 |

Installation/configuration notes

Mounting Considerations



Notice

UL requires that the SDI splitter be mounted in the same enclosure with the control panel, or in a separate enclosure in the same room within 20 ft (6.0 m) of the control panel and connected by conduit.

Wiring Considerations

Wiring from the control panel to SDI splitter should be 0.8 mm (22 AWG) to 2.0 mm (12 AWG) wire with a maximum wire length of 6.0 m (20 ft). The maximum impedance of the wire from the control panel to the SDI splitter must not exceed 1 Ω .

The maximum total wiring length for any single bus is 3048 m (10,000 ft). To determine the maximum impedance, maximum wire length and appropriate wire gauge for wiring from the SDI splitter to the SDI devices, refer to the specifications for each SDI device.

Parts included

| Quant. | Component |
|--------|-----------------|
| 1 | SDI splitter |
| 1 | Hardware pack |
| 1 | Literature pack |

Technical specifications

Environmental Considerations

| | |
|--------------------------|--------------------------------|
| Relative Humidity: | 93% maximum, non-condensing |
| Temperature (operating): | 0°C to +50°C (+32°F to +122°F) |

Mechanical Properties

| | |
|-------------------------|---|
| Dimensions (H x W x D): | 127 mm x 74 mm x 25.4 mm (5 in. x 2.9 in. x 1 in.) |
| Weight: | 0.13 kg (4.6 oz) |

Outputs

| | |
|---------------------|-----------------------------------|
| Current (BURG bus): | 550 mA maximum from control panel |
| Current (FIRE bus): | 550 mA maximum from control panel |

Power Requirements

| | |
|-------------------|------------------|
| Current: | 30 mA maximum |
| Voltage (supply): | 12.0 VDC nominal |

Ordering information

ICP-SDI-9114 SDI Splitter

Provides the ability to set up two independent SDI buses from a single SDI connection on the control panel.

Order number **ICP-SDI-9114**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com