

# LTC 2605/91 Video Manager

[www.boschsecurity.com](http://www.boschsecurity.com)



**BOSCH**  
Invented for life



- ▶ Centralized monitors and multiplexer operation
- ▶ Controls up to 16 Divar Digital Video Recorders or System4 Multiplexers
- ▶ Uses up to four keyboards with optional port expander
- ▶ Auto-sensing setup - no user programming required

The LTC 2605/91 Video Manager provides advanced switching capability in system configurations that incorporate either Divar Digital Video Recorder devices or System4 Series Multiplexer devices. The unique video management capability of this unit reduces the number of monitors required in the system. This way, a single control station can easily control up to sixteen connected devices.

The Video Manager supports up to six monitor outputs, and using the LTC 2604 Series Keyboard Port Expander, it can accommodate up to four independent keyboards. Each keyboard is able to direct switching of the devices, mode selection, programming, and pan/tilt/zoom functions on the monitors under its control. When using the Video Manager with at least one IntuiKey Series keyboard, automatic alarm switching is supported. Two of the Video Manager's monitor outputs can be connected to dedicated monitors for automatic display of alarm video from any of the devices during alarm conditions. When alarms are not present, these monitor outputs simply generate a black raster signal.

By design, system setup of the Video Manager is quick and easy - just plug it in and it is ready to operate.

## Functions


Operation is simple: As shown in the following figures, the Video Manager accepts the Monitor A and Monitor B outputs from each of the video devices. Using the system keyboard, the system intelligently routes the video outputs from any one of the sixteen devices, to a dedicated pair of monitor outputs.

When using two keyboards, the system intelligently routes the video outputs from any of the sixteen devices to two pairs of monitor outputs. Each keyboard has independent control of the video from any of the devices to its associated monitor pair. Adding a third keyboard to the system allows video to be routed from any of the devices to a third station having a single monitor. Complete control over this monitor is available using the keyboard dedicated to the station. Connection of a fourth keyboard provides similar functionality to a monitor at a fourth monitoring station. As before, complete control over this monitor is available using the keyboard at this location.


**Certifications and approvals**

Electromagnetic Compatibility (EMC)	Complies with FCC Part 15, ICES-003 and CE regulations
Safety	Complies with CE regulations, UL, CSA, EN and IEC Standards


**Installation/configuration notes**

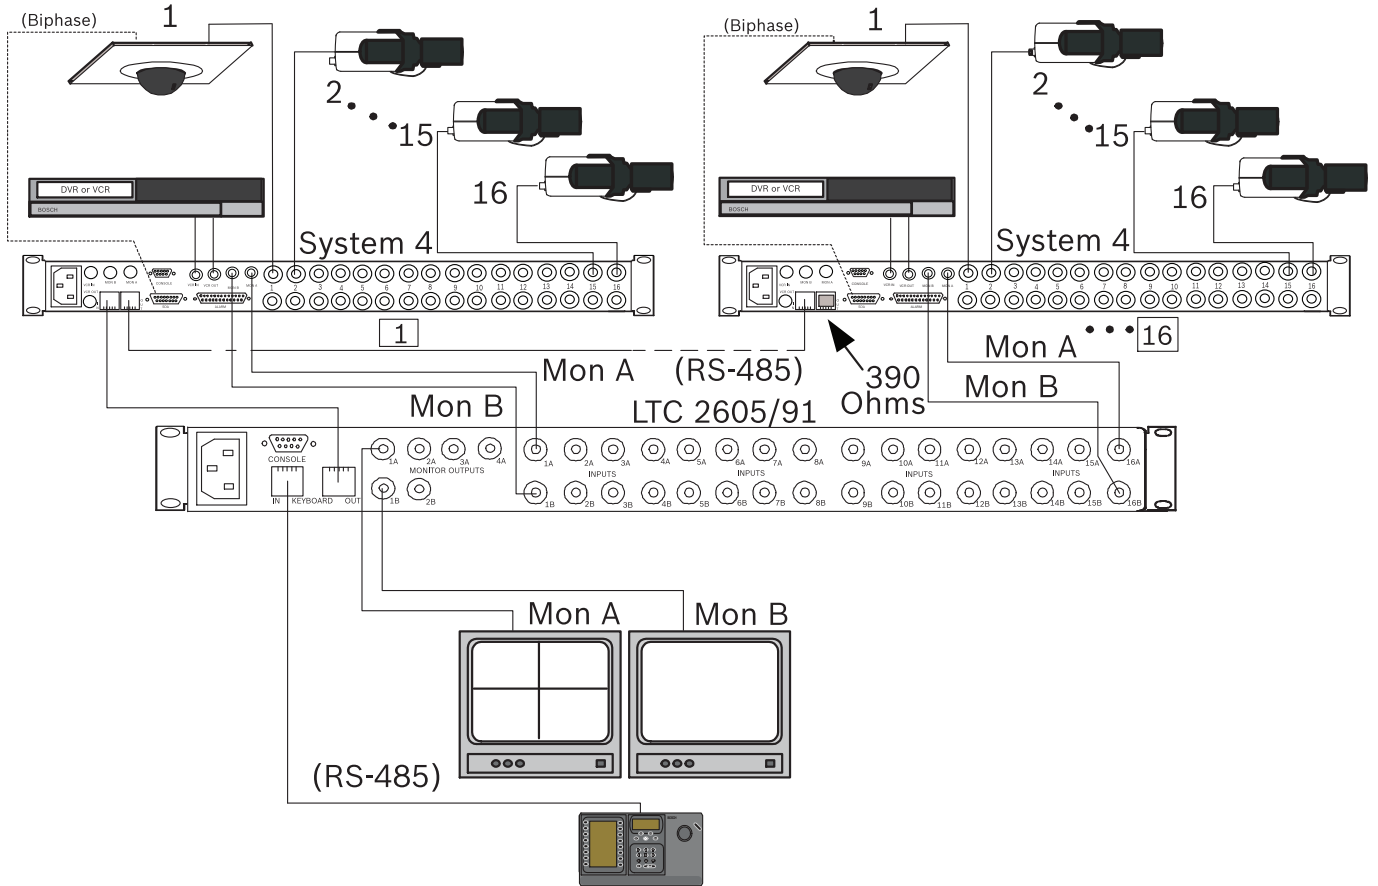

LTC 2605/91 Video Manager with System4 Multiplexers and IntuiKey Keyboard

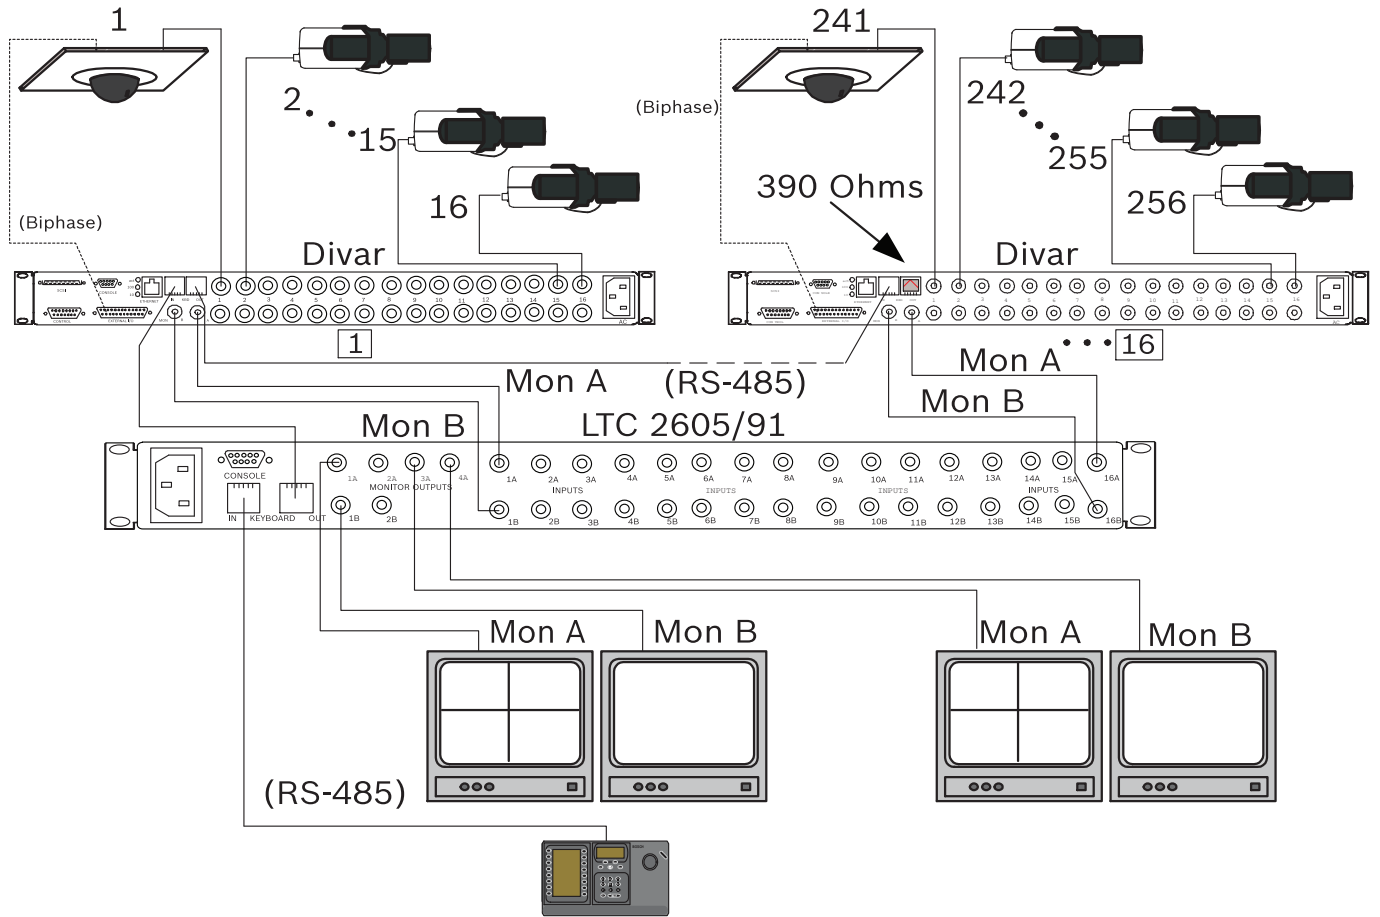

Video Manager with Divar Digital Video Recorders  
Including Alarm Monitor Pair

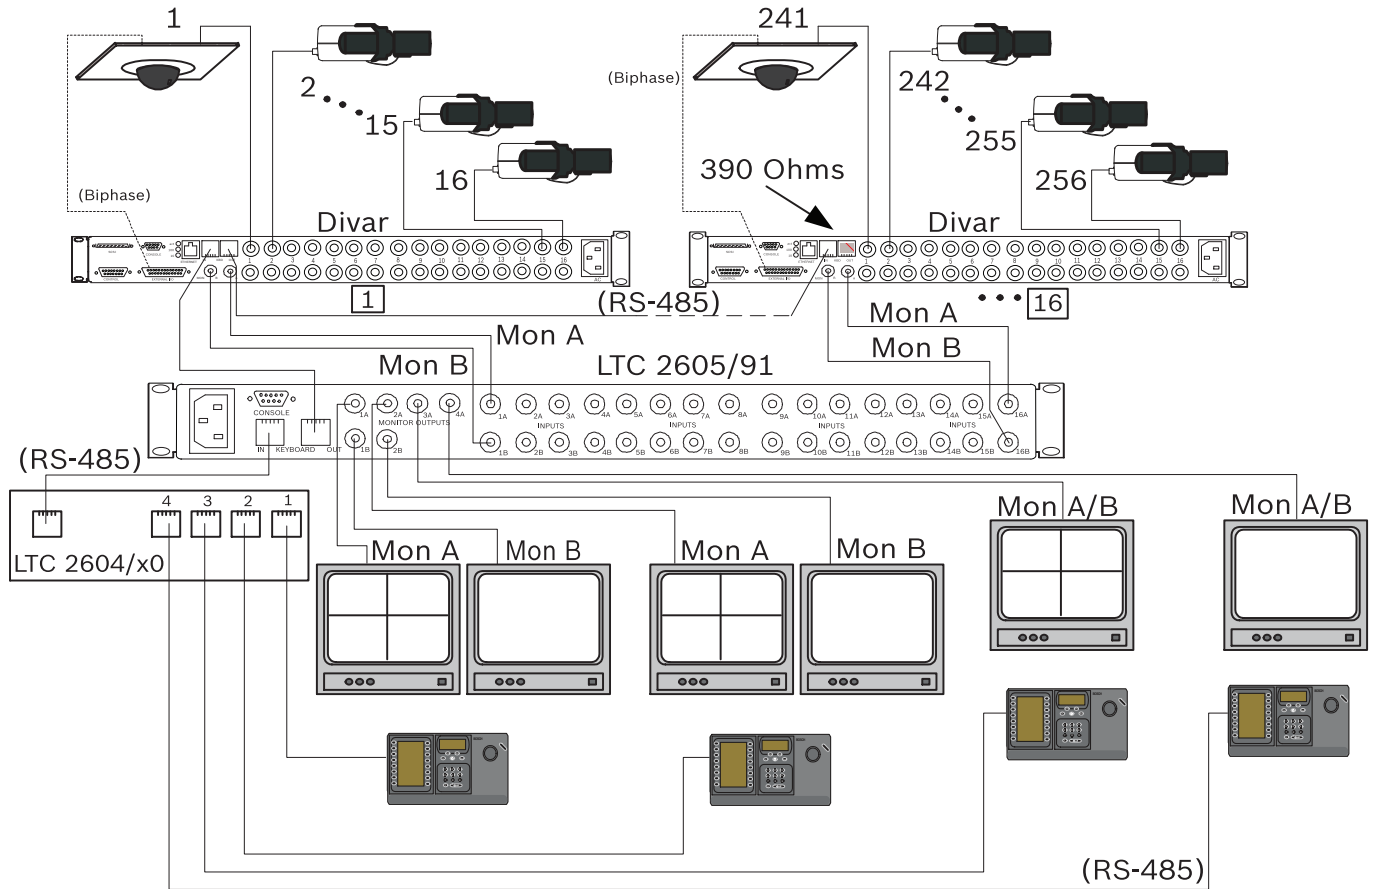

LTC 2605/91 Video Manager with Divar Digital Video Recorders and 4 IntuiKey Keyboard Control Stations

**Technical specifications**

**Electrical**

Model Number	LTC 2605/91
Voltage Range1	108 to 253, 50/60 Hz
Power at Rated Voltage	10 W

1. Unit contains a switching power supply.

Synchronization	Accepts PAL, CCIR, NTSC, and EIA RS-170
Connectors	Video inputs and monitor outputs: 32 BNC Monitor connections: 6 BNC

**External Accessory Interfaces**

Console	Not used
Keyboard	Two (2) RJ-11

**Mechanical**

Construction	Steel chassis with sheet metal cover and plastic bezel
Finish	Charcoal
Dimensions	440 x 305 x 44 mm (17.3 x 12 x 1.73 in.)

(W x D x H)	
Weight	4 kg (8.8 lb)

**Environmental**

Operating Temperature	4°C to 55°C (40°F to 131°F)
Storage Temperature	-40°C to +60°C (-40°F to 140°F)
Humidity	0%–95% relative, non-condensing

**Compatibility**

Divar digital video recorders	All Series 1 & 2 models
IntuiKey Keyboard	All models, including KBD-Digital, KBD-Mux, KBD-Universal
LTC 2600 Series multiplexers	All "System4" models
LTC 2604 Series multiplexer port expanders	All models

## Ordering information

### LTC 2605/91 Video Manager

for use with Divar all Series 1 & 2 models and System4 Multiplexer, 120/230 VAC, 50/60 Hz  
Order number **LTC 2605/91**

### Accessories

#### KBD-Universal Keyboard

IntuiKey Universal Keyboard for use with Allegiant, Divar, System4 Multiplexers, Bosch VMS, and VIDOS  
Order number **KBD-UNIVERSAL**

#### KBD-Digital Keyboard

IntuiKey Digital Keyboard for use with Divar Digital Video Recorders, System4 Multiplexers, Bosch VMS, and VIDOS  
Order number **KBD-DIGITAL**

#### Represented by:

##### Americas:

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

##### Europe, Middle East, Africa:

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

##### Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

##### China:

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

##### America Latina:

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
latam.boschsecurity@bosch.com  
www.boschsecurity.com