


D130 Auxiliary Relay Module

www.boschsecurity.com



BOSCH
Invented for life

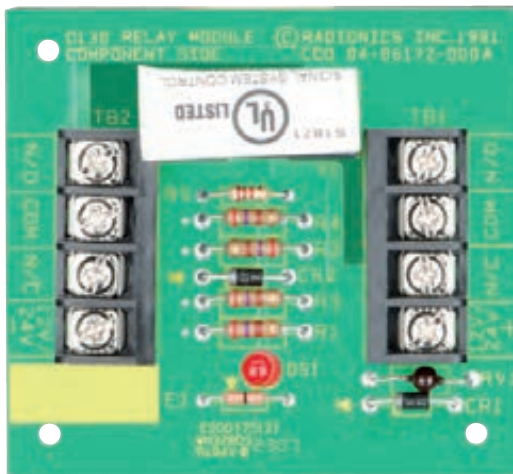

- ▶ 12 VDC or 24 VDC relay
- ▶ Allows switching of current or voltage
- ▶ Two non-latching Form C dry contact outputs
- ▶ Red LED shows coil is energized
- ▶ Mounts in control panel enclosure

The D130 Auxiliary Relay Module can be used with all Bosch Security Systems control panels. The relay module consists of a 12 VDC or 24 VDC relay. This device allows the system to handle larger amounts of current or different voltages that are beyond the control panel's auxiliary power rating, or the rating of modules such as the D8129 OctoRelay.



Notice

A UL Listed, 12 VDC or 24 VDC auxiliary power supply is required to supply power to the D130's coil.

The relay is polarized and has two sets of non-latching Form C contacts. When the contacts are in the inactive state, the normally-closed terminal has continuity with the common terminal. When the contacts are in the active state, the normally-open terminal has continuity with the common terminal. The relay is activated by switching polarity. A red LED lights to indicate the coil is energized.

System overview

Initiating Circuit Application

The D130 is commonly used with a D125B Dual Class B Initiating Module and a UL Listed 24 VDC power supply. In this configuration power to the detectors can be interrupted by a command from the fire alarm control panel (FACP).

Certifications and approvals

Region	Certification	
USA	UL	APOU: Proprietary Alarm Units (UL1076), UOJZ: Control Units, System (UL864, 9th edition)
	FM	
	CSFM	7165-1615:0119 7165 -- FIRE ALARM CONTROL UNIT (COMMERCIAL)
	CSFM	7165-1615:0238 7165 -- FIRE ALARM CONTROL UNIT (COMMERCIAL)
	CSFM	7165-1615:0242 7165 -- FIRE ALARM CONTROL UNIT (COMMERCIAL)
	CSFM	7167-1615:0239 7167 -- CONTROL UNIT (HOUSEHOLD)

Region	Certification	
	FDNY-CoA	#6174 UL 864 9th Edition
	FDNY-CoA	6059 [D9412GV3 & D7412GV3]
	NYC-MEA	12-92-E, Vol. 12 12-92-E, Vol. 12
	NYC-MEA	12-92-E, Vol. 15 12-92-E, Vol. 15
	NYC-MEA	12-92-E, Vol. II 12-92-E, Vol. II

Installation/configuration notes

Compatible Products

The following products are compatible with the D130 Auxiliary Relay Module:

Category	Product ID	Product Description
Control Panels		All Bosch Security System control panels and FACPs
Modules	D125B	Dual Class B initiating module
	D8129	OctoRelay module
Power Supplies	D9142F	24 VDC auxiliary power supply

Mounting

The D130 Auxiliary Relay Module attaches to a mounting plate for easy mounting in any enclosure. The assembly can be mounted in the control panel's enclosure by means of supplied screws.

Wiring Considerations

The D130 can connect directly to the FACP or can connect through a D8129 OctoRelay Module. Refer to the installation instructions for the FACP or the D8129 for specific wiring requirements.

Parts included

Quantity	Component
1	D130 module
1	Mounting plate
1	Hardware pack
1	Literature pack

Technical specifications

Properties

Dimensions:	2.75 in. x 3.0 in. (7 cm x 7.6 cm)
-------------	------------------------------------

Outputs

Rating:	10 mA at 5 VDC minimum 5 A at 30 VDC maximum
Type:	Two non-latching Form C

Power Requirements

Current:	60 mA maximum
Voltage (operating):	12 VDC or 24 VDC nominal

Ordering information

D130 Auxiliary Relay Module

12 VDC or 24 VDC relay. Allows switching of current or voltage.

Order number **D130**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com