

# CELL SWITCH PRIME

T-Mobile SIM Card  
Included at No Charge  
for easy activation.

## RANGE

Access Control

## CELLULAR ACCESS CONTROL RELAY

CELL SWITCH PRIME





Open gates with  
an app.

- Open gates or door from a phone using caller ID number recognition.
- Stores up to 100 authorized numbers.
- Easy to program by SMS text.
- Free iPhone and android apps for easy control of gates .
- 1 status input for checking gate status.
- Activity log to check which phone users called your gate and when with time and date log.
- 7 day time clock feature built in, for automatic opening and closing at pre-set times and days of the week (up to 40 events).
- 3 year limited warranty.



**ecosol**  
COMPATIBLE

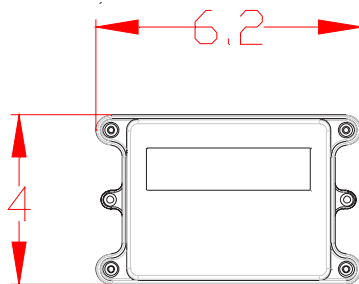

## General

Voltage: 12v de- 24v ac.  
Solar operable: Yes.  
Current on standby: 55mA.  
Operating Current: 300mA.  
Peak Demand Current: 2 amps.

## Cellular module

Relays: 2 relays, max 2 amps, 24v ac/dc load.  
Latching: Yes.  
Caller ID users: 100.  
Programming: SMS.  
Network compatibility: AT&T, T-Mobile



Be ahead

BFT Americas, Inc.  
6100 Broken Sound Parkway N.W.  
Boca Raton, FL 33487

T: 561 995 8155  
T: US. 1877 995 8155  
info.bft@bft-usa.com  
www.bftaccess.com  
www.bft-usa.com