


# B444 Conettix Plug-in 4G LTE Cellular Communicator

www.boschsecurity.com



**BOSCH**  
Invented for life

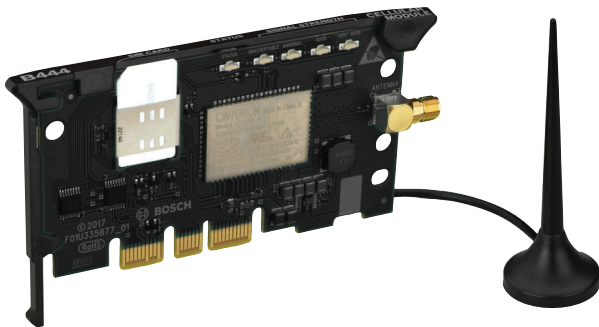

- ▶ Secure Conettix IP communication from compatible Bosch panels to Bosch receivers using Verizon 4G LTE cellular network
- ▶ Remote programming and monitoring of compatible Bosch panels
- ▶ Personal SMS message and e-mail notification options
- ▶ Direct configuration from Bosch Remote Programming Software (RPS) eliminating the need for separate configuration
- ▶ Simple LED status information and advanced keypad diagnostics available with easy 2 step plug-in installation, troubleshooting, and maintenance

The cellular communicator enables secure two-way IP communication over the Verizon 4G LTE cellular network by plugging into a compatible control panel or communicator interface.

Typical applications are:


- Alarm reporting to a central station
- Remote control panel programming through Remote Programming Software with supported control panels
- Remote monitoring and control through a mobile application with supported control panels
- Personal notification using SMS for compatible control panels



**Notice**

Cellular capability requires an Installer Services account and appropriate data plan.

**System overview**

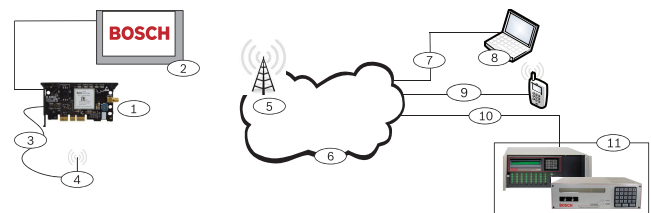

Callout — Description	Callout — Description
1 — Cellular communicator	7 — Remote PC's network connection
2 — Compatible control panel	8 — Remote PC running RPS
3 — Antenna cable	9 — Personal SMS notification
4 — Magnetic base antenna	10 — Ethernet connection

5 — Base station on wireless carrier's network	11 — Central monitoring station
6 — IP network cloud	

## Functions

### Activation

The B444 module is shipped pre-activated. The B444-C module needs to be activated. Activate the module by emailing: [installer.services@us.bosch.com](mailto:installer.services@us.bosch.com), or by call Bosch Installer Services at: 800-289-0096, option 6.

### Conettix IP communication via Cellular

In addition to the security provided by the network operator, the cellular communicator uses our Conettix IP protocol that supports:

- Flexible polling intervals
- Resistance to Denial of Service attacks
- 128-bit to 256-bit AES encryption with Cypher Block Chaining
- Anti-replay/anti-substitution keys

### Easy Installation, troubleshooting, and maintenance

- No networking expertise required at field site (no firewall or router settings)
- No PC or special tools required for installation and troubleshooting
- Service plans and settings managed through RPS
- Diagnostic LEDs for on-site troubleshooting

LED	Function
Blue (heartbeat)	System status indicator
Red	Unacceptable signal strength
Yellow	Marginal signal strength
1 Green	Good signal strength
2 Green	Very good signal strength

### Remote programming of Bosch control panels

The cellular communicator supports secure RPS programming of compatible Bosch control panels.

### Personal notification and control

The cellular communicator supports the Bosch Remote Security Control mobile application and can be configured for SMS personal notification reports to mobile phones or e-mail addresses.

### Remote Connect Service Support

Remote Connect Service enables a secure control panel connection to remote programming software (RPS) using Bosch Cloud services. The service allows a secure TLS connection to a control panel without specific port and router settings and without a static IP or DNS.

## Certifications and approvals

Region	Certification	
USA	Verizon	Open Development Certified

Region	Regulatory compliance/quality marks	
USA	UL	UL 864 - Standard for Control Units and Accessories for Fire Alarm Systems
	UL	UL 1076 - Proprietary Burglar Alarm Units and Systems
	UL	UL 1610 - Central Station Burglar Alarm Units
	UL	UL 365 - Police Station Connected Burglar Alarm Units
	UL	UL 609 - Standard for Local Burglar Alarm Units and Systems
	UL	UL 636 - Holdup Alarm Units and Systems
	UL	UL 985 - Household Fire Warning System Units
	UL	UL 1023 - Household Burglar Alarm System Units
	FCC	Part 15 Class B

## Installation/configuration notes

### Mounting considerations

The module plugs into any compatible control panel, available in a variety of enclosures.

### Wiring considerations

The module connects to any compatible control panel without tools or physical wiring for power. When used with the B450, the B450 is wired to the control panel data bus. The cellular module has a screw on SMA antenna connection.

### Compatibilities

Devices	B9512G/B9512G-E, B8512G/B8512G-E B6512 B6512/B5512/B4512/B3512, B5512E/ B4512E/B3512E control panel with firmware v3.05 or higher (direct insertion) The module is compatible with most Bosch control panels when used with a B450 Conettix Plug-in Communicator Interface with firmware v3.05 or higher. Refer to the B450 datasheet for complete control panel compatibility listings. B465 Conettix Universal Dual Path Communicator with firmware v2.0 or higher. B40 antennas
Cellular	4G LTE - Cat 1

### Commercial Fire and Burglary applications

Approved for Commercial Fire/Burglary applications as sole, primary, or secondary communications path when the system is installed to the NFPA-72 specification

### Technical specifications

#### Electrical

Current (operating)	Standby: 35 mA Alarm: 100 mA
Voltage (operating)	12 VDC nominal
Radio	Verizon LTE CAT 1 Band 4 and 13

#### Environmental

Environment	Environmental Class III - Indoor
Relative humidity	5 - 93% at +32°C (+90°F) non-condensing
Operating temperature	0°C to +49°C (+32°F to +120°F)

#### Mechanical

Board dimensions	2 in x 3.68 in x 0.60 in (50 mm x 93.5 mm x 15.25 mm)
Antenna (included)	<ul style="list-style-type: none"> <li>Magnetic base omni-directional</li> <li>8.2 ft (2.5 m) cable with SMA connector</li> </ul>

### Ordering information

#### **B444 Plug-in cellular module, VZW LTE, hot**

Pre-activated 4G LTE cellular communicator for secure two-way IP communication on the Verizon Wireless LTE network.

Order number **B444**

#### **B444-C Plug-in cell module, VZW LTE, cold**

Non-activated 4G LTE cellular communicator for secure two-way IP communication on the Verizon Wireless LTE network.

Order number **B444-C**

#### Represented by:

**Europe, Middle East, Africa:**  
 Bosch Security Systems B.V.  
 P.O. Box 80002  
 5600 JB Eindhoven, The Netherlands  
 Phone: + 31 40 2577 284  
 emea.securitysystems@bosch.com  
 emea.boschsecurity.com

**Germany:**  
 Bosch Sicherheitssysteme GmbH  
 Robert-Bosch-Ring 5  
 85630 Grasbrunn  
 Germany  
 www.boschsecurity.com

**North America:**  
 Bosch Security Systems, Inc.  
 130 Perinton Parkway  
 Fairport, New York, 14450, USA  
 Phone: +1 800 289 0096  
 Fax: +1 585 223 9180  
 onlinehelp@us.bosch.com  
 www.boschsecurity.us

**Asia-Pacific:**  
 Robert Bosch (SEA) Pte Ltd, Security Systems  
 11 Bishan Street 21  
 Singapore 573943  
 Phone: +65 6571 2808  
 Fax: +65 6571 2699  
 apr.securitysystems@bosch.com  
 www.boschsecurity.asia