



- K-TX2: 4 button RF wireless transmitter with 125kHz proximity coil
- K-INTX2: 4 button RF wireless transmitter with matching Indala proximity coil
- K-STX2-1K: 4 button RF transmitter with matching K-SECURE1K coil
- K-STX2-4K: 4 button RF transmitter with matching K-SECURE4K coil

- Combines the convenience of a long range radio frequency fob with an onboard proximity chip for use at proximity HID 125kHz (K-TX2) or INDALA (K-INTX2) readers .
- Receiver is contained in a weather resistant NEMA enclosure and is suitable for outdoor installations.
- Ideal for security access control applications such as securing garage or gate entries and/or exits.
- Receiver provides two hardwired 36bit Keyscan secure Wiegand outputs for connection to Keyscan's family of access control units (ACUs). Two Wiegand outputs provide an ideal solution for multiple gate control using a single receiver.
- Transmitters offer four-buttons, and are designed to support multiple gate and multiple receiver installations.
- Receiver offers innovative RF sensitivity and range control. Range may be adjusted from 12" (0.3m) to a factory defaulted maximum of 150' (45.7m).
- RF operation uses an ultra high 433Mhz Frequency.
- Employs a rolling 40 bit code combined with a 256 bit key for encrypted anti-sniffing and anti-playback protection.
- Rugged long life transmitters tested to over 35,000 button presses.


RF RECEIVER RF FOBS WITH PROXIMITY CHIP

K-RX (RF Receiver), K-TX2 (RF Fob with HID chip), K-INTX2 (RF Fob with INDALA chip)

FEATURES AND BENEFITS

- Fast installation with Keyscan Access Control Unit. Simple fob enrollment in Keyscan software. One cardholder number for both RF activations and proximity activations
- Allows for integration to gate or garage applications without costly trenching or installation of pedestals to mount readers.
- Permits tracking, usage reporting and assigning access privileges (including time and day restrictions) when used with Keyscan access control units and software.
- Fobs work in long range RF mode as well as standard proximity format for other access control secure doors.
- Fobs may be ordered with HID 125kHz K-TX2 or INDALA (K-INTX2) proximity chip sets.
- A standalone mode with TTL driven relay output is available for use without access control integration.

APPLICATIONS

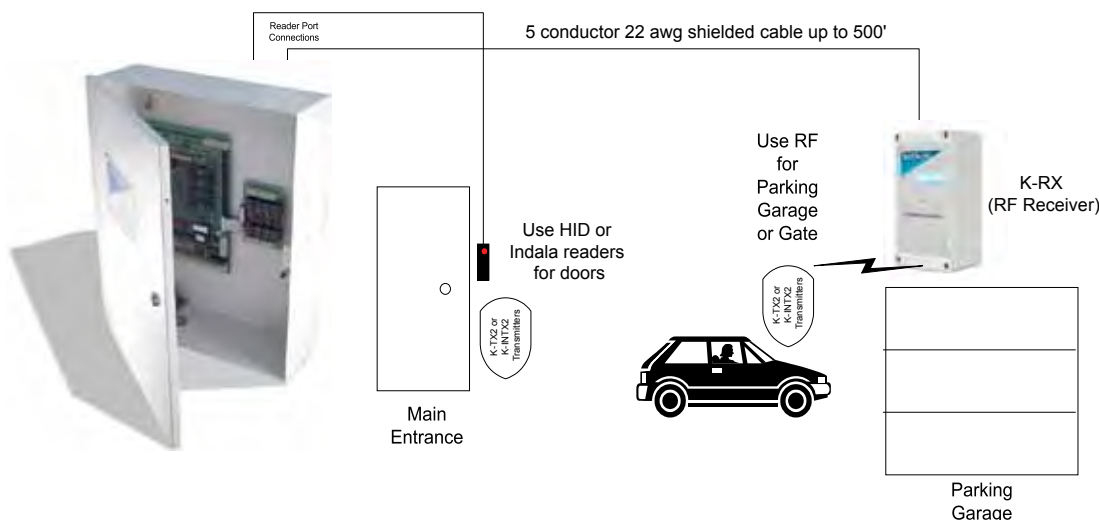

SPECIFICATIONS

MODEL #:	K-RX	MODEL #:	K-TX2 (HID Prox), K-INTX2 (INDALA)
INPUT POWER:	10 to 24 VDC @ 80mA (nominal)	ENCODING:	Code Hopping with 256 bit encryption
RF INPUT SIGNAL:	433Mhz	OPERATING TEMP:	-22°C to 50°C -7°F to 122°F
COMM FORMAT:	Wiegand 36 bit hardwired digital output	CASE MATERIAL:	High Density Plastic Water Resistant Keypad Membrane
DIMENSIONS:	6 5/16" x 3 1/2" x 2 3/8 Inches 16.0 x 9.0 x 6.1 cm	POWER REQ:	27A, NM27 sized 12Volt alkaline battery Field replaceable
OPERATING TEMP:	-22°C to 50°C -7°F to 122°F	OUTPUT:	RF: 433MHz UHF Proximity: 125khz

KEYSCAN INC.

901 Burns Street East, Whitby, Ontario L1N 6A6
Phone: 905.430.7226 Toll Free: 1.888.539.7226 Fax: 905.430.7275
www.keyscaan.ca

Keyscan Inc. reserves the right to alter designs and specifications without notice or obligation

Rev.: 10-2010