

Explosion Proof 0-10V Rotary Dimmer Switch - 50mA - C1D1&2 - C2D1&2 - Class III EXP-DRW-MOD1

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



EXP-DRW-MOD1 Explosion Proof 0-10V Rotary Dimmer Switch

Switch Type: 0-10V Dimmable Rotary Switch
Max Amperage: 50 mA
Grounding: Single Internal Housing Ground Screw
Dimensions: 5.88" L x 3" W x 2.25" D
Configuration: Front Mounted Rotary Switch
Hub Quantity: (2) Feed Through or (1) Dead End
Ambient Temp Rating: -20°C to +65°C
Unit Materials: Copper-free Cast Aluminum
Mounting: External Mounting Lugs on Body
Hub Quantity: (2) Feed Through or (1) Dead End
Hub Size: 1/2" or 3/4"
Color: Gray

Ratings/Approvals

Class I Divisions 1 & 2 Groups C & D
Class II Divisions 1 & 2 Groups E, F, G
Class III, Divisions 1 & 2
NEMA 7, Groups C & D
NEMA 9, Groups E, F & G

Special Orders- Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-214-616-6180

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

Made in Texas

The Larson Electronics EXP-DRW-MOD1 Explosion Proof Dimmable Rotary Switch is Listed Class I Division 1 & 2 Groups C & D, Class II Division 1 & 2 Groups E, F and G and Class III. This 0-10V dimmable explosion proof switch has a max amperage of 50 mA and provides a safe and secure method for operators to adjust the brightness of explosion proof lights connected to the switch in order to best accommodate the situation or workplace while maintaining safety within hazardous environments. NOTE: This 0-10V Explosion Proof Rotary Dimmer Switch only works to adjust the brightness level of connected lights. It does not power lamps on or off.

This explosion proof rotary dimmer switch is ideal for operators seeking a high quality explosion proof switch rated for use in hazardous areas designated Class I Division 1 & Class 2 Groups C & D, Class II Division 1 & 2 Groups E, F and G and Class III environments. The entire unit is constructed of copper free cast aluminum. This unit is easily wall mounted via integral mounting tabs at two corners of the housing. Operators can choose between two hub sizes of either 1/2" or 3/4" and either a feed through or dead end configuration.

This unit is suitable for use in environments where combustible dusts and particulates may be present as well as any other hazardous locations. This explosion proof dimmable rotary switch offers operators smooth, flicker-free dimming of lights for precise control of brightness level while maintaining the power delivered to the lamp. The EXP-DRW-MOD1 explosion proof dimmer switch

also works to save energy while dimming reducing energy costs and helping to extend the life of the connected lamp.

The EXP-DRW-MOD1 0-10V dimmable rotary switch also features surge protection technology, advanced heat sinks to extend the service life of the switch and protection from possible interference from radios and other equipment. The unit is also very user friendly as the position of the rotary dial indicates the perceived light level.

This rotary dimmer switch is compatible with explosion proof dimmable light fixtures with V+ and V- dimming control wires. This dimmer is not compatible with voltage dimming, the driver/ballast must have 0-10V control wires for dimming to be compatible.


Note on Voltage/Amperage: This unit is a dimmer ONLY. This switch does not carry the voltage load of the power source for the lamps being controlled. Because of this, there is no amperage rating because no amperage is flowing through the unit. This is NOT a combination on/off dimmer switch. We do offer a combination on/off switch with rotary dimmer. 0-10V dimming is a control voltage of 0-10V compatible devices. The voltage range is 0-10V, with 0V being completely off and 10V being full power. The max resistance is calculated for up to 25 devices being controlled by this unit. Since the switch is not carrying the load for power or make/break sequence of turning the units on/off, it does not matter what type of dimmable devices are powered from this as long as they are 0-10V capable and have the appropriate 0-10V dimming control wires (commonly seen as grey/violet wires). This dimmer is NOT compatible with incandescent lamps or screw-in compact fluorescent lamps. This unit IS compatible with LED, HID, fluorescent, compact fluorescent, induction, and any type of lamp that the power supply or ballast is 0-10V capable and has 0-10V control wires.

The EXP-DRW-MOD1 explosion proof switch cover and housing box is constructed of copper free cast aluminum for superior performance and durability. These dimmer switches are not factory sealed and require external sealing fittings. Two external mounting lugs provide simple and secure mounting of the unit to walls and flat surfaces. This explosion proof switch is available with either 1/2" or 3/4" NPT tapped hubs. The conduit openings are provided on the top and bottom of the unit in feed through versions while dead end versions have a single conduit hub, providing easy and secure connection to main power line supplies.

Suggested Applications: Manufacturing, Industrial, Warehouse, Lighting, Lighting, Wet areas or Locations Where Combustible Dust is Present.



Frequently Asked Questions (FAQ)

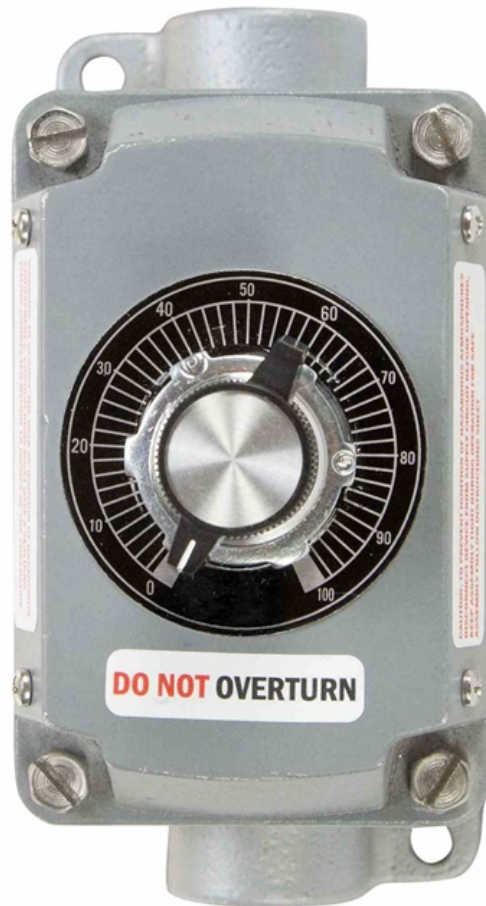







Options:

EXP-DRW-MOD1-Hub Config-Configuration

Example: EXP-DRW-MOD1-0.5IN-FT

Hub Config	
1/2 INCH	-0.5IN
3/4 INCH	-0.75IN

Configuration	
FEED-THRU	-FT
DEAD-END	-DE

Links (Click on the below items to view):

- [Operations Manual](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [HigResPic8](#)
- [Video1](#)
- [Video2](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)