

## AXIS T98A-VE Surveillance Cabinet Series

A robust cabinet for easy installation of critical system equipment.



- > Outdoor-ready
- > IP66- and NEMA 4X-rated
- > IK10-rated
- > Ease of installation
- > Compatible with Axis network video cameras

AXIS T98A-VE Surveillance Cabinet Series is a unique, outdoor-ready cabinet, specially designed for Axis outdoor network cameras. AXIS T98A-VE Surveillance Cabinet Series protects mains power and low-voltage units from tough weather and vandalism.

AXIS T98A-VE Series is a system solution that saves time and money in the field. AXIS T98A-VE Surveillance Cabinet Series is designed for electrical safety and to enable installation in steps, with a compartment that fits many accessories such as midspan, power supply and media converter switches used for a network camera installation.

AXIS T98A-VE Surveillance Cabinet Series comes with a mounting plate to simplify installation and cable protection attachment. The cabinet is IP66- and NEMA 4X-rated for protection against the ingress of dust and high pressure water jets from any direction as well as IK10-rated for protection against impact and vandal acts. An optional electrical safety kit is available, which includes surge protection, a fuse and a door switch to detect intrusion or vandalism of the cabinet.

AXIS T98A-VE Series comes in four versions for flexibility, dependent on whether fixed, fixed dome, or PTZ dome cameras are used, or if the cabinet is used as standalone unit. The cabinet blends in together with the camera and can be installed on wall, pole or corner. The camera can be mounted on the door of the cabinet for a sleek design and easy installation. AXIS T98A-VE cabinet is ideal in city surveillance or critical infrastructure installations where a sturdy, vandal resistant and water-protected box is a must.



# Versatile, outdoor-ready cabinets for easy and sleek installation

AXIS T98A-VE Series combines and protects mains-powered and low-voltage components in an easy-to-install, sleek design that blends together with outdoor-ready PTZ, fixed and fixed dome IP cameras.

## Ease-of-installation

AXIS T98A-VE offers several ease of installation features to simplify the work for the installers. With a selection of optional mounting brackets, AXIS T98A-VE can be installed on a wall, pole or building corner. The polycarbonate cabinet base is extremely lightweight and can easily be carried in one hand. For maximum installation flexibility the cabinet door can be left or right hinged. To facilitate cable routing the cabinet is fitted with a specially designed mounting plate allowing the cabinet base to temporarily be mounted in a higher position and the hinges have a stop that locks the cabinet door at 105°. The cabinet is also designed with pre-mounted DIN rails to make it easy to connect components.

## Vandal-resistant to withstand adversities

The polycarbonate cabinet is IP66-rated for protection against the ingress of dust and high pressure water jets from any direction. The NEMA 4X rating protects against windblown dust, salt spray, rain, hose-directed water, and damage from external ice formation. It provides also IK10-rated material for protection against impact and vandalism. The surveillance cabinets support vibration rating 4M4 and 4M3 (AXIS T98A18-VE).

## Separated compartments to enhance security


For better installation and improve cost efficiency, the inner compartment with a DIN rail can be split into two sections: one to fit mains power units and a second for low-voltage units that do not require installation by a certified electrician. An optional electrical safety kit is available, which includes surge protection, a fuse and an alarm-door switch to detect cabinet intrusion or damage.



## Ease of installation features



Lightweight polycarbonate surveillance cabinet



Hinge stop at 105°



Pre-mounted and molded DIN rails


# Technical Specifications – AXIS T98A-VE Surveillance Cabinet Series

General	
<b>Model</b>	AXIS T98A15-VE Surveillance Cabinet AXIS T98A16-VE Surveillance Cabinet AXIS T98A17-VE Surveillance Cabinet AXIS T98A18-VE Surveillance Cabinet
<b>Supported cameras</b>	AXIS T98A15-VE: Standalone AXIS T98A16-VE: AXIS Q19-E, AXIS Q17-E, AXIS Q16-E, AXIS P13-E, AXIS M11-E, AXIS T92E/T93E05 Housings AXIS T98A17-VE: AXIS P33-VE Network Cameras AXIS T98A18-VE: AXIS T91A61 Wall bracket, supporting AXIS Q60, AXIS P55 and AXIS P33/M32 Series with pendant kit
<b>Cabinet</b>	Polycarbonate cabinet and stainless steel mounting plate IP66- and NEMA 4X-rated, IK10 impact-resistant Color: white NCS S 1002-B and stainless steel
<b>Environment</b>	Indoor/Outdoor


<b>Operating conditions</b>	-40 °C to 75 °C (-40 °F to 167 °F)* Humidity 10 - 100 % RH (condensing) <i>*Temperature range may vary with the network camera and its accessories. Please visit <a href="http://www.axis.com/products/cam_housing/t98ae/combinations.htm">www.axis.com/products/cam_housing/t98ae/combinations.htm</a> for specific details.</i>
<b>Protection rating</b>	IEC 60529 IP66, NEMA 250 rating Type 4X, IEC 62262 IK10, vibration 4M4 <b>AXIS T98A18-VE:</b> Vibration 4M3
<b>Approvals</b>	IEC 60068-2-6, IEC 60068-2-27 IEC/EN/UL 60950-1, IEC/EN/UL 60950-22 IEC 60529 IP66, IEC 62262 IK10, NEMA Type 4x UL 50, UL 50E
<b>Weight</b>	3.5 kg (7.7 lb.)
<b>Included Accessories</b>	Installation Guide, pre-mounted cable gaskets, pre-mounted DIN rail, cable clamps, cable straps, power cover, device mounting bracket <b>AXIS T98A16-VE/T98A17-VE/T98A18-VE:</b> Additional screws for mounting the camera

## Dimensions (H x W x D)


Cabinet outer dimensions

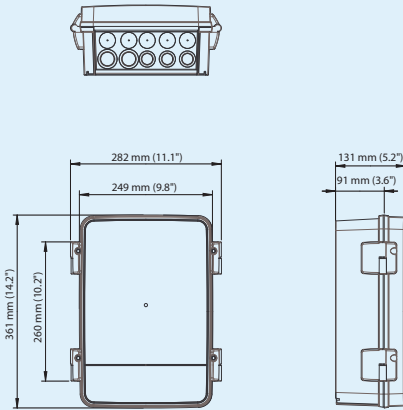

Cabinet inner dimensions

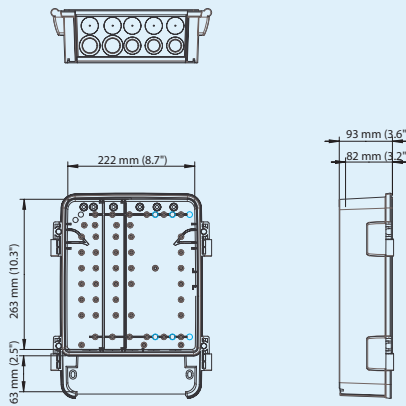

AXIS T98A-VE Mounting Plate

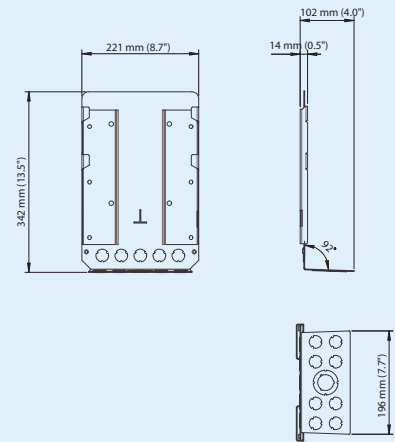

## Optional accessories

AXIS T98A Sunshiled



AXIS Door Switch A



AXIS Electrical Safety kits



AXIS T95A67 Pole bracket



AXIS T95A64 Corner bracket



## Camera accessories

AXIS T8604/T8605  
Media Converter Switches



AXIS T8006 PS12



AXIS T8008 PS12



AXIS T81B22 DC 30 W  
Midspan



AXIS T8123 High PoE 30 W  
Midspan angled connector



AXIS T8124 High PoE 60 W  
Midspan angled connector



## Technical Specifications – AXIS Electrical Safety kits A 120 V AC / B 230 V AC

General		Weight
<b>Model</b>	AXIS Electrical safety kit A 120 V AC AXIS Electrical safety kit B 230 V AC	390 g (0.9 lb.) Door switch: 10 g (0.02 lb.)
<b>Operating conditions</b>	MCB fuse: -40 °C to 75 °C (-40 °F to 167 °F) Surge protector: -40 °C to 80 °C (-40 °F to 176 °F) Terminal block 4X2.5MM2 (L), Terminal block 4X2.5MM2 (GND), Terminal block 2X6MM2 (GND), Door switch: -40 °C to 85 °C (-40 °F to 185 °F)	<b>Dimensions (D x W x H)</b> MCB fuse: 92 x 17.5 x 72 mm (3.6" x 0.7" x 2.9") Surge protector: 85 x 35 x 65 mm (3.3" x 1.4" x 2.6") Terminal block 4X2.5MM2 (L): 80 x 6 x 37 mm (3.1" x 0.2" x 1.5") Terminal block 4X2.5MM2 (GND): 80 x 6 x 37 mm (3.1" x 0.2" x 1.5") Terminal block 2X6MM2 (GND): 67 x 8 x 37 mm (2.6" x 0.3" x 1.5") Door switch: 41 x 10 x 30 mm (1.6" x 0.4" x 1.2") Door switch cable: 1000 mm (40") Screw: 30 mm (1.2")
<b>Approval</b>	MCB fuse: IEC/EN 60947-2, UL 489, CSA 22.2 No. 5 Surge protector: IEC 61 643-1 Ed2, UL 1449 Ed3 Door switch: EN 61058, UL 1054	<b>Included components</b> MCB fuse, surge protector class 2, terminal block 4X2.5MM2 (L), terminal block 4X2.5MM2 (GND), terminal block 2X6MM2 (GND), door switch, door switch cable, screw

More information is available at [www.axis.com](http://www.axis.com)



AXIS T98A15-VE  
Surveillance Cabinet



AXIS T98A16-VE  
Surveillance Cabinet



AXIS T98A17-VE  
Surveillance Cabinet



AXIS T98A18-VE  
Surveillance Cabinet



More information is available at:  
[www.axis.com/products/cam\\_housing/t98ae/](http://www.axis.com/products/cam_housing/t98ae/)