

# ARD-FPBEPxx-OC - BioEntry Plus with card reader / Americas

www.boschsecurity.com



**BOSCH**  
Invented for life



- ▶ Ethernet interface for TCP/IP communication
- ▶ Optional standalone user management
- ▶ Multi color LED
- ▶ Different authentication modes (fingerprint and/or card)
- ▶ Proximity cards

This is a slim-design fingerprint reader for installation on door frames. It is compatible with a full range of access-control applications, from a simple standalone door control to complex, networked access-control systems.

#### Approvals

- Europe: CE
- Americas: FCC

#### Functions

Authentication can be granted by reading fingerprints, cards or a combination of the two.

#### Access control functions:

- 128 access groups
- 128 time schedules
- Anti-passback door zones supporting 32 readers
- Tamper switch and duress finger option

#### Installation/Configuration Notes

##### Product compatibility:

The product is compatible with the following access controllers:

- AEC 2.1


- AMC2-4W
- D9210C

#### Required software:

- BioStar Express Setup utility
- Reader firmware 1.51\_120323 for compatibility with the controllers listed

#### Secure configuration example:

Combined with an access controller (e.g. AMC2 4W) a secure door control can be built as illustrated below.

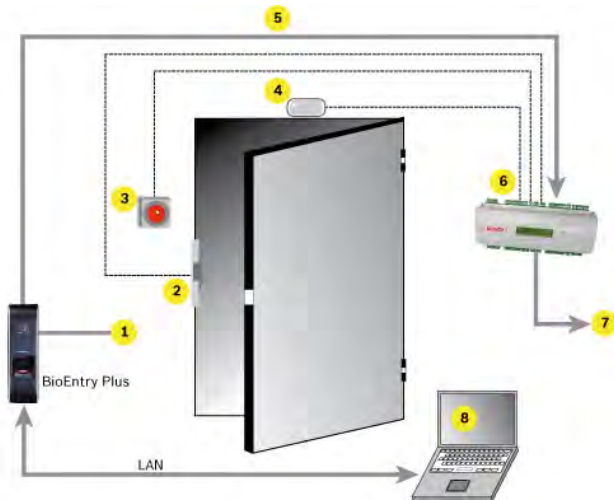

1 = Power supply; 2 = Door lock; 3 = Exit button;  
 4 = Door sensor; 5 = Wiegand secure communication;  
 6 = AMC2 4W; 7 = Access control system;  
 8 = PC with Bio Application via LAN

#### ARD-FPBEPHP-OC - with HID Prox card reader

IP based fingerprint access control for indoor installation with fingerprint and/or card (HID Prox) identification.

Order number **ARD-FPBEPHP-OC**

#### ARD-FPBEPMF-OC - with MIFARE card reader

IP based fingerprint access control for indoor installation with fingerprint and/or card (MIFARE) identification.

Order number **ARD-FPBEPMF-OC**

#### ARD-FPBEPIC-OC - BioEntry Plus with card reader / for Americas

IP based fingerprint access control for indoor installation with fingerprint and/or card (iCLASS) identification.

Order number **ARD-FPBEPIC-OC**

### Technical Specifications

CPU	400 MHz DSP
Memory	4 MB flash + 8 MB RAM
Fingerprint sensor	500 dpi optical sensor
Identification speed	2,000 matches in 1 second
Fingerprint capacity	10,000 templates (5,000 users)
Log capacity	50,000 events
RF card	Proximity (125 kHz EM)
Operation modes	Fingerprint RF card RF card + fingerprint
Network interface	TCP/IP, RS485
Wiegand output	Configurable up to 64 bits
TTL I/O	2 inputs for exit switch and door sensor
Internal relay	Deadbolt, EM lock, door strike, automatic door
Sound and interface	Multi-color LED and multi-tone buzzer
Operating voltage	12 Vdc
Size (W x H x D)	50 x 160 x 37 mm

### Ordering Information

#### ARD-FPBEP-OC - with EM card reader

IP based fingerprint access control for indoor installation with fingerprint and/or card (EM Prox) identification.

Order number **ARD-FPBEP-OC**

**Represented by:**

**Americas:**

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security  
Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

**China:**

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

**America Latina:**

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
al.securitysystems@bosch.com  
www.boschsecurity.com