

MODEL 600 RESIDENTIAL / COMMERCIAL OPERATOR




BYAN SYSTEMS, Inc.

Automatic Gate and Access
Control Products

NO PHYSICAL STOPS NEEDED ADJUSTABLE REAR MOUNTING BRACKET

(With This New Bracket It Makes Our Operator As Easy To Install As One Needing Physical Stops)

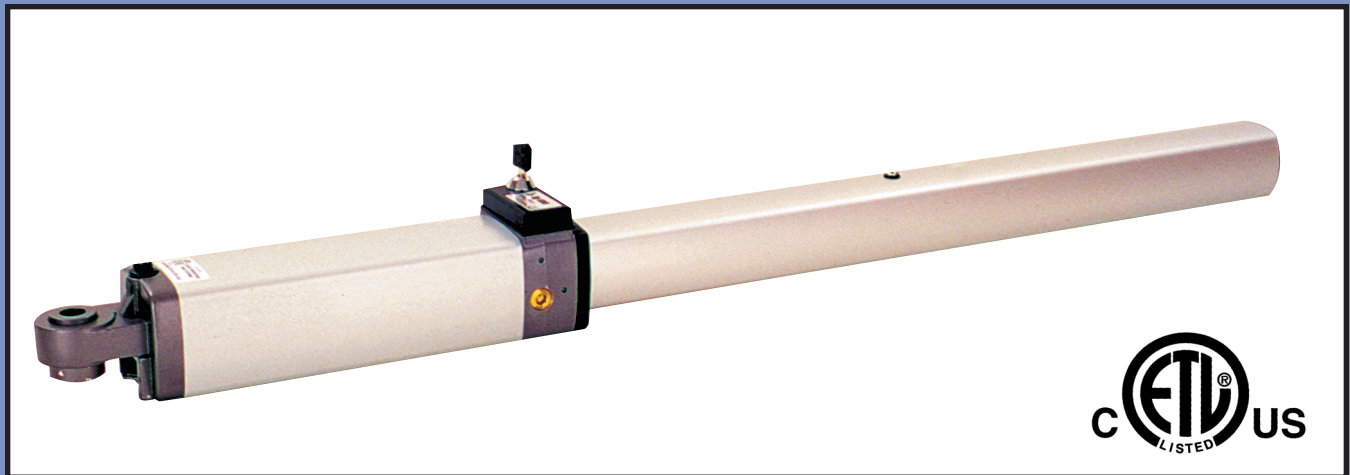

ELIMINATOR SERIES

AUTOMATICALLY SLOWS DOWN THE LAST FIVE DEGREES
NO NEED FOR PHYSICAL STOPS
HAS HYDRAULIC LOCKS IN BOTH DIRECTIONS

1-800-223-2926
www.byan.com

MODEL 600 RESIDENTIAL / COMMERCIAL OPERATOR

SPECS

MOTOR	1/6 HP
HYDRAULIC PUMP	SPUR GEAR
POWER SUPPLY	115V/220V(220V EXTRA CHARGE)
AMP DRAW	4 AMPS
TEMPERATURE RANGE	-60F TO 240F
OVERALL LENGTH OF OPERATOR	42 INCHES
PISTON TRAVEL	9.84 INCHES
WIDTH/HEIGHT MAXIMUM	4.33 INCHES
MAXIMUM SPEED 90 DEGREES	APPROX. 12 SEC.
MAXIMUM GATE OPENING	120 DEGREES
LENGTH OF GATE	16 FEET
WEIGHT OF GATE LEAF	2000 LBS.
DUTY CYCLE (OPEN/CLOSE)	100 PER HOUR

OPERATING SPEED CAN BE ADJUSTED AT THE FACTORY FOR AN EXTRA COST. NORMAL SPEED APPROX. 12 SEC. CAN BE CHANGED UP TO 20 SEC. CONTACT FACTORY FOR ADVICE ON CHANGING SPEED.

