


IKALL SERIES SIMPLEBUS SYSTEM COLOUR AUDIO/VIDEO UNIT

Simplebus Color system audio/video unit with terminal block complete with front-adjustable wide-angle 1/4' colour camera and LED camera illumination. Complete with terminal block and digital audio management system with Eco-cancelling, watertight loudspeaker and electrets microphone; loudspeaker volume canbe adjusted from the front. Complete with microprocessor and DIPSWITCH with 8 positions for programming calls to users. Audiovisualindications for disabled individuals assistance request canbe activated via programming. 33Vdc power supply via special power supply unit Art. 1595. On-board electronic lock-release function (3A), plus C, NC, NO contacts for 10A relay. For use in modules Art. 33410, 33411 and 33412. Dimensions: 102x55x38 mm. Compatible with all SBTOP functions and products. Allows call addressing for up to 120000 users. Timed lock-release input and door open indication.

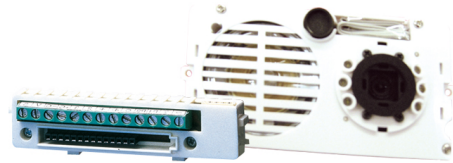

General specifications

Product height (mm):	55
Product width (mm):	104
Product depth (mm):	35

Packaging

Single pack width (mm):	110
Single pack height (mm):	53
Single pack depth (mm):	94
Single pack weight (g):	250

Electrical specifications

AC supply voltage:	33 V
DC supply voltage:	33 V
Maximum current absorption (mA):	400
Signal/noise ratio (dB):	48

Connectivity

Video output (Vpp/Ohm):	1 / 75 PAL
-------------------------	------------

Hardware specifications

DDE function	
Camera pixels:	500x582

Technical properties

Angle of view on 3 axes (°):	D:86,30
Minimum distance from lens (cm):	30

DATA SHEET

Temperature range: -25 / 55 C

Sensitivity (lux): 1

Audio/video system

Type of camera: COLOR

Type of sensor: CCD 1/4

Control functions

Horizontal resolution (TVL): 350

Settings

Loudspeaker volume control

Microphone volume control

General functions

Key button function

S/N ratio dB: 48



 800.955.5201

Email: sales@Surveillance-Video.com