


TECH SHEET

Door entry monitor EX-7000HW



The EX-7000HW is the expansion video Wi-Fi door entry monitor for **HFX-700B, HFX-9500M, HFX-7000M, HFX-9000M** Kits.



EX-7000HW


MINI HANDSFREE WI-FI DOOR ENTRY MONITOR



- *Wi-Fi Technology*
- *Compatible with COMELIT App available on the App Store and Google Play*
- *Receive and answer calls from video door entry on smartphone/tablet*
- **Compatible with voice assistants**
- **Receive and answer calls from video door entry on Alexa/Ecoshow/Google**
- **“Face recognition” function**
- *P2P Technology - No need for port forwarding*
- *Connection between smartphone and monitor in a few easy steps*
- *Wall-mounted hands-free door entry monitor*
- *Color door entry monitor with 4.3" 16:9 Wide-Screen*
- *8 sensitive touch back-lit controls for audio activation/paging call, door-opening, actuator, self activation, silent mode and LEDs signalling for the door status and silent mode.*
- *Manages floor door call*
- *Complete with 2 x 8-position DIP-switches for user code programming and button programming*
- *The surface mount backplate is included*


By installing and configuring the COMELIT app on smartphone / tablet it is possible to answer video door entry calls from a local and remote network (or mobile network), it is possible to make self activation on cameras/entrance panels and send commands to actuator modules.

The **Smart Registration manual** will help during the first installation of Comelit app on smartphone/tablet. Smart Registration manual and **Comelit App manual** are available to download from the website pro.comelitgroup.com

MAXIMUM EXPANSION INTERNAL UNITS FOR KITS

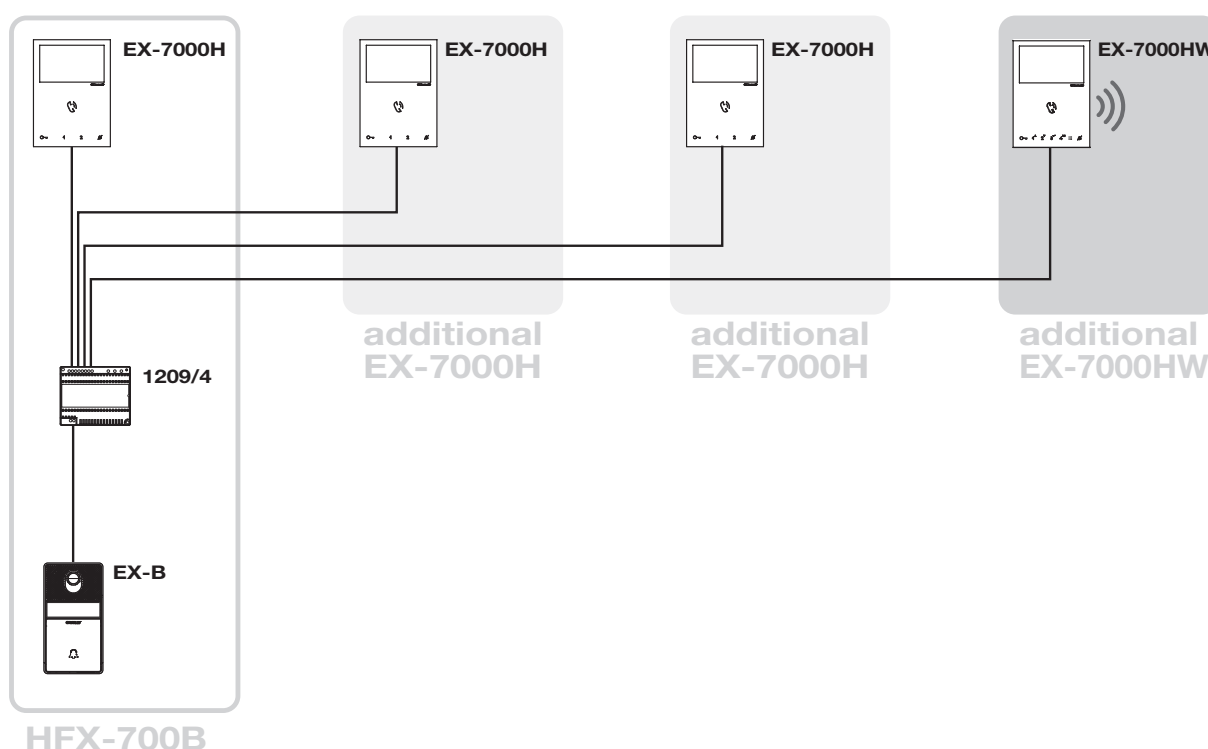

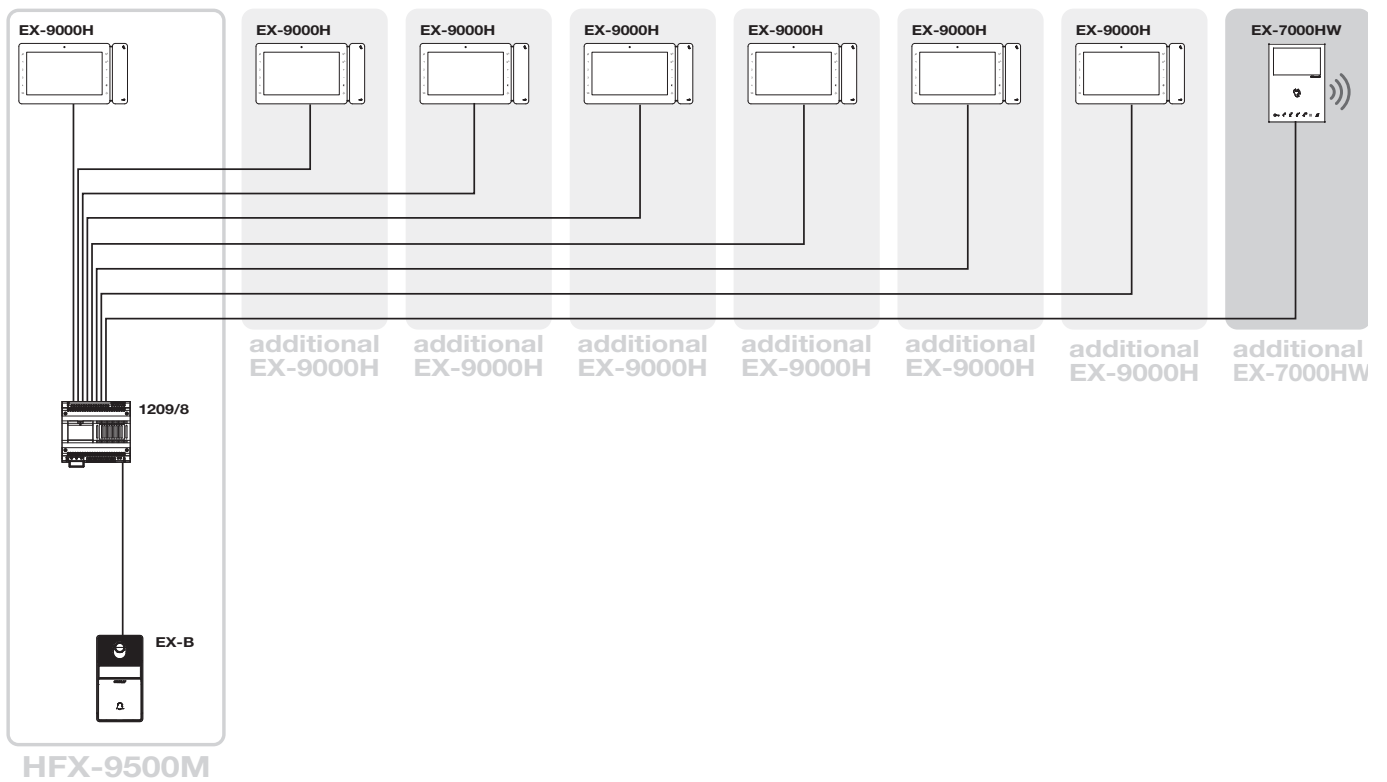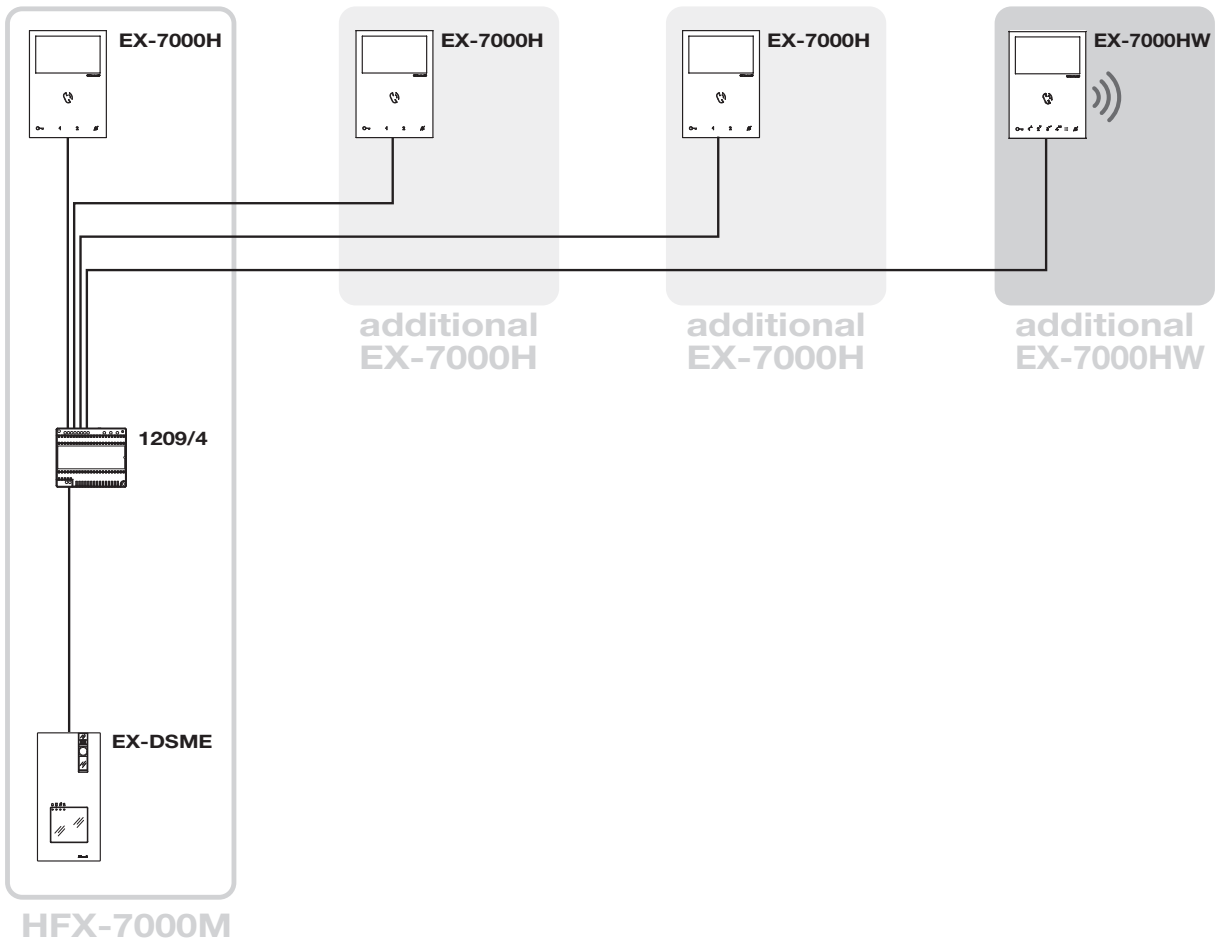


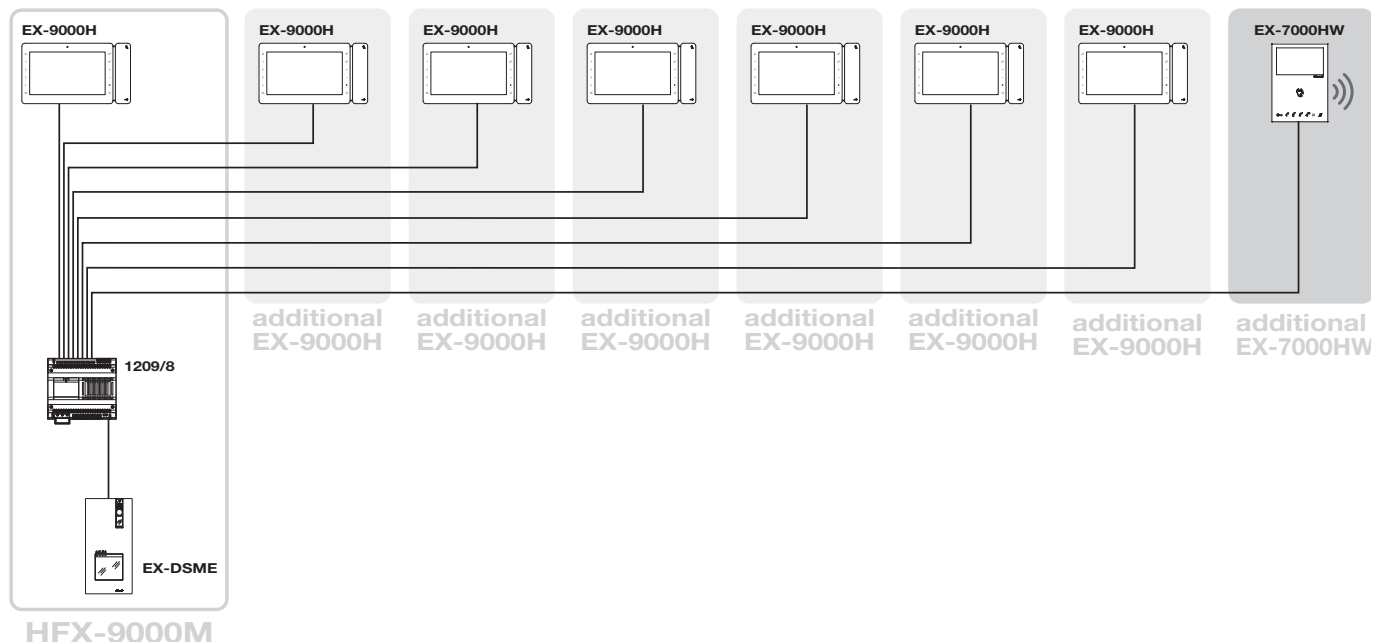

SPECIFICATIONS ART. EX-7000HW

DIMENSIONS (WITH BRACKET)	
Width	4.52 in
Height	6.29 in
Depth	0.83 in
Weight	21 oz
MAIN FEATURES	
B/W or color display	color
Type of display	LCD
Display size (inches)	4.3"
Display resolution (H x V)	480 x 272 pixel
LCD Ratio	16:9 Wide-screen Format
OSD display	Yes
Backlighting colour	White
Wi-Fi technology	Yes
Compatible with <i>Comelit</i> app	Yes
HARDWARE CHARACTERISTICS	
Buttons	8
LED indication (n)	4
Backplate supplied	Yes
Removable terminals	Yes
ENVIROMENTAL	
Operating temperature	Class B1 normal range indoor 41° F /104° F (5°C / 40°C)
IP rating	30
TECHNICAL CHARACTERISTICS	
Power supply voltage	22-34 Vdc
Absorption in standby (mA)	45-70
Absorption during call (mA)	150-180
Absorption during communication (mA)	250-300
Network connection	WLAN
Video encoding	PAL/NTSC
OTHER INFO	
	Sensitive Touch technology Surface mounted only
ADJUSTMENTS	
Loudspeaker volume	Yes
Brightness	Yes
FUNCTIONS	
	Lock-release key function Silent mode (Privacy) Floor door call function Actuator control function Privacy conversation function Intercom function (Auto Timer intercom= 300 sec) Paging function Self activation Full Duplex hands-free function Automatic answer mode Display brightness control Loudspeaker volume control Ringtone volume control Customizable ringtone

UNIT DIMENSIONS

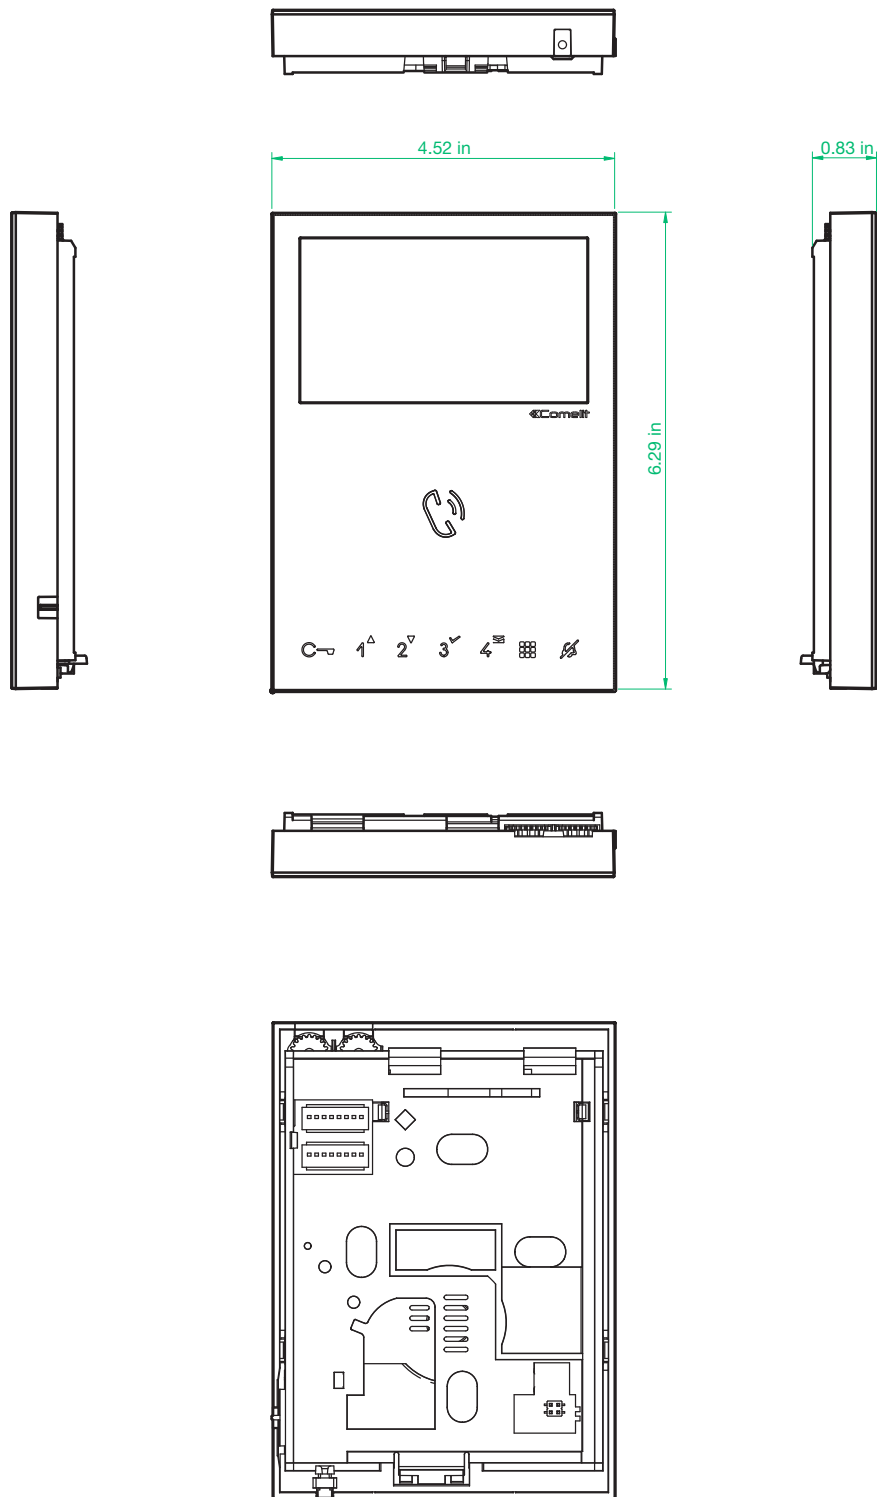

CERTIFIED MANAGEMENT SYSTEMS



www.comelitgroup.com

Via Don Arrigoni, 5 - 24020 Rovetta (BG) - Italy



8 023903 444346

2nd edition - 09/2022
cod. 2G40003011