


TECH SHEET

Expansion Door entry monitor - EX-7000H



The **EX-7000H** is the Additional Internal Unit for Single-User Kits **HFX-700B**, **HFX-700W**, **HFX-7000M**, **HFX-7000MW**






EX-7000H


COLOR HANDS-FREE DOOR ENTRY MONITOR

- Wall-mounted hands-free door entry monitor
- Full-duplex audio
- Color door entry monitor with 4.3" 16:9 Wide-Screen
- Brightness adjustment
- Ringtone volume control
- Customizable ringtones
- 5 sensitive touch back-lit controls for audio activation/paging call, door-opening, actuator, self activation, silent mode and LEDs signalling for the door status and silent mode.
- Manages floor door call.
- Complete with 2 x 8-position DIP-switches for user code programming and button programming.
- The surface mount backplate is included.

MAXIMUM EXPANSION INTERNAL UNITS FOR KITS

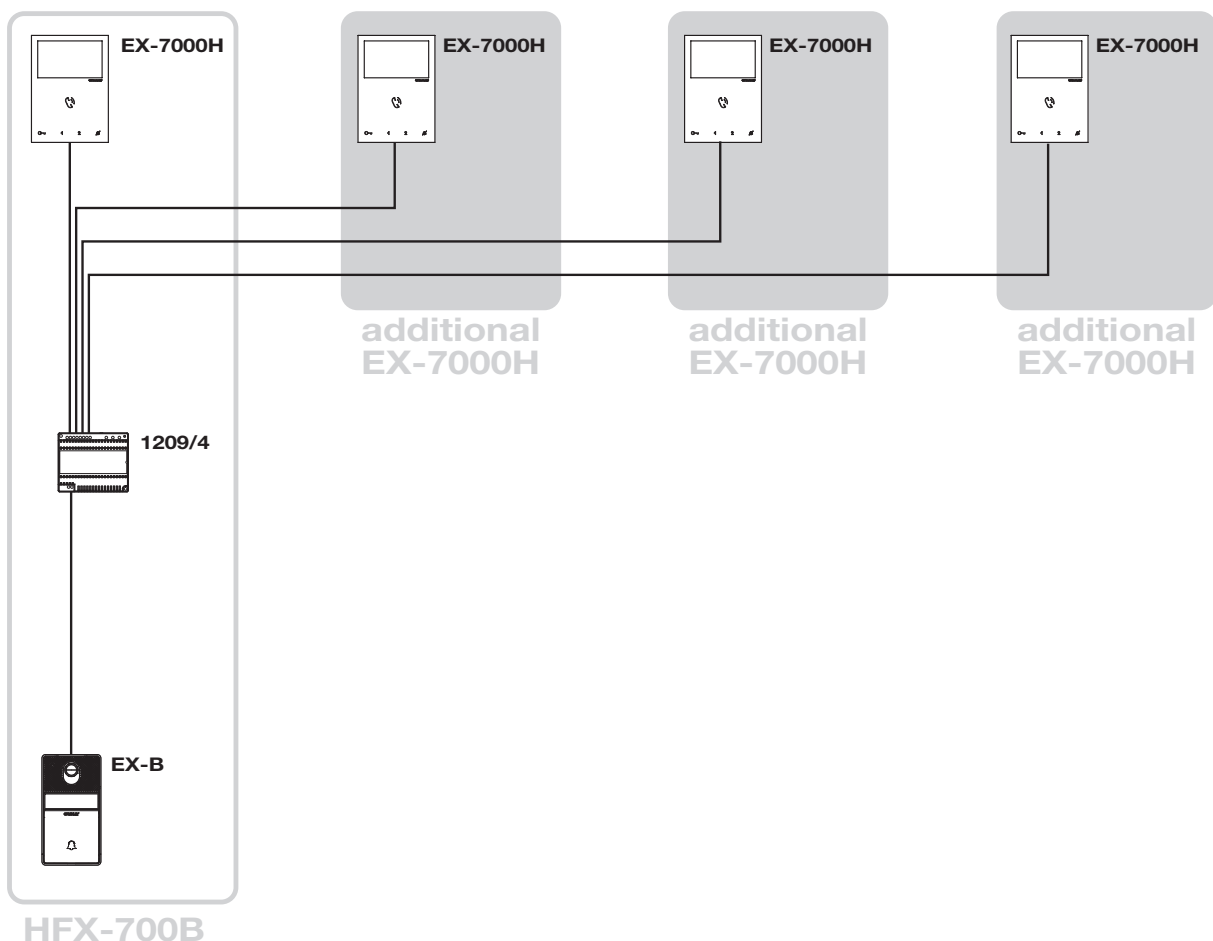

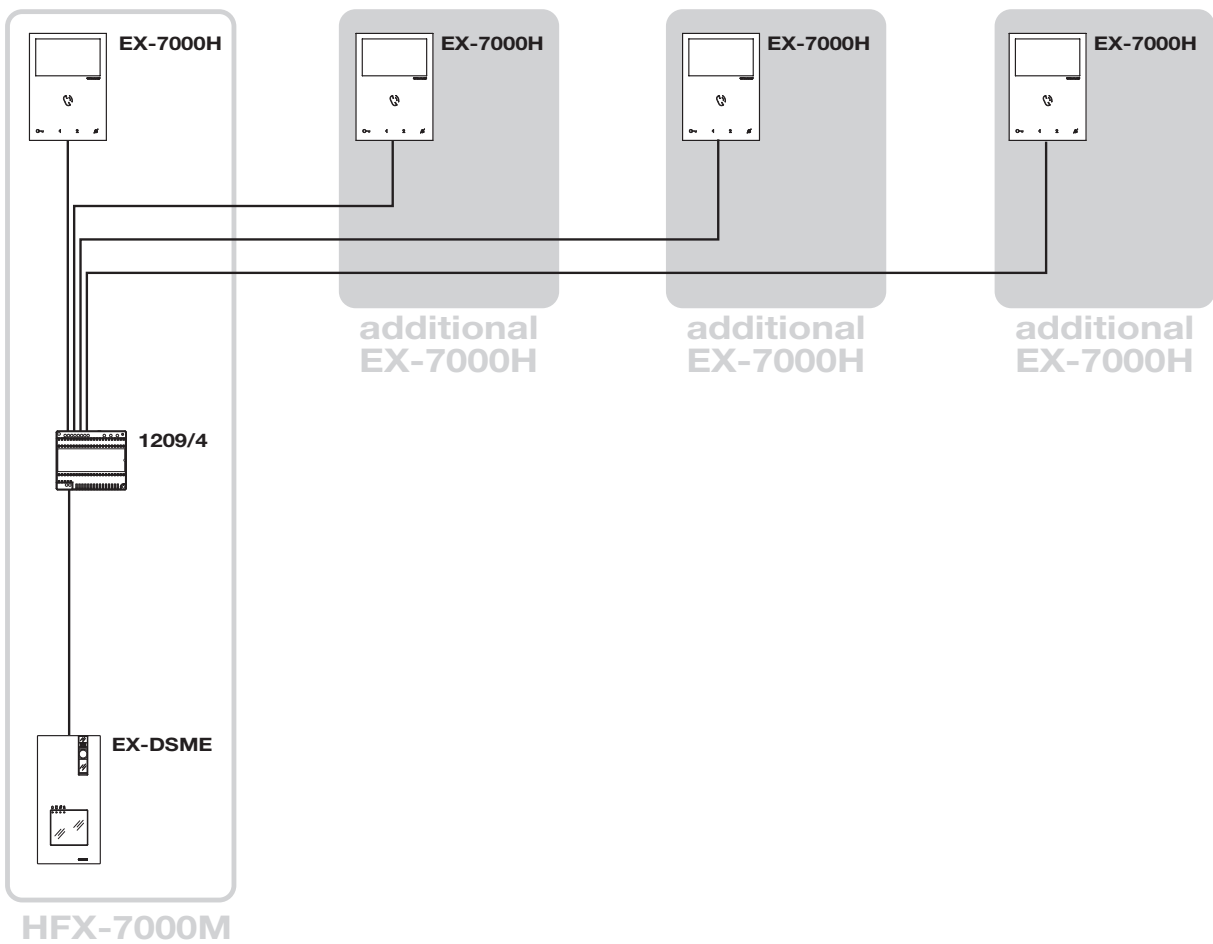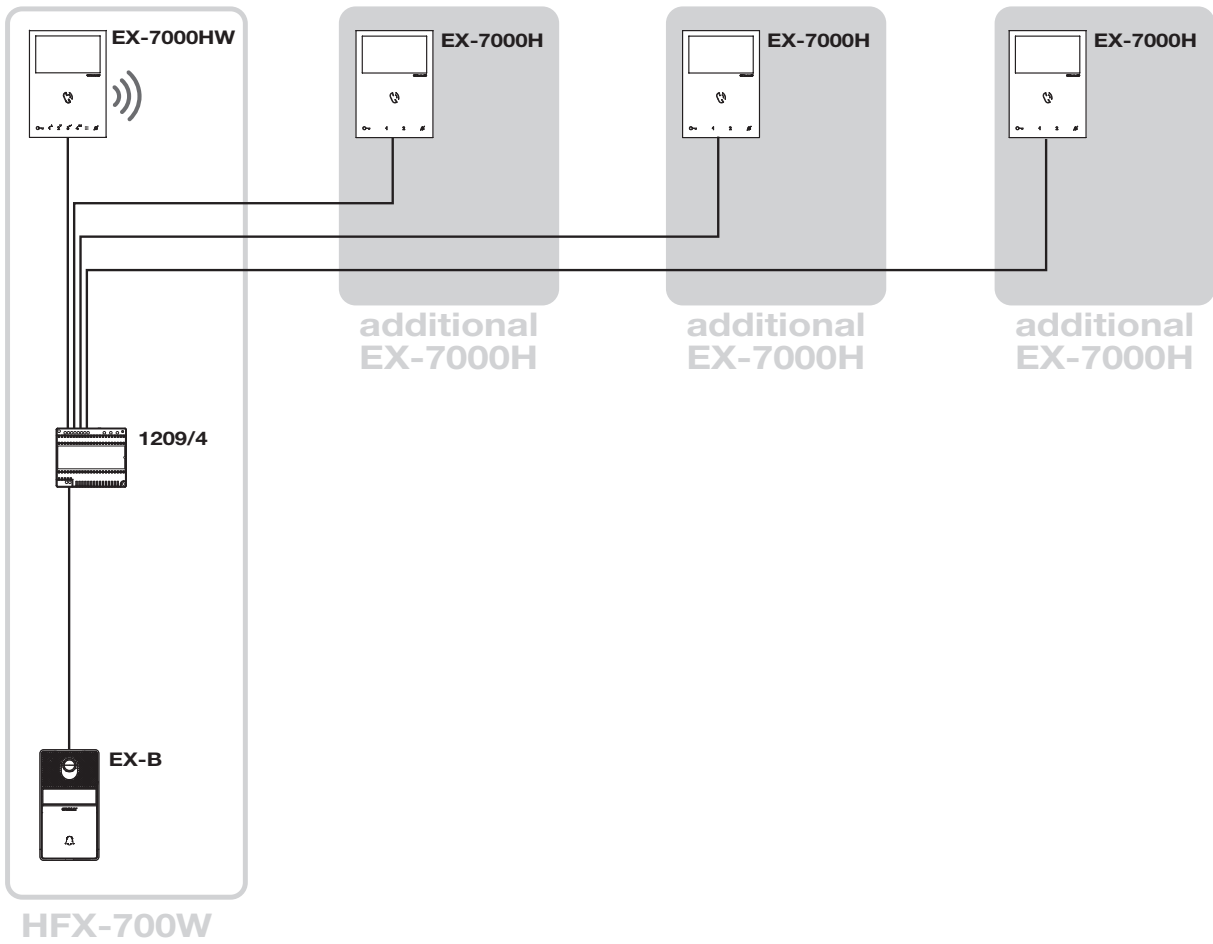


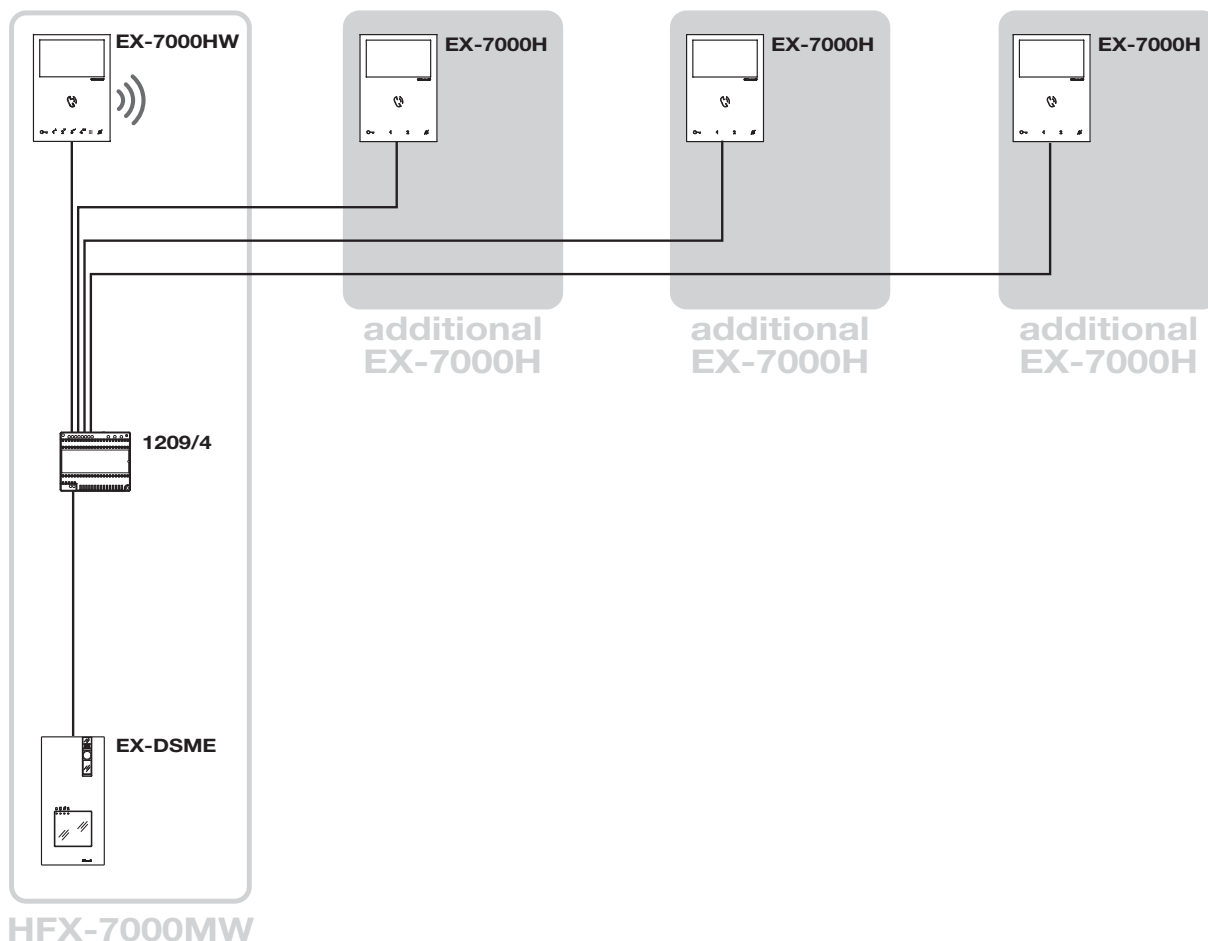

SPECIFICATIONS ART. EX-7000H

| DIMENSIONS (WITH BRACKET) | |
|---------------------------------|---------------------------------------------------------|
| Width | 4.52 in |
| Height | 6.29 in |
| Depth | 0.83 in |
| Weight | 21 oz |
| HARDWARE | |
| Removable terminals | Yes |
| Buttons | 5 |
| Display size (inches) | 4.3" |
| B/W or color display | COLOR |
| Display resolution (H x V) | 480x272 pixel |
| Type of display | LCD |
| LCD Ratio | 16:9 Wide-screen Format |
| ENVIROMENTAL | |
| Operating Temperature | Class B1 normal range indoor 41° F /104° F (5°C / 40°C) |
| ELECTRICAL SPECIFICATIONS | |
| Maximum current absorption (mA) | 240 |
| Power consumption | 10 W MAX |
| OTHER INFO | |
| | Sensitive Touch technology |
| | Surface mounted only |
| FUNCTIONS | |
| | Lock-release key function |
| | Silent mode (Privacy) |
| | Floor door call function |
| | Actuator control function |
| | Privacy conversation function |
| | Intercom function (Auto Timer intercom= 300 sec) |
| | Paging function |
| | Self activation |
| | Full Duplex hands-free function |
| | Automatic answer mode |
| | Display brightness control |
| | Loudspeaker volume control |
| | Ringtone volume control |
| | Customizable ringtone |

UNIT DIMENSIONS

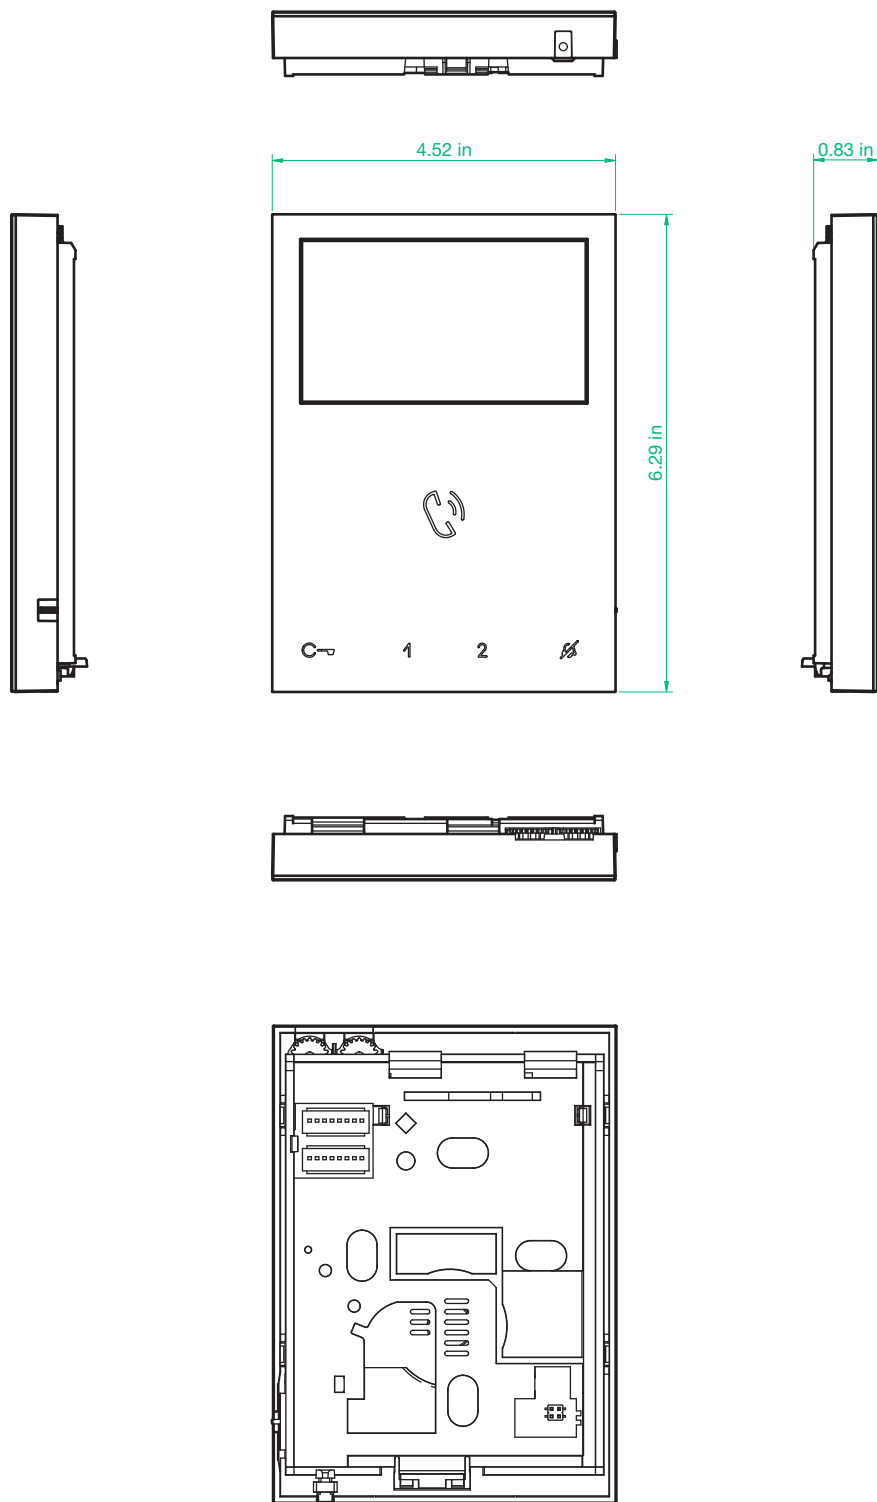

CERTIFIED MANAGEMENT SYSTEMS



www.comelitgroup.com

Via Don Arrigoni, 5 - 24020 Rovetta (BG) - Italy



8 023903 444322

2nd edition - 09/2022
cod. 2G40003009