


DATA SHEET

COD. **SK9000I**

SIMPLEKEY BASIC READER IKALL

Unit complete with SimpleKey Basic access control device, Independent control unit module + integrated Mifare(R) reader. Airtight PVC case. Capacity: 1500 keys. Programming via single master card. The system is activated when the first card is passed in front of the unit which has not yet been used. It is converted into a master card, to which others may be added. Relay closure can be adjusted by a timer: between 1 and 60 seconds, default 5 seconds. To delete a key, use the SK9093 software. Power supply unit 12-24 V AC/DC or 33V DC.

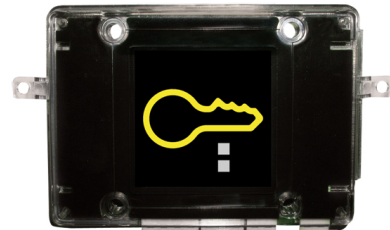

General info

EAN product code:	8,0239E+12
Intrastat code:	85171800

Compatibility

Access Control Family:	Yes
Simplebus Top system:	Yes

Packaging

Single pack weight (Kg):	0,22
--------------------------	------