


SIMPLEKEY ADVANCED READER IKALL

Simplekey Advanced access control unit, complete with Mifare proximity reader + control unit. Hermetic PVC case to be fitted to various entrance panels. Capacity:1500 keys. System programming through USB Encoder and Simplekey Advanced SK9091 software. LED for system status indication. Recording of the previous 1,400 events. Option to create complex building systems without the need for a physical connection. Relay closing timer: from 1 to 60 seconds, 5 second default. 12-24 V DC/AC or 33V DC power supply unit from part. 1595.

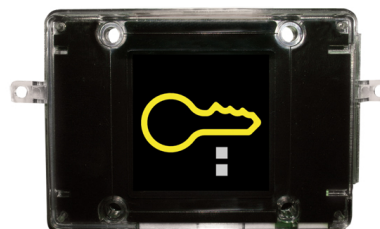

General info

Intrastat code: 85171800

Compatibility

Access Control Family: Yes

Connectivity

Alarm inputs/outputs: 1

USB 2.0 ports: Yes

Packaging

Single pack height (mm): 77

Single pack width (mm): 75

Single pack weight (Kg): 0,003

Single pack depth (mm): 130

Single pack volume (dm3): 0,75