


SIMPLEKEY ADVANCED SINGLE-DOOR CONTROL UNIT

Single-door control unit for use with Mifare® readers. Capacity: 1500 badges per module. Programming: Transmitters encoded using PC software and USB encoder. Adjustable timer: 1 - 60 seconds, preset to 5 seconds. LED indicator for operation and diagnostics. Stores the previous 1000 events. Option to have ?pass? badges and to manage primary and secondary doors. 1 entrance and 1 exit alarm. 12 - 24 V AC / DC power supply. PVC housing dimensions: 2.2?x3.3?x0.8?. To be completed with remote readers SK9030/SK9031/SK9032.

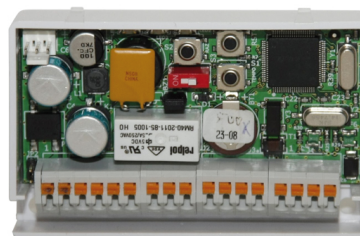

General info

EAN product code:	8,0239E+12
Intrastat code:	85171800

Compatibility

Access Control Family:	Yes
------------------------	-----

Packaging

Single pack height (mm):	77
Single pack width (mm):	75
Single pack weight (Kg):	0,19
Single pack depth (mm):	130
Single pack volume (dm3):	0,75