


# DATA SHEET

COD. **SK9030I**

## PANEL MOUNT READER

Mifare® reader to insert into Comelit housing. Watertight PVC housing. 2 operation LEDs. Connected to management unit by 2 wires + power supply. Maximum range 1000 m. Wiegand output for use with non-Comelit management modules. 12Vdc power supply. Dimensions: 2.5"x4.3"x0.9". To be completed with SK9020 control unit.

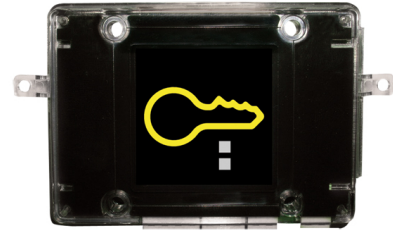

### General info

EAN product code:	8,0239E+12
Intrastat code:	85171800

### Packaging

Single pack weight (Kg):	0,169
--------------------------	-------