

ASC1204C-D

Four Door Two Way Access Controller



Features

- Support 100,000 valid cards & 150,000 records
- Support multiple cards
- Support card, password, fingerprint and combination
- TCP/IP interface to PC
- Wiegand or RS-485 interface to readers
- Door time out alarm, intrusion alarm, duress alarm and tamper alarm
- Anti-pass back, multi-door interlock, multi-card open
- Support 128 efficient time and holiday schedules
- Watch dog function ensure device free from halting
- Surface mounted installation
- Accumulator battery extension

Technical Specification

System

Main Processor 32 Bit

Memory 16M

Input/Output Ports

Input Inputs x 20 (Lock state x 4, Door sensor x 4, Exit button x 4, Alarm x 8)

Output Relay x 12(door lock x 4, Inner alarm x 4, External alarm x 4)

Reader Reader x 8

Capacity

Card holders 100,000

Events 150,000

Function

Control Mode Four door two way

Access control Anti-pass back, Multi-interlock, Multi-card unlock

User Management General, VIP, Guest, Patrol, Black list, Duress

Alarm Function Door time out alarm, Intrusion alarm, Duress alarm, Tamper alarm

Period Support 128 groups of schedule, 128 groups of period and 128 groups of holiday period

Interface

To PC RJ45(10/100M)

To Reader Wiegand 26/34, RS485

General

RTC Yes

Power Supply AC85~264V


Working Environment -30°C~+60°C

Working Humidity ≤95%

Dimension(WxDxH) 280*320*114mm

Weight 2kg

Dimensions

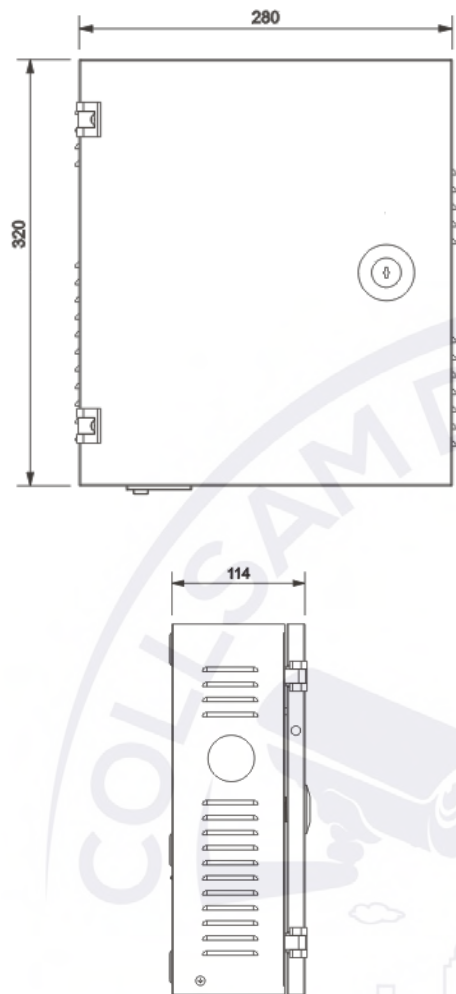

Application

Multi-door Management
Four door two way controller

