

# 16-channel 4K ePoE Network Video Recorder

1U Smart H.265+ Network Video Recorder with Analytics+



## Wiz Sense

WizSense Series devices combine Dahua's powerful Analytics+ with an intuitive and easy to use interface. WizSense devices offer Smart Motion Detection and Perimeter Protection functions that focus on human and vehicular images and ignore irrelevant images to capture important video while reducing false alarms. WizSense Series devices provide powerful general surveillance for small to medium size businesses at a sensible price.

### System Overview

The Dahua DHI-NVR4216-16P-I combines Analytics+ algorithms with Dahua's ePoE technology into an all-in-one network video recorder. This NVR uses a powerful multi-core processor to provide 4K resolution processing for applications where impeccable image details are required. In addition, the NVR can be employed as edge storage, central storage, or backup storage with an intuitive shortcut operation menu for remote management and control. The DHI-NVR4216-16P-I is ideal for applications that require entrance/exit management, where knowing who is coming and going is a valuable asset.

### Functions

#### Perimeter Protection

Dahua Analytics+ includes Tripwire and Intrusion functions that offer custom tripwires based on object type for automation in limited access areas. Perimeter Protection requires less pixels to detect an object to deliver improved accuracy and decreased false alarms due to lights, weather, trees, or animals.

#### Real-time Face Recognition

Analytics+ performs real-time facial recognition on up to two (2) streaming video channels simultaneously. The server captures and analyzes facial features to determine gender, age, expression, glasses, moustache, and mask, and then can record the faces and store the associated structured data. The server also filters incoming video to display faces that match target features.

- Maximum 200 Mbps Incoming Bandwidth
- Available with a 2 TB, 4 TB, 6 TB, or 8 TB Pre-installed Hard Drive
- 16 IP Channel Video Access
- Smart H.265+ and Smart H.264+ Video Compression
- Perimeter Protection with 10 Rule Definitions per Channel (up to 4 channels)
- Video Stream Face Recognition (up to 2 channels)
- Processes 12 Facial Images per Second
- Facial Database Management, Stores up to 20,000 Faces
- Stranger Mode to Detect Faces not Stored in Database
- 16 PoE Ports, Ports 1 to 8 Support ePoE and EoC Signal Transmission up to 800 m (2625 ft)
- Five-year Warranty\*



#### Stranger Mode

The NVR supports two facial detection modes: Common and Stranger. In Stranger mode, when the NVR detects a face not stored in the device's database, it can trigger an alarm, a buzzer, take a snapshot, or initiate recording. It also incorporates a Similarity Threshold, where the server triggers an alarm for a face that does not match a minimum recognition level. The Stranger Mode and the Similarity Threshold are designed for critical infrastructure sites where access control is of vital importance.

#### Efficient Search

The NVR searches images by facial features to improve search efficiency. The server support uploading and storing 20,000 facial images for comparison with recorded faces. This search capability allows operators to quickly and easily search multiple channel recordings to determine when and where a person of interest appeared in a recording.

#### Face Database Management

In addition to the 20,000 facial images, the NVR database also stores names, genders, birthdays, nationality, address, and ID information associated with each facial image. The NVR also offers powerful and configurable database management features that can be applied to each face recognition channel independently.

#### Smart H.265+

Smart H.265+ is the optimized implementation of the H.265 codec that uses a scene-adaptive encoding strategy, dynamic GOP, dynamic ROI, flexible multi-frame reference structure and intelligent noise reduction to deliver high-quality video without straining the network. Smart H.265+ technology reduces bit rate and storage requirements by up to 90% when compared to the H.264 video compression standard.

## Technical Specification

### System

|                  |                               |
|------------------|-------------------------------|
| Main Processor   | Multi-core Embedded Processor |
| Operating System | Embedded LINUX                |

### Analytics+ Perimeter Protection<sup>1,2</sup>

|                       |                                                                                                                              |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------|
| Performance           | <ul style="list-style-type: none"> <li>Four (4) channels</li> <li>10 Tripwire/Intrusion rules per channel</li> </ul>         |
| Object Classification | <ul style="list-style-type: none"> <li>Human or Vehicle</li> <li>Secondary Recognition for Tripwire and Intrusion</li> </ul> |
| Search                | <ul style="list-style-type: none"> <li>Search by object classification (human or vehicle)</li> </ul>                         |

### Analytics+ Face Recognition<sup>1,2</sup>

|                      |                                                                                                                                                                                                            |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Performance          | <ul style="list-style-type: none"> <li>Process 12 facial images per second</li> <li>Up to two (2) channels of video stream face recognition</li> </ul>                                                     |
| Stranger Mode        | <ul style="list-style-type: none"> <li>Detects a face not stored in the IVSS database.</li> <li>Similarity Threshold set manually.</li> </ul>                                                              |
| Search by Image      | <ul style="list-style-type: none"> <li>Up to eight (8) target face image searches simultaneously.</li> <li>Supports Similarity Threshold for each target face image.</li> </ul>                            |
| Database Management  | <ul style="list-style-type: none"> <li>10 Face Databases</li> <li>20,000 total face images.</li> <li>Stores name, gender, birthday, nationality, address, ID information for each face picture.</li> </ul> |
| Database Application | Each database can be applied to video channels independently.                                                                                                                                              |
| Trigger Events       | Buzzer, Voice Prompts, Email, Snapshot, Recording, Alarm Out, PTZ Activation                                                                                                                               |

### Audio and Video

|                 |                                                         |
|-----------------|---------------------------------------------------------|
| IP Camera Input | 16 Channels                                             |
| Audio           | Input: One (1) Channel, RCA<br>Output: (1) Channel, RCA |

### Display

|                          |                                                                             |
|--------------------------|-----------------------------------------------------------------------------|
| Interface                | One (1) HDMI Output<br>One (1) VGA Output                                   |
| Native Output Resolution | HDMI<br>3840 x 2160, 1920 x 1080, 1280 x 1024, 1280 x 720<br>1024 x 768     |
|                          | VGA<br>1920 x 1080, 1280 x 1024, 1280 x 720, 1024 x 768                     |
| Maximum Decoding         | Two (2) Channels of 8 MP at 30 fps<br>Eight (8) Channels of 1080p at 30 fps |
| Multi-screen Display     | 1, 4, 8, 9, 16                                                              |

### Recording

|                                |                                                                                             |
|--------------------------------|---------------------------------------------------------------------------------------------|
| Compression                    | Smart H.265+, H.265, Smart H.264+, H.264, MJPEG                                             |
| Supported IP Camera Resolution | 12 MP, 8 MP, 6 MP, 5 MP, 4 MP, 3 MP, 1080p, 1.3 MP, 720p, D1, CIF                           |
| Maximum Incoming Bandwidth     | 200 Mbps<br>(80 Mbps when Analytics+ functions enabled)                                     |
| Maximum Recording Bandwidth    | 200 Mbps<br>(80 Mbps when Analytics+ functions enabled)                                     |
| Bit Rate                       | 16 Kbps to 20 Mbps per channel                                                              |
| Record Mode                    | Manual, Schedule (Continuous, Motion Detection, Alarm, IVS)                                 |
| Record Interval                | 1 to 120 minutes (default: 60 minutes)<br>Pre-record: 1 to 30 s<br>Post-record: 10 to 300 s |

## Video Detection and Alarm

|                 |                                                                                                 |
|-----------------|-------------------------------------------------------------------------------------------------|
| Trigger Events  | Buzzer, Voice Prompt, Email, Snapshot, Recording, Alarm Out, PTZ Activation, Tour, Alarm Upload |
| Video Detection | Motion Detection, MD Zones: 396 (22 x 18); Video Loss, Tampering, and Scene Change              |
| Alarm Inputs    | Four (4) Channels                                                                               |
| Relay Outputs   | Two (2) Channels                                                                                |

## Playback and Backup

|                   |                                                                                                                                                                       |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sync Playback     | 1, 4, 9, 16                                                                                                                                                           |
| Search Mode       | Time and Date, Alarm, Motion Detection, and Exact Search (accurate to one second)                                                                                     |
| Playback Function | Play, Pause, Stop, Rewind, Fast Play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom |
| Backup Mode       | USB Device, Network                                                                                                                                                   |

## Third-party Support

|                     |                                                                                                                               |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Third-party Support | Arecont Vision, Airlive, AXIS, Canon, Dynacolor, JVC, LG, Panasonic, Pelco, Xunmei, Samsung, Sanyo, Sony, Watchnet, plus more |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------|

## Network

|                          |                                                                                                                                                                                  |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Interface                | One (1) RJ-45 Port (10/100/1000 Mbps)                                                                                                                                            |
| PoE                      | 16 PoE Ports (IEEE802.3af/at)                                                                                                                                                    |
| ePoE and EoC             | Ports 1 through 8                                                                                                                                                                |
| Network Function         | HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, SNMP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Center, IP Search (Support Dahua IP camera, DVR, NVS, etc.), P2P |
| Maximum User Access      | 128 Users                                                                                                                                                                        |
| Mobile Operating Systems | IOS, Android                                                                                                                                                                     |
| Interoperability         | ONVIF Profile S, SDK, CGI                                                                                                                                                        |

## Storage

|              |                                                          |
|--------------|----------------------------------------------------------|
| Internal HDD | Two (2) SATA III Ports, up to 8 TB capacity for each HDD |
|--------------|----------------------------------------------------------|

## Auxiliary Interface

|       |                                                           |
|-------|-----------------------------------------------------------|
| USB   | One (1) USB 2.0 Port, rear<br>One (1) USB 2.0 Port, front |
| RS232 | One (1) Port for PC Communication and Keyboard            |

1. The NVR is capable of processing one (1) Analytics+ function per channel, either Face Recognition or Perimeter Protection.
2. The capabilities of the listed Analytics+ functions pertain to channels assigned to cameras with Analytics functionality, the NVR is capable of the following Analytics+ functions: Face Recognition on eight (8) channels or Perimeter Protection on eight (8) channels.

Electrical

|                   |                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------|
| Power Supply      | Single, 100 VAC to 240 VAC, 50/60 Hz, 3.5 A                                                                         |
| Power Consumption | NVR: < 6.1 W, without HDD                                                                                           |
| PoE Budget        | <ul style="list-style-type: none"> <li>130 W Total Rated Power</li> <li>Maximum 25.5 W for a single port</li> </ul> |

Environmental

|                      |                                                       |
|----------------------|-------------------------------------------------------|
| Operating Conditions | -10° C to +55° C (14° F to 131° F), 86 kpa to 106 kpa |
| Storage Conditions   | -20° C to +70° C (-4° F to 158° F), 0% to 90% RH      |

Construction

|                                 |                                                                       |
|---------------------------------|-----------------------------------------------------------------------|
| Dimensions                      |                                                                       |
| NVR                             | 1U, 375.0 mm x 321.0 mm x 53.80 mm (14.76 in. x 12.64 in. x 2.14 in.) |
| NVR with PFH101 Rack Mount Tray | 482.60 mm x 326.48 mm x 53.80 mm (19.0 in. x 12.85 in. x 2.14 in.)    |
| Net Weight                      | 2.68 kg (5.91 lb), without HDD                                        |
| Gross Weight                    | 4.02 kg (8.86 lb), without HDD                                        |
| Installation                    | Standard 19-in. Rack-mount                                            |

Certifications

|                                     |                                                                                     |
|-------------------------------------|-------------------------------------------------------------------------------------|
| Safety                              | UL 60950-1, EN60950-1, CAN/CSA C22.2 No. 60950-1-07                                 |
| Electromagnetic Compatibility (EMC) | FCC CFR 47 Part 15 Subpart B, ANSI C63.4-2014, EN55035, EN55032, EN55024, EN50130-4 |

Intelligence<sup>3</sup>

IVS triggers an alarm and takes a defined action for the following events:

|                          |                                                                                                                                                                                                                                                                                             |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard Features        | <ul style="list-style-type: none"> <li>Tampering with the camera.</li> <li>Camera loses or changes focus drastically.</li> <li>Error writing to an onboard Micro SD card.</li> <li>Error sending or receiving data over the network.</li> <li>Unauthorized access to the camera.</li> </ul> |
| Premium Features         |                                                                                                                                                                                                                                                                                             |
| Motion                   | An object moves through any part of the scene.                                                                                                                                                                                                                                              |
| Tripwire                 | A target crosses a user-defined line.                                                                                                                                                                                                                                                       |
| Intrusion                | A target enters or exits a defined perimeter.                                                                                                                                                                                                                                               |
| Scene Change             | A person or object moves the camera to change the scene or covers the camera to obscure the scene.                                                                                                                                                                                          |
| Abandoned/Missing Object | A target leaves an object in designated area, or a target removes an object from the same designated area.                                                                                                                                                                                  |

Advanced Features (records data from IP cameras with Advanced Features)

|                  |                                                                                                                     |
|------------------|---------------------------------------------------------------------------------------------------------------------|
| Facial Detection | Detects and captures a snapshot of a human face in a defined area within a scene.                                   |
| Face Recognition | Triggers an event if the connected facial recognition camera matches a face to one stored on the camera's database. |
| People Counting  | Measure the number of customers, visitors or passengers in a surveillance scene.                                    |
| Heat Map         | Generates a visual representation of data.                                                                          |

ePoE/EOC Transmission Distances

Via CAT5E/CAT6 Ethernet Cable

ePoE supply voltage 48 V  
Maximum DC resistance < 10 Ω/100 m

| Cable Length, m (ft) | Bandwidth, Mbps | PoE Load Capacity, W | Hi-PoE Load Capacity, W | Working Mode |
|----------------------|-----------------|----------------------|-------------------------|--------------|
| 100 (328)            | 100             | 25.5                 | 53                      | IEEE/E100    |
| 200 (656)            | 100             | 25.5                 | 33                      | E100         |
| 300 (984)            | 100             | 19                   | 19                      | E100         |
| 400 (1312)           | 10              | 17                   | 17                      | E10          |
| 500 (1640)           | 10              | 13                   | 13                      | E10          |
| 800 (2625)           | 10              | 7                    | 7                       | E10          |

Via CAT5E/CAT6 Ethernet Cable

ePoE supply voltage 53 V  
Maximum DC resistance < 10 Ω/100 m

| Cable Length, m (ft) | Bandwidth, Mbps | PoE Load Capacity, W | Hi-PoE Load Capacity, W | Working Mode |
|----------------------|-----------------|----------------------|-------------------------|--------------|
| 100 (328)            | 100             | 25.5                 | 53                      | IEEE/E100    |
| 200 (656)            | 100             | 25.5                 | 47                      | E100         |
| 300 (984)            | 100             | 25.5                 | 32                      | E100         |
| 400 (1312)           | 10              | 23                   | 26                      | E10          |
| 500 (1640)           | 10              | 20                   | 20                      | E10          |
| 800 (2625)           | 10              | 13                   | 13                      | E10          |

Via RG-59 Coaxial Cable

ePoE supply voltage 48 V  
Maximum DC resistance < 5 Ω/100 m

| Cable Length, m (ft) | Bandwidth, Mbps | PoE Load Capacity, W | Hi-PoE Load Capacity, W | Working Mode |
|----------------------|-----------------|----------------------|-------------------------|--------------|
| 100 (328)            | 100             | 25.5                 | 50                      | IEEE/E100    |
| 200 (656)            | 100             | 25.5                 | 30                      | E100         |
| 300 (984)            | 100             | 18                   | 18                      | E100         |
| 400 (1312)           | 100             | 15                   | 15                      | E100         |
| 500 (1640)           | 10              | 12                   | 12                      | E10          |
| 800 (2625)           | 10              | 6                    | 6                       | E10          |
| 1000 (3281)          | 10              | 5                    | 5                       | E10          |


Via RG-59 Coaxial Cable

ePoE supply voltage 53 V  
Maximum DC resistance < 5 Ω/100 m

| Cable Length, m (ft) | Bandwidth, Mbps | PoE Load Capacity, W | Hi-PoE Load Capacity, W | Working Mode |
|----------------------|-----------------|----------------------|-------------------------|--------------|
| 100 (328)            | 100             | 25.5                 | 52                      | IEEE/E100    |
| 200 (656)            | 100             | 25.5                 | 48                      | E100         |
| 300 (984)            | 100             | 25.5                 | 30                      | E100         |
| 400 (1312)           | 100             | 20                   | 23                      | E100         |
| 500 (1640)           | 10              | 16                   | 16                      | E10          |
| 800 (2625)           | 10              | 10                   | 10                      | E10          |
| 1000 (3281)          | 10              | 8                    | 8                       | E10          |

ePoE and EoC Applications


Pure Ethernet



Passive EoC




EoC with Single-port EoC Receiver




3. Each channel supports using either an IVS function or an Analytics+ function at one time.

| Ordering Information   |                       |                                                                                         |
|------------------------|-----------------------|-----------------------------------------------------------------------------------------|
| Type                   | Part Number           | Description                                                                             |
| 4K NVR with Analytics+ | DHI-NVR4216-16P-I 2TB | 16-channel 1U ePoE 4K, H.265 Network Video Recorder with Analytics+, 2 TB               |
|                        | DHI-NVR4216-16P-I 4TB | 16-channel 1U ePoE 4K, H.265 Network Video Recorder with Analytics+, 4 TB               |
|                        | DHI-NVR4216-16P-I 6TB | 16-channel 1U ePoE 4K, H.265 Network Video Recorder with Analytics+, 6 TB               |
|                        | DHI-NVR4216-16P-I 8TB | 16-channel 1U ePoE 4K, H.265 Network Video Recorder with Analytics+, 8 TB               |
| Accessories, optional  | PFH101                | Rack Mount Tray<br>482.60 mm x 281.20 mm x 43.7 mm<br>(19.0 in. x 11.07 in. x 1.72 in.) |
| ePoE Accessories       | LR1002                | EoC Passive Converter                                                                   |

**Dimensions(mm/in.)**

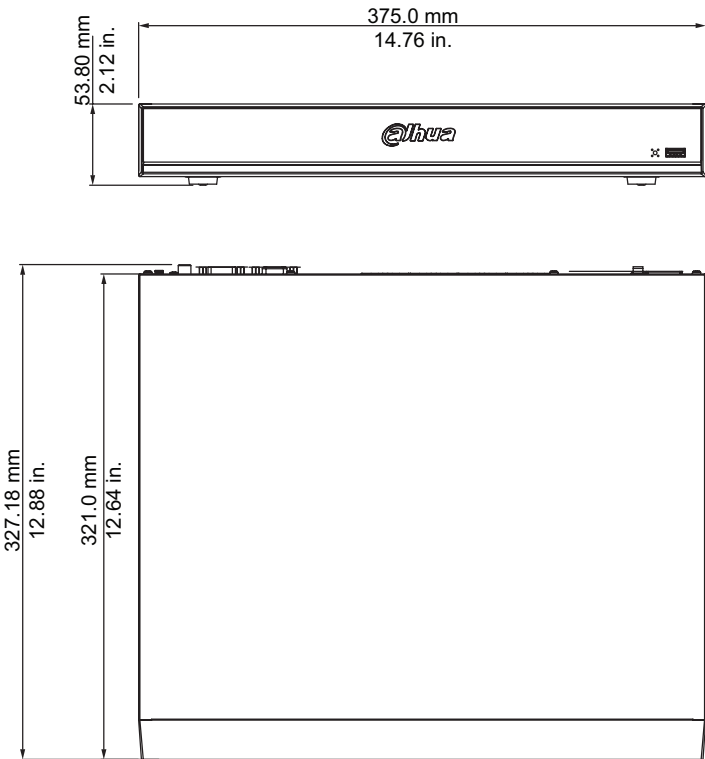

**Rear Panel**

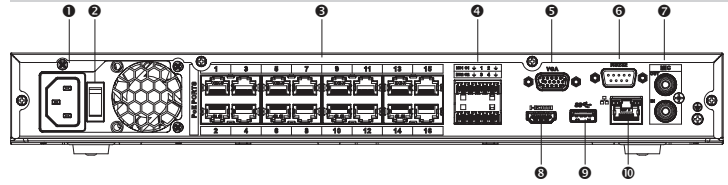

|   |                                                           |    |                                               |
|---|-----------------------------------------------------------|----|-----------------------------------------------|
| 1 | Power Input                                               | 6  | RS232 Port                                    |
| 2 | Power Switch                                              | 7  | Audio Input (x1 RCA)<br>Audio Output (x1 RCA) |
| 3 | PoE/PoE+ Ports (x16 RJ-45)<br>ePoE/EoC Ports: 1 through 8 | 8  | HDMI Output                                   |
| 4 | Alarm Input (x2)<br>Alarm Output (x2)                     | 9  | USB 3.0 Port                                  |
| 5 | VGA Output                                                | 10 | RJ-45 Ethernet Port (1000 Mbps)               |