

# WiFi Color Indoor Monitor

## 7-inch Touch Screen



- 7-inch Capacitive Touch Screen, 1024 x 600 Resolution
- Simplified Connection and Setup
- Supports Alarm Integration with 3rd Party Intrusion Devices
- Monitor up to 32 IP Cameras
- Integrated Micro SD Card Slot, maximum 32 GB
- Perform Call Session Recordings and Take Snapshots of Live Video (requires SD card)
- WiFi-enabled and PoE Power Supply
- Setup and Activate up to Six Alarm Inputs and One Alarm Output
- Surface-mounted

### System Overview

The DHI-VTH5221-S Series indoor monitors allow tenants to view and talk with visitors, record call sessions, monitor the surroundings from outdoor stations and IP cameras and remotely unlock doors. Visitors can also leave messages, which can be retrieved from the indoor monitor. The DHI-VTH5221-S Series indoor monitors are used as part of a video intercom solution with compatible outdoor stations.

### Technical Specification

#### System

Main Processor	Embedded Micro Processor
Operating System	Embedded Linux

#### Display

Viewing Area	7-in. TFT, Capacitive
Resolution	1024 x 600 (WVGA)
Input	Touchscreen Display

#### Interface

Audio	Input: Omnidirectional Microphone Output: Built-in Speaker Two-way Talk
Audio Compression	G.711
Wired Zones	Six (6) On-board Zones
Wireless Zones	Eight (8)
Alarm Out	One (1) Channel
RS485	One (1) Port
Memory	Micro SD Slot, 32 GB maximum



#### Network

Video Compression	H.264
WiFi	IEEE 802.11b/g/n
Ethernet	10/100 Mbps, Self-adaptive
Network Protocol	TCP/IP
Third-party Camera Support	ONVIF H.264 Cameras, maximum resolution of 720p
Management Software	DSS Express/Pro

#### Certifications

Electromagnetic Compatibility (EMC)	FCC CFR 47 Part 15 subpart B ANSI C63.4 - 2009 EN 55022:2010, EN 55024:2010, EN 50130-4:2011, EN 61000-6-3:2007, EN 61000-3-2:2006+A1:2009 EN 61000-3-3:2008, IEC 61000-4-2:2008, IEC 61000-4-3:2010, IEC 61000-4-4:2012, IEC 61000-4-5:2005, IEC 61000-4-6:2008, IEC 61000-4-8:2009, IEC 61000-4-11:2004
-------------------------------------	--

#### Electrical

Power	12 VDC or PoE (802.3af) Requires a separate 12 VDC power supply, or power via a PoE switch.
Power Consumption	Standby: < 5 W Operation: < 7 W

#### Environmental

Operating Temperature	-10° C to +55° C (14° F to +131° F)
Operating Humidity	10% to 90%, Relative

#### Construction

Dimensions	215.0 mm x 140.0 mm x 21.0 mm (8.46 in. x 5.51 in. x 0.83 in.)
Net Weight	0.80 kg (1.76 lb)
Installation	Surface-mount

### Outdoor Station Compatibility

The DHI-VTH5221-S Series Indoor Monitors can be used with the following Video Intercom Outdoor Stations:

DHI-VTO2111D-WP-S	WiFi Outdoor Station with mobile app compatibility
DHI-VTO2000A-S	IP Outdoor Station with mobile app compatibility
DHI-VTO1210C-X-S	IP Outdoor Station (Stainless Steel Panel)

### Ordering Information

Type	Part Number	Description
WiFi Monitor	DHI-VTH5221DW-S	7-in. Capacitive Touchscreen Color WiFi Monitor, White Bezel (Includes 4GB Micro SD Card)
	DHI-VTH5221D-S	7-in. Capacitive Touchscreen Color WiFi Monitor, Black Bezel (Includes 4GB Micro SD Card)
Accessories, optional	ADS-12AM-12 12012EPCU	12 VDC, 1 A Power Adapter for DHI-VTH5221D-S/DW-S
	DH-PFS3006-4ET-60	4-Port PoE Ethernet Switch
	DH-PFS3010-8ET-96	8-Port PoE Ethernet Switch

### Accessories

Optional



ADS-12AM-12 12012EPCU  
12 VDC, 1 A Power Adapter  
for use with DHI-VTH5221-S  
Series






DH-PFS3006-4ET-60  
4-Port PoE Ethernet Switch




DH-PFS3010-8ET-96  
8-Port PoE Ethernet Switch

### Dimensions (mm/in.)

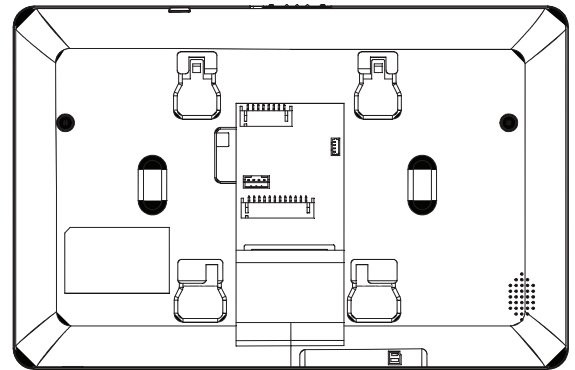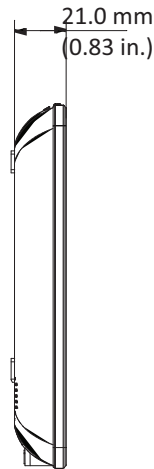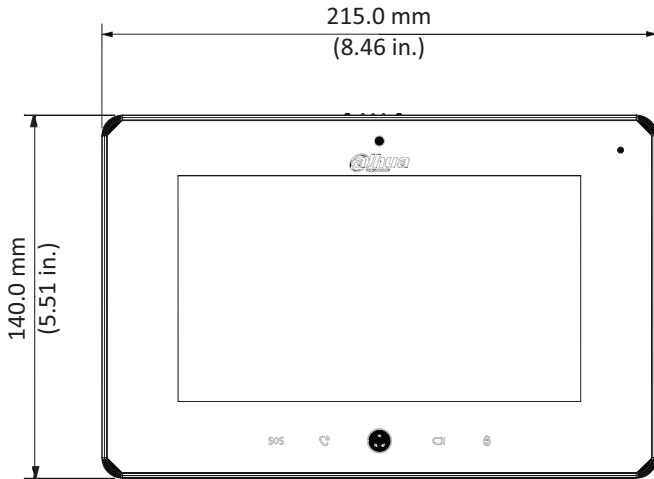

## Applications

### IP - Apartment Solution

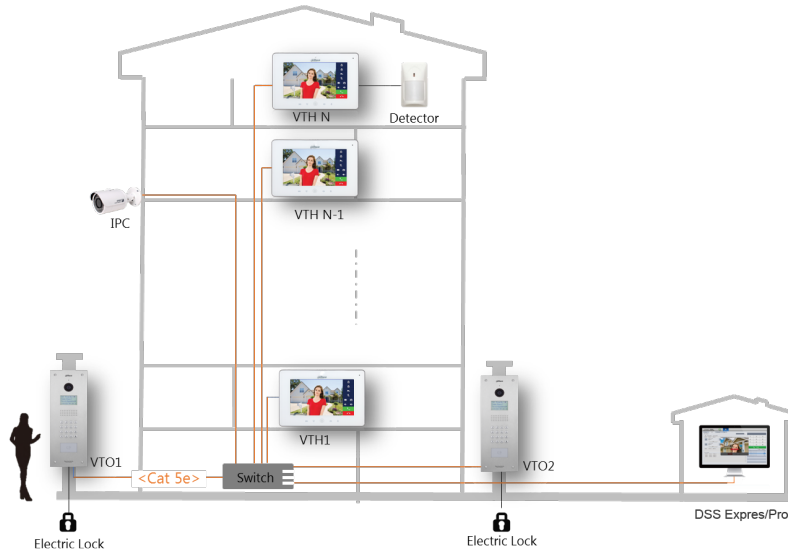

### WiFi - Home Solution

