



**IVA+ Inside**

Vari-Focal Lens with Motorized Zoom and Auto Focus

**STAR-LIGHT PLUS**  
Color in Darkness Technology

H.265 H.264/MJPEG 30fps

NDAA COMPLIANT PRODUCTS

**2.1MP** Resolution

Intelligent Video Analytics (IVA+)

Star-Light Plus™

Vari-Focal Motorized Zoom P-Iris Lens

True WDR

**5 YEAR** Warranty

## Summary

This MEGAPIX® IVA+™ IP camera is your gateway to powerful video analytics features. It is NDAA compliant and provides 2.1MP/1080p resolution at real-time 30fps. The MEGAPIX IVA+ cameras have a powerful engine to detect and classify people, vehicles and objects in real-time with support for logical rules. This camera includes a 2.7-13.5mm vari-focal auto-focus lens with motorized zoom and 5x optical zoom, simultaneous H.265/H.264/MJPEG codec support and Star-Light Plus™ color in near-total darkness technology for quality video in any lighting condition. The weather-resistant vandal ball cameras are IP67 rated, eliminate IR reflections and offer easy angle adjustment for optimal image quality. All MEGAPIX® cameras are ONVIF conformant, assuring their successful integration with any open platform solution on the market.

## Features

- 2.1MP/1080p 1/2.8" image sensor at real-time 30fps
- Star-Light Plus™ color in near-total darkness technology
- Intelligent Video Analytics (IVA) with extended features (IVA+)
- Seamless integration and control of IVA rules with DW Spectrum® IPVMS
- Reduce false alarms
- Increase your recording storage with logic rules and smart recording
- 2.7-13.5mm vari-focal p-iris lens with motorized zoom and auto-focus
- True Wide Dynamic Range (WDR)
- Triple codecs (H.265, H.264, MJPEG) with simultaneous streaming
- 100' Smart IR™ with intelligent camera sync
- Vandal ball housing reduces IR reflection with true 90° tilting and 360° rotation
- Smart DNR™ 3D digital noise reduction
- True day/night mechanical IR cut filter
- Programmable privacy zones
- Auto gain control (AGC)
- Auto white balance (AWB)
- Motion detection
- PoE class 3 and DC12V
- UL listed
- NDAA compliant
- IP67 dust-tight and waterproof to 3 feet
- IK 10-rated impact-resistant
- 5 year warranty





## Accessories (Optional)



## Dimensions

unit: Inch (mm)

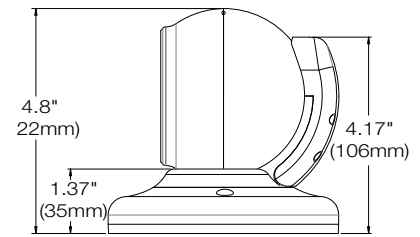

## Specifications



IMAGE	
Image sensor	2.1MP/1080p 1/2.8" CMOS
Total pixels	1945 (H) X 1109 (V)
Minimum scene illumination	0.043 lux (color) 0.0 lux (B/W)
LENS	
Focal length	2.7-13.5mm, F1.8
Lens type	Vari-focal p-iris lens with motorized-zoom and auto-focus
HFOV / VFOV	93.6° - 34.1° / 51.8° - 19.2°
IR distance	100ft range
Optical zoom / digital zoom	x5 optical zoom
OPERATIONAL	
Intelligent Video Analytics	IVA license: intrusion, line crossing, counting line, loitering, enter, exit, tamper IVA+ license: object removed, tailgating, direction, stopped, appear, disappear, object left
Shutter mode	Auto, manual, anti-flicker, slow shutter
Shutter speed	1/15 - 1/32000
Slow shutter	1/2, 1/3, 1/5, 1/6, 1/7.5, 1/10
Auto gain control	Auto
Day and Night	Auto, day (color), night (B/W)
Smart DNR™ 3D digital noise reduction	3D-DNR
Wide Dynamic Range (WDR)	True WDR, 120dB
Privacy zone	16 programmable privacy masks
Backlight compensation (BLC)	Yes
Mirror and flip	Yes
Alarm notifications	Notifications via e-mail and FTP server recording
NETWORK	
LAN	RJ45 (10/100Base-T)
Video compression type	H.265, H.264, MJPEG
Resolution	H.265: 2.1MP/1080p, 720p, VGA, D1, CIF H.264: 2.1MP/1080p, 720p, VGA, D1, CIF MJPEG: 1280x720, 800x600, VGA, 768x432, D1, CIF
Frame rate	Up to 30fps at all resolutions
Video bitrate	100Kbps - 10Mbps, multi-rate for preview and recording
Bitrate control	Multi streaming CBR/VBR at H.264, H.265 (controllable frame rate and bandwidth)
Streaming capability	Dual-stream at different rates and resolutions
IP	IPv4, IPv6
Protocol	TCP/IP, UDP, AutoIP, RTP (UDP/TCP), RTSP, NTP, HTTP, HTTPS, SSL, DNS, DDNS, DHCP, FTP, SMTP, ICMP, SNMPv1/v2/v3 (MIB-2), ONVIF
Security	HTTPS (TLS), IP filtering, 802.1x, digest authentication (ID/PW)
ONVIF conformance	Yes
Web viewer	OS: Windows®, Mac® OS, Linux® Browser: IE®, Google Chrome®, Mozilla Firefox®, Safari® NOTE: Chrome browser is recommended for IVA configuration
Video management software	DW Spectrum® IPVMS
ENVIRONMENTAL	
Operating temperature	-4°F - 122°F (-20°C - 50°C)
Operating humidity	10-90% (non-condensing)
IP and IK rating	IP67-rated, IK10 impact-resistant
Other certifications	UL listed, CE, FCC, RoHS
ELECTRICAL	
Power requirement	DC 12V, PoE (IEEE 802.3af Class 3). (Adapter not included)
Power consumption	DC12V: max 6.4W PoE: max 7.6W
MECHANICAL	
Material	Aluminum vandal ball housing
Dimensions	4.92" x 4.8" (125 x 122 mm)
Weight	1.87lbs (0.85kg)
Warranty	5 year warranty