

DTK-3VWMUSB

3 Outlet Charging Station with Load Sensing Technology



DITEK's 3VWMUSB 3 Outlet Charging Stations are the next wave in power distribution devices that combine DITEK's trusted surge protection with a modern look and feel. Your sensitive electronics are safe with features like an illuminated load-status indicator, 3 AC Outlets and 2 USB charging ports.


Is your circuit overloaded? Now you know the answer. Green = Safe; Orange = Warning; Red = Maximum, Flashing Red = Overload.

Product Features

- 120VAC – 15A
- Illuminated load-status indicator – different colors for each level of load status
- 2 port USB charger (Total 5V/2.4A)

Applications

- Cell phones, tablets, other USB devices
- Counter appliances, home office, bedroom

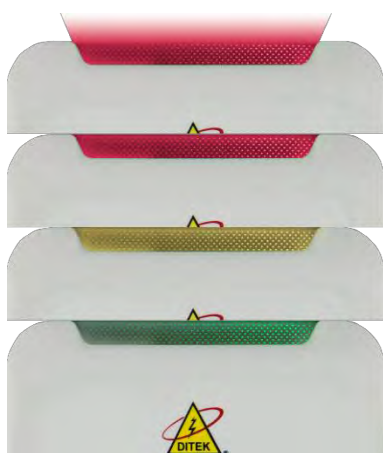

Flashing Red = Overload


Red = Maximum

Yellow = Warning

Green = Safe

LED Colors for Different Levels of Load Status

2-Port USB Charger

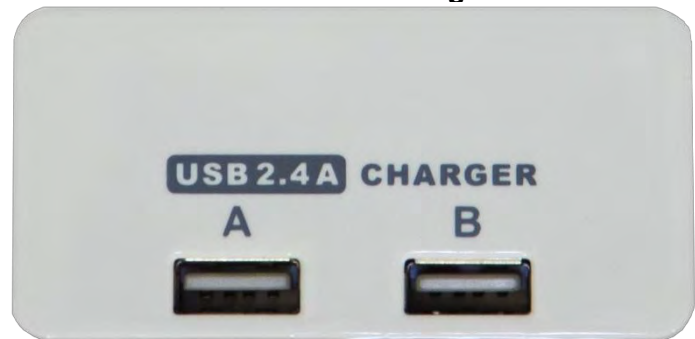

Technical Specifications

Service Voltage:	120VAC
Surge Current Rating:	36,000 Amps
Max. Continuous Current:	15 Amps
Protection Modes:	L – N, L – G, N – G
Operation Frequency:	50/60Hz

Mechanical Characteristics

Connection Method:	Direct Plug-In
Housing:	ABS

Quality, Standards & Approval

Agency Approvals:	UL1449, cUL
APD Type:	Type 3 SPD
Warranty:	10 Year Limited

Every precaution has been taken to ensure that this literature is accurate and complete. DITEK Corporation assumes no responsibility and disclaims all liability for damages resulting from the use of this information or for any errors or omissions.