



1838 ACCESS PLUS

ACCESS CONTROL SYSTEM



pc programmable
via the Internet, LAN, modem or direct connection to a PC



ip addressable
allows homeowners to program the system directly from their PC - software included



flexible
compatible with several access control devices



hold open
up to 4 hold open time zones

- Control access to small businesses, mixed-use buildings, or apartment/college buildings where voice communication is not required
- PC programmable via the Internet, LAN, modem or direct connection to a PC
- IP addressable allowing homeowners to program the system directly from their PC - software included
- Access Control devices include: Card readers, keypads, and MicroPlus RF controls
- Up to six (6) access control devices (card readers, keypads, RF controls, relay board) can be added to the Access Plus system
- Live relay control from your PC

FEATURES


ACCESS CONTROL SOLUTIONS





1838 ACCESS PLUS ACCESS CONTROLLER

The DKS model 1838 AP is ideally suited for small businesses, mixed use buildings or college resident halls where visitor voice communication and access control is not a requirement. The 1838 AP can control up to six (6) entry points with card readers, keypads or RF receivers using RS485 communication. Additionally, two (2) auxiliary relays on the main control board can be activated from the PC to control other devices or access control equipment (a gate operator for example). The Access Plus Programming software is included with the 1838 AP system.

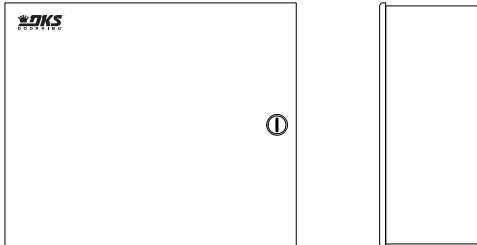

1838 Access Plus

12.25" W x 10.25" H x 4.25" D
311mm W x 260mm H x 108mm D

1838 Access Plus Specs

Capacity

100 device codes (card, keypad, transmitter)
500 event history buffer
10 temporary access codes

Door/Gate Control

Two relays allow for control of vehicular gate/
pedestrian gate
Add 6 additional entry points (RS485) using
card, keypad, or proxy RF devices

Programming Methods

Program via the Internet, LAN, modem or direct
connection to a PC

Advanced Features

27 auto-dial numbers using the central office phone
Access Plus programming software included
Relay board available which allows use of
existing 26-bit wiegand devices
Holiday schedule
Four (4) hold open time zones
Schedule un-lock / lock times
Email notifications
Built-in lighted directory
Live relay control from your PC

Access Devices

Card readers
Keypads
RF controls
Relay board available which allows use of an
existing 26-bit wiegand device

Operating Temp

-10°F to 140°F
-23°C to 62°C

Electrical Requirements

16 VAC, 20 VA system power (250 ma)
UL listed power transformers provided
Ringer Equivalence 0.0 A
Jack Type: RJ11C or W

Safety Standards

FCC (US) DUF6VT-12874-OT-T
DOC (CAN) 1736 4528 A
Complies with UL 294
ETL Listed
Enclosure is NEMA 4x rated

Shipping Weight

Approximately 20 lbs (9 kg)

Warranty

2 year limited factory warranty

Distributed by:

DOORKING®, INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A. Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com

© 2010 All Rights Reserved. Product specifications may change without notice. Rev. 6/10

MEMBER:

