


DSC T-LINK™ RESIDENTIAL IP ALARM COMMUNICATOR

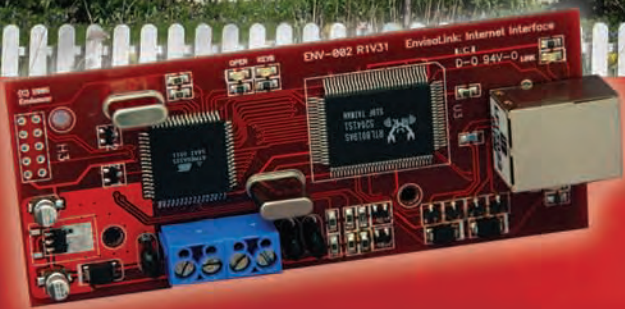

Low-cost IP Alarm Communicator Provides Reliable Protection for Homes

TL150

A valuable addition to the award-winning T-Link family of Internet/network alarm communicators, the economical TL150 residential IP alarm communicator creates fully supervised security solutions between the household and the monitoring station.

The TL150 is effective in a backup or primary alarm communications role and provides homeowners with the ability to arm/disarm their security system and view the status of individual zones through a webpage on their home computer.

- ▶ Supports all PowerSeries control panels
- ▶ Compact, easy-installation design
- ▶ Homeowners can arm/disarm security system and view zone status through a webpage on their home computer
- ▶ Instant, always-on IP communication
- ▶ Works over local LAN/WAN network or the Internet
- ▶ 128-bit AES encryption
- ▶ Supports DHCP (dynamic IP addresses)
- ▶ Low network bandwidth usage
- ▶ Compatible with 10/100BaseT networks
- ▶ Supervised as a KEYBUS module (supervision of both KEYBUS and network connections)
- ▶ T-Link programming (IP address and account number) through a web-browser interface
- ▶ CE and C-Tick listed (TL150CE)

DSC®

DSC T-LINK™ RESIDENTIAL IP ALARM COMMUNICATOR

Homeowners Can Manage Their Security System Through Their Personal Computer

From their personal computer, homeowners are able to arm/disarm their security system and view the status of individual zones through a zone status grid on a webpage. The grid provides additional information that is not available from any DSC keypad. At a glance, homeowners can see how recently a zone was triggered.

Saves Money


The simple-to-install TL150 works on existing home networks to provide secure Internet communications, thereby eliminating the need for a dedicated phone line. In addition, there are no long-distance or toll charges when routing alarm communications via the Internet.

Instant, Always-on IP Communication

Harnessing the speed of the Internet allows signals to be sent almost immediately, whereas phone communication can take 20-30 seconds. As well, the network communication link can be monitored for failure by both the panel and monitoring station receiver.

Secure Communication

The TL150 utilizes industry-leading 128-bit AES encryption to help eliminate security risks. The TL150 communication stream is small and requires only a limited amount of network bandwidth. This ensures that the integrity of the data being transferred never becomes compromised.

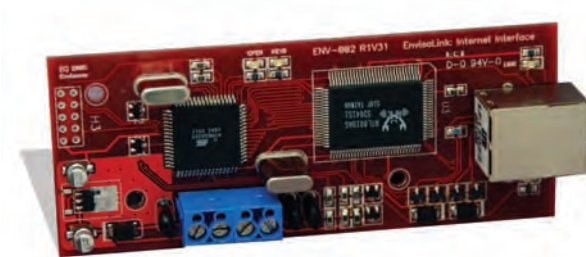

Compatibility

The TL150 is compatible with all PowerSeries control panels:

- PC1616 6-16 zone
- PC1832 8-32 zone
- PC1864 8-64 zone
- Power432™ PC580/585
- Power632™ PC1555MX/1565
- Power832® PC5010
- Power864™ PC5020

Monitoring station receivers:

- Sur-Gard System III with SG-DRL3-IP line card
- Sur-Gard System II

Specifications

| | |
|-----------------------|--------------------------------------|
| Dimensions | 4 1/8" x 1 7/10" (107 mm x 43 mm) |
| Input Voltage | 12 Vdc (from KEYBUS) |
| Current Draw | 65 mA |
| Operating Environment | 32° to 122° F (0° to 50° C) |
| Relative Humidity | 5% to 93% |

Ordering Information:

| | |
|----------------|-----------------------------------|
| T-Link TL150 | Residential IP Alarm Communicator |
| T-Link TL150CE | Residential IP Alarm Communicator |

Distributed by:



For product information
www.dsc.com

Product specifications and availability subject to change without notice. Certain product names mentioned herein may be trade names and/or registered trademarks of other companies.
©2007 2007-06

