


# HDA-VP2MSVFZ-2812

## 2MP 4-IN-1 (TVI/AHD/CVI/960H) StarLight Camera

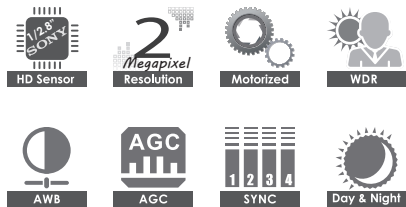

### Specifications

Model	HDA-VP2MSVFZ-2812
Image Sensor	1/2.8" Sony CMOS
Effective Pixels	1945(H) × 1097(V) Approx. 2.13M pixels
Shutter Speed	Auto/Manual (1/60 ~ 1/60,000 sec)
Min. Illumination	Color:DSS:0.00008 lux , BW: DSS:0.00008Lux
Lens	2.8 - 12mm Motorized Lens
View Angle	106.6°-51.8°(H), 76.8°-38.8°(V)
S/N Ratio	More than 42dB(AGC off)
Video Output	Analog output: HD-TVI (1080P) CVBS(960H)1Vp-p Composite Output(75 ohm /BNC)
White Balance	Auto / Auto ext / Preset / Manual
WDR	120Db
AGC	0-20 steps
BLC	Off / BLC
DNR	Off / Low / Middle / High (3D)
Compatibility	TVI / AHD / CVI / 960H
Encode Mode	CBR
Image Quality	Not adjustable under CBR
Resolution	1080P (1920×1080)
Video Frame Rate	PAL:25fps@1080P, NTSC:30fps@1080P
Image Setting	Brightness, WDR, Sharpness, DNR, Exposure, Backlighe, Gamma, Color gain, D-Zoom, etc.
Remote Monitoring	By monitoring the video recorder
Day & Night	Auto / Color / BW / EXT
IR Distance	N/A
IR LED - count	N/A
OSD Menu	Yes
Protection	IP66
Power supply	DC12V±10%
power consumption	600mA
Working Environment	-22 F ~ 140 F ( - 30 C ~ +60 C )
Dimension	5.4"(D) x 5"(H) (136 x 136 x 127mm)
weight	1.83LBS (0.83KG)

### Key Features

- 1/2.8" Sony Starlight Sensor
- Low Illumination
- TVI/AHD/CVI/960H Compatibility
- WDR, 3D DNR
- 2.8~12mm Motorized Lens
- 12V DC
- IP66

### Dimensions

