


IP-5IR2A34/MZ-LR

2MP LPR Starlight Bullet Network Camera



- Starlight
- 1080P (1920x1080)@30fps
- Support Smart H.265/H.264 Coding
- ICR auto switch, true day/night
- 50~70m IR night view distance; Motorized zoom lens
- 3D DNR, True WDR, HLC, BLC, and ROI coding
- 1CH audio input and 1CH audio output; Hardware reset
- Built-in micro SD card slot, up to 128GB
- 1CH alarm input; 1CH alarm output
- DC12V/PoE power supply
- P2P function optional
- IP67 ingress protection
- Support 3 streams
- Support mobile surveillance by smart phones with iOS and Android OS
- Intelligent Analytics: video abnormality (Video tampering, scene change), license plate recognition

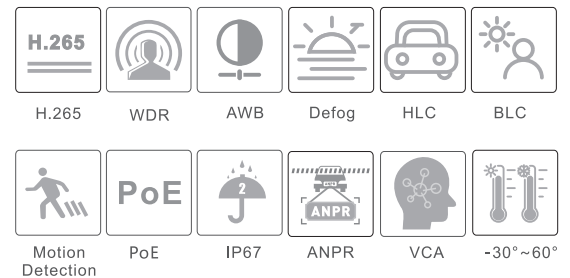

SPECIFICATIONS

IP-5IR2A34/MZ-LR	
Camera	
Image Sensor	1 / 2.8 "CMOS
Image Size	1920 × 1080
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Iris Type	DC-IRIS
Min. Illumination	0.0026 lux@F1.2, AGC ON; 0 lux with IR 0.005 lux@F1.4, AGC ON; 0 lux with IR
Lens	Motorized zoom lens, 2.8~12mm@ F1.4, horizontal FoV: 103.4°~32.4° Motorized zoom lens, 7~22mm@ F1.4, horizontal FoV: 44°~17.6°
Lens Mount	Φ14
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	Yes
Digital NR	3D DNR
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°
Image	
Video Compression	Smart H.265 / H.265+ / H.265 / Smart H.264 / H.264+ / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240
Main Stream	60Hz: 1080P/720P (1~30fps); 50Hz: 1080P/720P (1~25fps) HFR Mode: 1080P/720P (1~60fps/50fps)
Sub Stream	60Hz: 720P/D1/CIF (1~30fps); 50Hz: 720P/D1/CIF (1~25fps)
Third Stream	60Hz: D1/CIF/480x240 (1~30fps); 50Hz: D1/CIF/480x240 (1~25fps)
Bit Rate	64 Kbps ~ 6 Mbps
Bit Rate Type	VBR / CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
Audio Compression	G711A/U
ROI	Each ROI to be configured separately
Interfaces	
Network	RJ45
Video Output	No
Audio	1CH audio input; 1CH audio output
Storage	Built-in micro SD card slot, up to 128GB
Hardware Reset	Yes
RS 485	No
Alarm	1CH alarm input; 1CH alarm output
Functions	
Remote Monitoring	Web browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, 802.1x, UPnP, HTTP, HTTPS, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection; Sensor alarm; SD card full; SD card error; IP address conflict; Network disconnection
Intelligent Analytics	License plate recognition, video abnormality detection (video tampering, scene change)
General Function	Watermark, IP address filtering, video mask, heartbeat, password protection, non-photosensitive switch, image distortion correction
PoE	Yes (802.3af)
IR Distance	50 ~ 70 m
Ingress Protection	IP67
LPR	
Snapshot	Overview and cutout of plate for picture
White List	10000

Capture Speed Range	0~70km/h
Others	
Power Supply	DC12V/PoE
Power Consumption	< 11W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions (mm)	279.5 × 100.3 × 88.9
Weight (net)	Approx. 1.1KG
Installation	Wall mounting; ceiling mounting

DIMENSIONS

