




## **IP-HI2M00A-3.7**

2MP Covert Network Camera

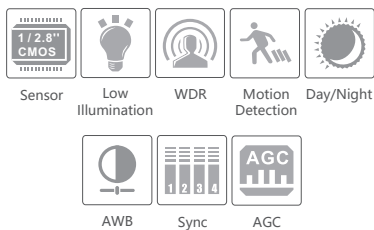

## Features

- H.264 Main Profile Video Compression
- Sony Starivs sensor, true color, low illumination
- 1080P ( 1920 × 1080 ) real-time coding , max resolution 1920
- × 1080 ICR IR-CUT auto switch , true day/night
- 3D DNR, digital WDR
- ROI Coding
- Support smart phone, iPad, remote monitorin
- Support P2P
- Support three streams

## Specification

Model/Specs	IP-HI2M00A-3.7
<b>Camera</b>	
Image Sesnor	1 / 2.8 "CMOS
Image Size	1920 × 1080
Electronic Shutter	1 / 25 s~ 1 / 100000 s
Iris Type	Auto Iris; DC Drive
Digital NR	3D DNR
<b>Image</b>	
Video Compression	H.264 /MJPEG
Resolution	1080P ( 1920 × 1080 ), 720P ( 1280 × 720 ), D1, CIF, 480 × 240
Main Stream	60Hz : 1080P ( 1 ~ 30fps ) / 720P ( 1 ~ 30fps ) 50Hz : 1080P ( 1 ~ 25fps ) / 720P ( 1 ~ 25fps )
Bit Rate	128 Kbps ~ 6 Mbps
Bit Rate Type	VBR / CBR
Quality	Five Levels under VBR , Freely adjustable under CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
<b>Interfaces</b>	
Network	RJ45x1 10/100M Self Adaptive
Image	PV Resistor Interface, IR-CUT Driver Interface, supporting PV Resistor reacts in chain with IR CUT infrared light
<b>Function</b>	
Remote Monitoring	IE Browsing, CMS Remote Control
Online Connection	Supports simultaneous monitoring for multiply users, multi stream real time transmission
Internet Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Interface Protocol	ONVIF, GB-T/28181-2011
Storage	Network Remote Storage
Smart Alarm	Motion Alarm
Day/Night mode	ICR IR-CUT
<b>Others</b>	
Power Supply	DC 12V
Operating Environment	- 25 °C ~ 55 °C , 10 % ~ 90 % ( Relative humidity)
Dimension ( mm )	38 × 38