


XVR501H-04-4KL-I2

4 Channel Penta-brid 4K Mini 1U Digital Video Recorder



ENS Diamond Series XVR501H-04-4KL-I2 features a full-channel SMD Plus to benefit customers with an AI upgrade. The XVR series is designed to reduce false alarms and standard surveillance systems costs, providing great value to customers in search of products with accurate human/vehicle alarm to raise the security level of various indoor and outdoor facilities.

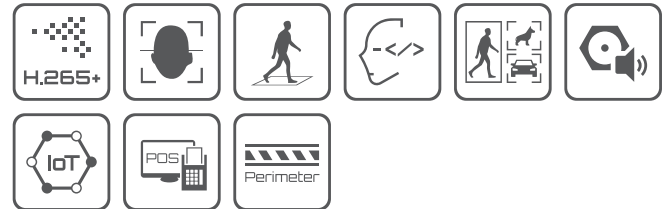

MODEL(S) AVAILABLE

XVR501H-04-4KL-I2

KEY FEATURES

- ▶ H.265+/H.265 dual-stream video compression
- ▶ Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- ▶ Max. 8 channel IP camera inputs, each channel up to 8MP; Max. 64 Mbps incoming bandwidth
- ▶ Perimeter Protection and SMD Plus
- ▶ Up to 2 channels video stream (analog channel) with face recognition
- ▶ IoT & POS functionalities

Product Specifications

System	
Main Processor	Embedded Processor
Operating System	Embedded LINUX

Perimeter Protection	
Performance	2 Channels, 10 IVS for each channel
Object Classification	Human or Vehicle Secondary recognition for Tripwire and Intrusion
AI Search	Search by object classification (human or vehicle)

Face Recognition	
Performance	Max. 8 face pictures/sec processing 2 channels video stream face recognition, only support analog camera
Stranger Mode	Detect strangers' faces (not in device's face database) Similarity threshold set manually
AI Search	Up to 8 target face images search at same time, similarity threshold can be set for each target face image.
Database Management	10 face databases 20,000 total face images Name, gender, birthday, address, certificate type, certificate No., countries, regions, and state can be added to each face picture.
Database Application	Each database can be applied to video channels independently.
Trigger Events	Buzzer, Voice Prompts, Email, Snapshot, Recording, Alarm Out, PTZ Activation, etc.

SMD+	
Performance	4 channels
AI Search	Search by target classification (Human, Vehicle)

Video and Audio	
Analog Camera Input	4 channels, BNC
HDCVI Camera Input	4K/6MP/5MP/4MP/1080P @ 25/30 fps 720P @ 50/60 fps
AHD Camera Input	4K/5MP/4MP/3MP/1080P @ 25/30 fps 720P @ 25/30 fps
TVI Camera Input	4K/5MP/4MP/3MP/1080P @ 25/30 fps 720P @ 25/30 fps
CVBS Camera Input	PAL / NTSC
IP Camera Input	4 + 4 channels, each channel up to 8MP
Audio In/Out	1/1, RCA
Two-Way Talk	Reuse audio in/out, RCA

Recording	
Compression	AI Coding / H.265+ / H.265 / H.264+ / H.264
Resolution	4K / 6MP / 5MP / 4K-N / 4MP / 3MP / 4M-N / 1080P / 720P / 960H / D1 / CIF
Record Interval	1 ~ 60 min (Default: 60 min) Pre-record: 1 s ~ 30 s / Post-record: 10 s ~ 300 s

Record Rate	Main stream: All channel 4K @ 7 fps; 6MP @ 10 fps; 5MP @ 12 fps; 4K-N, 4MP/3MP @ 15 fps; 4M-N/1080P/720P/960H/D1/CIF @ 25/30fps Sub stream: 960H @ 15 fps; D1/CIF @ 25/30 fps
Bit Rate	32 Kbps ~ 6144 Kbps per channel
Recorder Mode	Manual, Schedule (General, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Audio Compression	AAC (only for the 1st channel), G.711A, G.711U, PCM
Audio Sample Rate	8 KHz, 16 bit per channel
Audio Bit Rate	64 Kbps per channel

Display	
Interface	1 HDMI , 1 VGA
Resolution	HDMI: 3840×2160, 1920×1080, 1280×1024, 1280×720 VGA: 1920 × 1080, 1280 × 1024, 1280 × 720
Multi-screen Display	When IP extension mode not enabled: 1/4 When IP extension mode enabled: 1/4/8/9
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording

Network and Interface	
Interface	1 RJ-45 port (10/100 Mbps)
Network Protocol	HTTP, HTTPS, TCP/IP, IPv4/IPv6, Wi-Fi, 3G/4G, SNMP, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search (Supports ENS Diamond Series IP camera, DVR, NVS, etc.)
Network Max. Users	128
Mobile	IOS, Android
Network Interoperability	ONVIF 16.12, CGI Conformant
USB	2 × USB 2.0 ports
RS232	N/A
RS485	1 port for PTZ control
Internal HDD	1 SATA port, up to 10 TB capacity
eSATA	N/A

Video Detection and Alarm	
Trigger Event	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 × 18), Video Loss, Tampering and Diagnosis
Alarm Input	4
Relay Outputs	2

Playback and Backup	
Sync Playback	1/4
Search Mode	Time and Date, Alarm, Motion Detection, and Exact Search (accurate to 1 s)


Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
Backup Mode	USB device / Network

General	
Power Supply	12 V DC / 2 A
Power Consumption, NVR	< 7 W, without HDD
Operating Conditions	-10°C ~ 55°C (14°F ~ 131°F) / Less than 90% RH
Storage Conditions	-20°C ~ 70°C (-4°F ~ 158°F) / Less than 90% RH
Dimensions	Mini 1U, 325.0 mm × 257.0 mm × 55.0 mm (12.80" × 10.11" × 2.17")
Net Weight	1200 g (2.7 lb), without HDD
Gross Weight	1900 g (4.2 lb)
Installation	Desktop installation

General	
Thrid-Party Support	Arecont Vision, AXIS, Canon, Dynacolor, Panasonic, Pelco, Samsung, Sanyo, Sony, plus more


Certifications	
Certifications	FCC: Part 15 Subpart B
	CE: CE-LVD: EN 60950-1/IEC 60950-1 CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024

Product Dimensions (mm [inch])

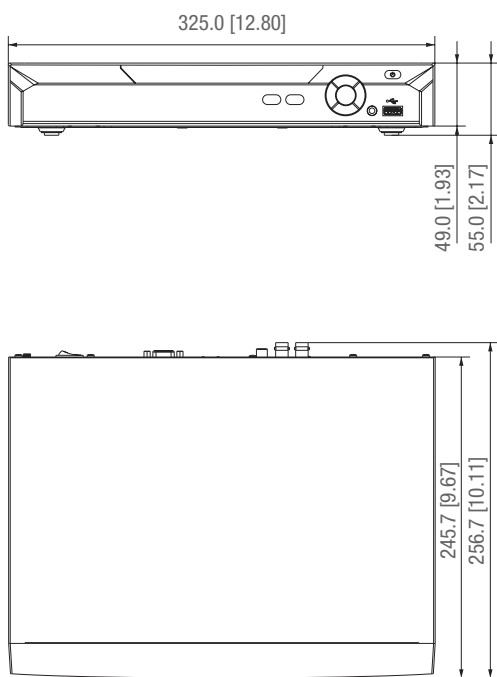

Rear Panel

1	Video in	6	Network interface
2	Audio in, RCA connector	7	RS485 interface
3	Audio out, RCA connector	8	DC 12 V power input
4	HDMI interface	9	VGA interface
5	USB interface	10	Power switch

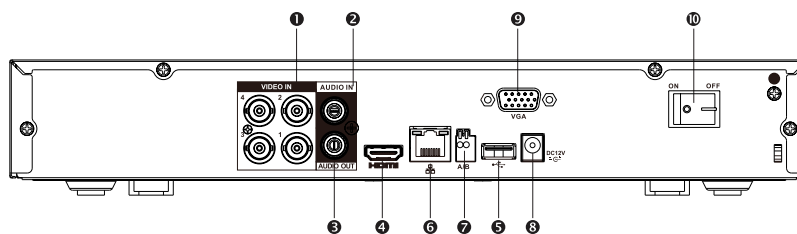

Plainview, NY
50 Commercial St., Plainview, NY 11803
Tel: 516-870-3779

Downtown LA, CA
1113 Venice Blvd., Los Angeles, CA 90015
Tel: 213-218-2260

Miami, FL
1604 NW 84 Ave., Doral, FL 33126
Tel: 786-410-6777

College Point, NY
129-04 14th Ave., College Point, NY 11356
Tel: 718-939-2710

San Francisco, CA
41324 Christy St., San Francisco, CA 94538
Tel: 510-584-9007

Chicago, IL
873 Cambridge Dr., Elk Grove Village, IL 60007
Tel: 847-584-2227

Brooklyn, NY
9017 5th Ave., Brooklyn, NY 11209
Tel: 347-507-5533

Houston, TX
1720 Townhurst Dr., Houston, TX 77043
Tel: 430-702-0999

Las Vegas, NV
6671 S Las Vegas Blvd. #210, Las Vegas, NV 89119
Tel: 702-706-5559

City of Industry, CA
525 Parriott Pl., City of Industry, CA 91745
Tel: 626-961-8999

Dallas, TX
12901 Valley Branch Ln., Farmers Branch, TX 75234
Tel: 972-996-1600