




Features:

- Molded Fiberglass Reinforced Polyester (FRP) industrial Enclosure
- Stainless steel quick release latches with padlock hasps
- NEMA Type 3R, 3RX / IP24 rated
- Fully gasketed raised Vented lid & integral mounting flange
- Includes drilled aluminum mounting plate with AC socket cutouts

Applications:

- Remote Wireless LAN WiFi equipment installations
- Indoor and outdoor installations
- Rapid Deployment Installations
- Corrosive environments & hotspot applications
- Protection of equipment from theft or damage

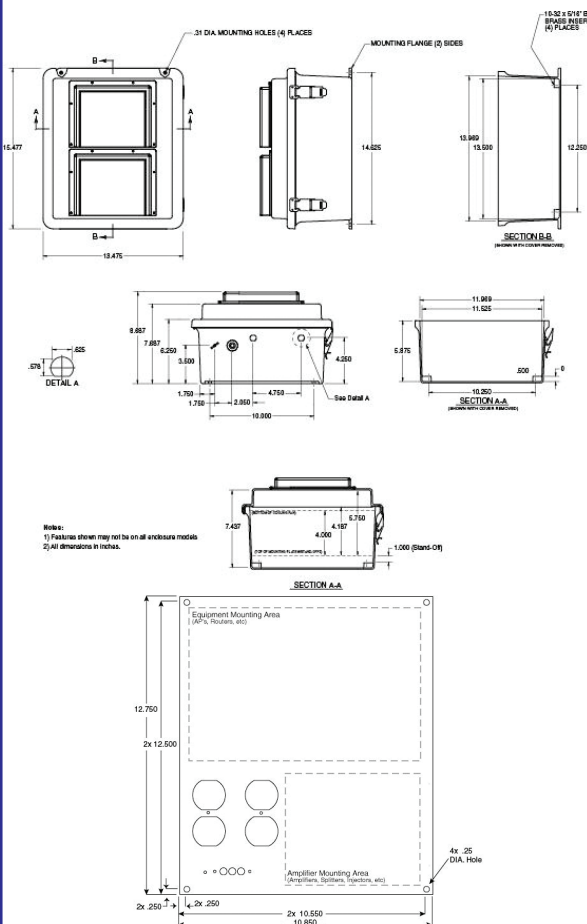

Specifications

Enclosure Material:	Fiberglass Reinforced Polyester
Enclosure Color:	Machine Tool Gray
Voltage:	120 VAC
Fan Power:	22 Watts
Mounting Plate Material:	.10 in. (2.5mm) Thick Anodized Aluminum
Mounting Plate Dimensions:	12.7 x 10.8 inches (32.2 x 27.4 cm)
Weight:	13.3 lbs (6.0 kg)
Outside Dimensions (max):	15.5 x 13.5 x 8.7 inches (39.3 x 34.2 x 22 cm)
Inside Dimensions:	13.5 x 11.5 x 5.8 inches (34.3 x 29.2 x 14.7 cm)
Flame Rating:	UL 94-5V
RoHS Compliant:	Yes
Cable Feed:	1/2" Cable Conduit Connector
Ratings:	NEMA Type 3R, 3RX / IP24