



MUNL

Mortise UnLatch® Strike

Windstorm-Rated, Preload-Handling Strike for Mortise Locksets

Mortise UnLatch is for any application where an electric strike would be used for a mortise type lock. The Mortise UnLatch includes field adjustability for latch and deadlatch positions, releases under pressure and includes a latch status monitoring output.

PRODUCT FEATURES

- No cutting or altering of the jamb required
- Releases under preload
- Fits standard ANSI 4-7/8" strike cutout
- Motorized, no solenoids
- Fully concealed installation
- Maintains dead-latch function at all times
- Continuous duty
- Latch status sensor is standard
- One model works with most North American Mortise Locks (Sargent 7800 and 8200 require tab kit model #STK-1 for retrofit installations)
- MagnaCare Lifetime Replacement No Fault Warranty

PRODUCT OPTIONS

- 12VDC
- 24VDC
- FSUNL for field-selectable fail-safe operation

SPECIFICATIONS

- UL10C Listed
- CAN4-S104, CAN/ULC Listed
- ANSI/BHMA A156.31, Grade 1; E09321, E09322, E09323
- NFPA-252 fire door compliant
- ASTM-E152 fire door compliant
- UL listed to ANSI/SDI-BHMA A250.13 (60 PSI) Windstorm
- Patents: 6,022,056; 6,581,991; 6,902,214

Holding Force:

1500lbs [680kg] static

Current Draw:

12VDC-40mA continuous, minimum 700mA when operating

24VDC-40mA continuous, minimum 500mA when operating

Higher capacity supply (1-4 Amps) is recommended for startup inrush to achieve best operation under pre-load

Operating Temperature:

-20 to +125F [-29 to +52C]

Shipping Weight:

2lbs [0.91kg]

Finishes:

US26D/626 - Stainless Steel


US10B/613 - Oil Rubbed Bronze

US03/605 - Polished Brass

» MODELS

PART # | Description

MUNL-12	Mortise Unlatch - 12VDC
MUNL-24	Mortise Unlatch - 24VDC
FSUNL-12	Fail Safe/Fail Secure UnLatch Module, 12VDC, .90mA
FSUNL-24	Fail Safe/Fail Secure UnLatch Module, 24VDC, 1.4mA

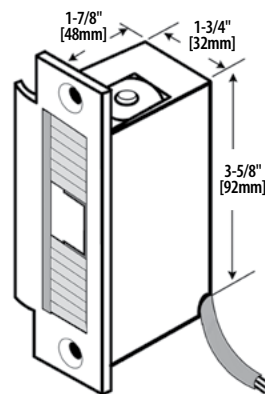

SECURITRON®
ASSA ABLOY