



The EN1751 water detector provides affordable early warning against damage caused by leaking appliances and standing water when used with the Honeywell® FP280 or Flair Electronics® 1010-H2OS36-EN1751 probe, sold separately.

Product Features

Alarms upon detection of 1/4" non distilled water

Tampers if probe wire is cut or disconnected

Fully supervised, with a 60-minute check-in interval

Product Specifications

Dimensions: 3.5" x 1.7" x 0.9" (8.9 x 4.3 x 2.3 cm)

Weight: 1.9 oz. (54 g)

Typical battery life: 8 years at a 5 minute transmission interval

Internal battery type: Panasonic CR123A

Operating environment:

Temperature: -4 to 140°F (-20 to 60°C)

Humidity: Up to 90% (non-condensing)

Market: North America

EchoStream® frequency: 902-928 MHz, frequency hopping spread spectrum

Check-in time frequency: 60 minutes

Regulatory compliance: FCC, ISED, RCM, RoHS

Reference Materials (available at www.inovonics.com)


EN1751 Water Detector Installation Instructions

EchoStream Developer Guide

Inovonics Product Catalog: North America

- The range and performance of any wireless product depends on the structure and environment in which it operates.
- Continual enhancements to our products may cause specifications to change without notice.
- Patents: 7,154,866; 7,554,932; 7,746,804; others pending.
- Inovonics supports recycling and reuse whenever possible. Please recycle these parts using a certified electronics recycler.

Inputs

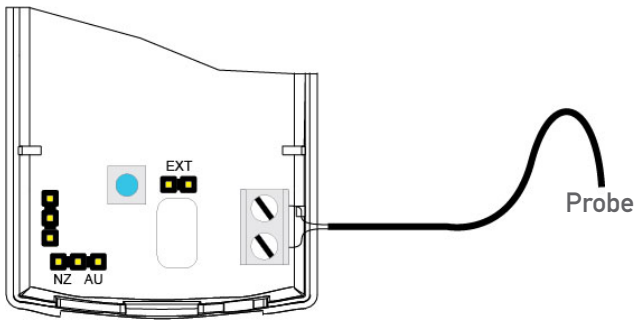

Technical documents

For technical documents visit us at <http://www.inovonics.com/support/tech-documents/> or use the QR code below.



Mounting plate



The transmitter mounting plate hinges to the transmitter. Just mount the plate and snap the transmitter in place.