

16/3 SOOW - 16 AWG 3-Connector Cable - 600V Rated - Industrial Service Cord
C-SOOW-16-3

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



C-SOOW-16-3 SOOW Cord

AWG Size: 16

Number of Conductors: 3

Stranding: 26/30

Strand Size: 0.0147

Insulation Wall: 0.045" Thickness

Amps: 13

Voltage: 600

Max Temperature: 90°

Conductor Material: Bare Copper

Insulation Material: EPDM

Jacket Material: PVC

Jacket Color: black

Ratings/Approvals

NRTL Certified to UL NEC Article 400

MSHA Approved

NRTL Certified to CSA

Special Orders- Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-214-616-6180

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com


Made in the USA

This 16/3 SOOW 3-Connector Cable is 600V rated with an amperage of 13 amps and a temperature range of -40°C to 90°C. This SOOW cord is resistant to acid, water, abrasion, oils, solvents, weather, sunlight, and ozone, and offers excellent flexibility. This cord is designed for hard use with portable tools, industrial and processing equipment and for indoor and outdoor use in hazardous locations and explosion proof locations. This 16/3 SOOW cord is NRTL Certified to UL NEC Article 400, MSHA approved for flame resistance in mining applications, NRTL Certified to CSA and RHS compliant.

Qty 1=1' of cable (specify number of feet when ordering)



Frequently Asked Questions (FAQ)

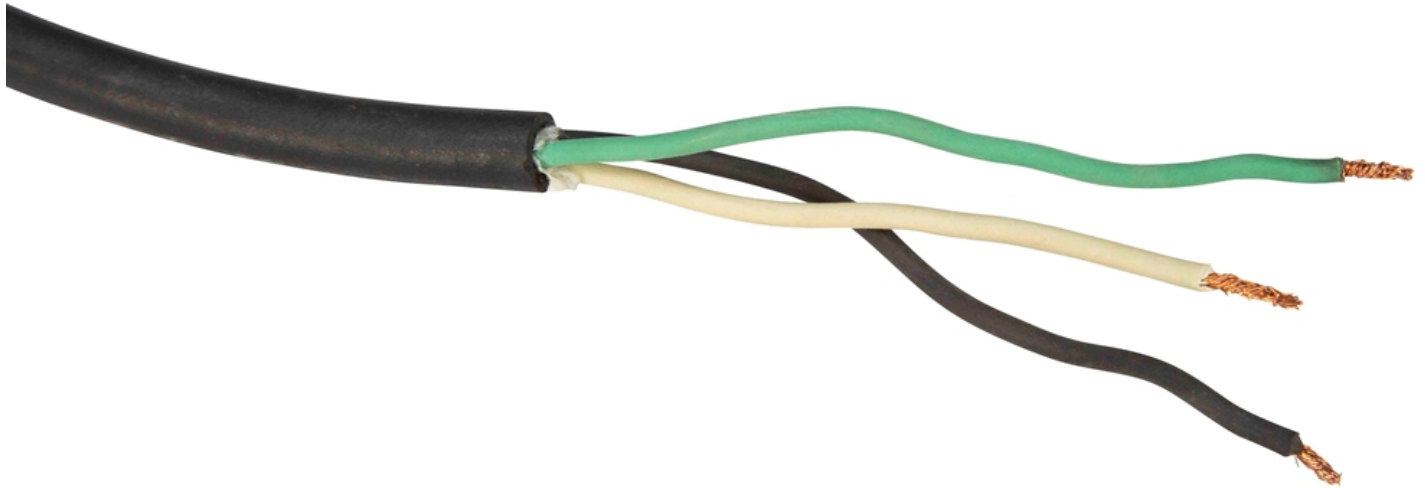

Links (Click on the below items to view):

- [CE Certificate](#)
- [MSDS \(Material Safety Data Sheet\)](#)
- [Operations Manual](#)
- [RoHS Certificate \(Restriction of Hazardous Substances\)](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)