

CORD GRIP (FOR USE WITH EYM) Instruction Manual

Thank you for your purchase of the CGB series cord grip. Familiarize yourself with all warnings, precautions, and procedures outlined within this instruction sheet.

Safety Warnings

FOR PERSONAL SAFETY, ALWAYS FOLLOW THE SAFETY INSTRUCTIONS IN THIS MANUAL TO ENSURE SAFE AND LONG-TERM USE. FAILURE TO FOLLOW SAFETY INSTRUCTIONS MAY CAUSE IGNITION OF HAZARDOUS ATMOSPHERE RESULTING IN SERIOUS PERSONAL INJURE AND / OR PROPERTY DAMAGE.


WARNING

**DO NOT USE THIS PRODUCT FOR OTHER THAN ITS INTENDED USE.
DISCONNECT POWER BEFORE INSTALLATION. DO NOT USE IF DAMAGED.**

INSTALLATION:

The fittings are designed to provide a liquidtight seal when using cables to EYM seal offs.

1. Insert the fitting's threaded portion (side opposite the collet) through the mounting hole.
2. Hand tighten as far as possible.
3. Use a wrench to tighten the body hex.
4. Insert the cable through the sealing nut, collet, and fitting's body to the desired length.
5. Hand tighten the sealing nut as far as possible.
6. Hold the body hex stationary with a wrench. Use another wrench to tighten the sealing nut.

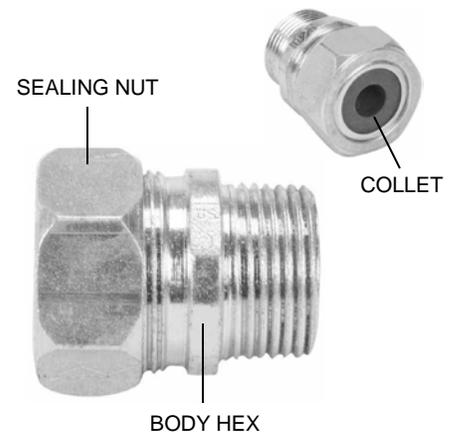

Cable Removal or Replacement Instructions

To loosen the fitting for cable removal or replacement, use a wrench to hold the body hex stationary. Use another wrench to loosen the sealing nut. Grip the disconnected cable and pull while turning the cable in the counterclockwise direction.

Follow all local and state NEC codes when installing. See EYM seal off instructions for further installation steps.



THESE INSTRUCTIONS MAY NOT COVER ALL DETAILS OR VARIATIONS OF THIS PRODUCT FOR YOUR EQUIPMENT OR INSTALLATION REQUIREMENTS. SHOULD FURTHER INFORMATION NOT COVERED BY THESE INSTRUCTIONS BE REQUIRED, PLEASE CONTACT LARSON ELECTRONICS BY EMAIL AT SALES@LARSONELECTRONICS.COM OR BY PHONE AT 1-800-369-6671 FOR FURTHER ASSISTANCE.

PLEASE VISIT LARSONELECTRONICS.COM FOR **WARRANTY** AND **RETURN** INFORMATION.