

## Explosion Proof Daisy Chain LED String Lights - 3 Lights - 20280 Lumens - C1D1/C2D1 - ATEX - IEXEx

**EPL-SL-3-LP24-LED-E2E**

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



### EPL-SL-3-LP24-LED-E2E Explosion Proof Low Profile LED

Lamp Type: LED

Listing: United States, Canada, Europe, Asia

Lamp Dimensions: 30"-L x 5"-W x 3"-H

Weight: 32 lbs

Voltage: Universal 100-277 VAC, 50/60Hz or 11-25V AC/DC

Total Watts: 156W

Lumens: 20,280

Luminous Efficacy: 130 Lm/W

Lamp Life: 60,000+ Hours

Color Temp: 5600K, 4500K, 3000K

Color Rendering Index: >75 CRI

Beam Angle: 100° Horizontal, 140° Vertical

Lighting Configuration: Wide Flood Pattern

Power Efficiency: >95%

Power Factor: 0.992

Amperage: 1.3A @ 120V, 0.65 @ 240V, 0.57 @ 277V

Ambient Operating Temp Range:-50° C to +65°C

Operating Temp Rating: T5

Housing Material: Copper Free Cast Aluminum

Lens Material: Hardened Borosilicate Glass

Mounting: Aluminum Hooks, Eyelets, Adjustable Brackets

Wiring: 115' 12/3 - 20' Spacing - 65' Whip, 10' Out w/ Outlet

### Ratings/Approvals

Class I, Division 1&2, Groups B, C, D T5

Class II, Division 1&2 Groups E,F,G T5

Class III, Division 1&2 T5

ATEX 2G Ex d IIB+H2 T5 Gb

ATEX 1D Ex tb IIIC T5 Da

IECEX Ex d IIB+H2 T5 Gb

IECEX Ex tb IIIC T5 Da

Certified to UL 844 Ed. 13

Certified to UL 1598

Certified to UL 8750

Certified to C22.2 No. 137 Rev 2009

Certified to C22.2 No. 250.0

Certified to C22.2 No. 250.13

Certified to EN 60079-0:2012

Certified to EN 60079-1:2007

Certified to EN 60079-31:2009

Certified to IEC 80079-34:2011

Paint Spray Booth Approved

### Special Orders- Requirements

Contact us for special requirements

**Toll Free:** 1-800-369-6671

**Intl:** 1-214-616-6180

**Fax:** 1-903-498-3364

**E-mail:** [sales@larsonelectronics.com](mailto:sales@larsonelectronics.com)

### **Made in the USA**

The Larson Electronics EPL-SL-3-LP24-LED-E2E Low Profile Explosion Proof Daisy Chain String Light set provides operators with a powerful and energy efficient alternative to traditional hazardous location portable stringers. LED technology and compact design makes this LED stringers an excellent replacement upgrade option for bulky and high maintenance cost older fixtures. This explosion proof LED light has a T5 temperature rating and carries a paint spray booth, ATEX and IECEx certifications, and is approved for use in United States, Canada, Europe, and Asia markets. It is ideal for applications such as paint booths, oil rigs, offshore applications, petrochemical, manufacturing, chemical storage, water


**treatment centers, and food processing plants where a where flammable gases, vapors, or dusts exist or stand the potential to exist.**

This explosion proof string light set from Larson Electronics contains a total of three 52 watt explosion proof LED work lights producing a combined 20,280 lumens. Each fixture is equipped with aluminum hooks and connected in series along 40 feet of 14/3 SOOW explosion proof cord. The C1D1 LED light fixtures are junctioned together, with 20 feet of 14/3 SOOW cable between the fixture. With this arrangement, each drop light cannot spark if pulled apart or dragged. A 65 foot tail section of main SOOW cord is included to allow ample length for connection to power sources. The cord on this unit is terminated with a Class 1, Division 1 explosion proof plug for complete protection. Extending from the last fixture is 10 feet of SOOW connecting an explosion proof outlet that provides the ability to connect multiple units end to end, allowing operators to daisy chain multiple stringers together along the jobsite.

Each Class 1 Division 1 & 2, Class 2 Division 1 & 2 low profile explosion proof light fixture provides 6,760 lumens of high quality light while only drawing 52 watts. The copper free aluminum alloy body is powder coated for added durability and an attractive aesthetic appearance. Special heat dissipating design in conjunction with LED technology helps this fixture to achieve an excellent 60,000 hour rated lifespan with 80% lumen retention at the 60,000 hour mark. Light weight and a low profile make this unit an attractive alternative to larger and heavier older fixtures and requires less hardware to install.

The EPL-SL-3-LP24-LED-E2E from Larson Electronics is an integrated low profile linear explosion proof LED light fixture with a unique design. Instead of using diffused glass, optics, or reflectors to distribute the light, Larson Electronics has positioned the boards within the fixture to provide a wide area light without sacrificing quality or light output. Two offset LED assemblies within the fixture allow this explosion proof linear lamp to provide a brilliant 100° horizontal beam spread and 140° vertical beam spread while achieving a 6,760 lumen output to maintain a small form factor. The LED assembly is protected behind a tempered borosilicate glass tube that is protected by an aluminum wire guard to prevent from accident damage to the light fixture.

With each lamp measuring only 5" in width, these drop lights takes up the same surface area as a standard two foot explosion proof drop light, while providing more light output than a two foot, 2-lamp surface mount linear fluorescent fixture. When compared to our EPL-24-2L-T5HO fixture, a single drop light from the EPL-SL-3-LP24-LED-E2E produces twice the light output than the two 24 watt T5HO lamp; this string light set has three of these LED fixtures in the set. The EPL-SL-3-LP24-LED-E2E is an ideal for applications with little space where low profile fixtures are required.

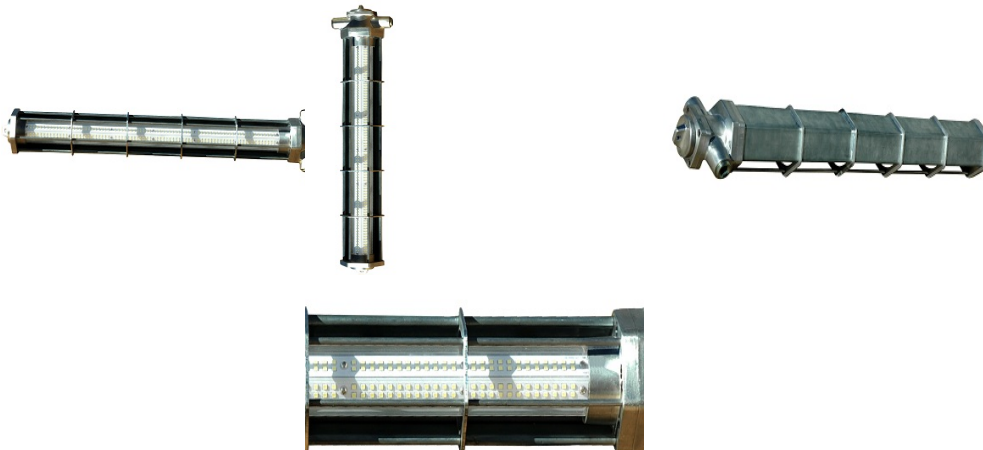

[Click Photo to Enlarge](#)

[Click Photo to Enlarge](#)

[Click Photo to Enlarge](#)

Unlike gas burning and arc type lamps that have glass bulbs, LEDs have no filaments or fragile housings to break during operation. Instead of heating a small filament or using a combination of gases to produce light, light emitting diodes

(LEDs) use semi-conductive materials that illuminate when electric current is applied and emit light. With LED lights, there is no warm up time or cool down time before re-striking and provide instant illumination when powered on, adding to the reliability of LED technology. By nature, LED light sources run significantly cooler than traditional lamps, reducing the chance of accidental burns and increased temperatures due to heat emissions. This solid state design of light emitting diodes provides a more reliable, stable, durable, and energy efficient light source over traditional lighting.

This light is universal voltage capable and can be operated with 100-277 VAC, 50/60Hz. We also offer a low voltage version of this LED fixture that operates on low voltage from 11-25 volts AC/DC. 120V models are equipped with a 5-15, 15 amp, 125 volt rated, 1523 explosion proof straight blade plug. 240V models are equipped with a 6-20, 20 amp, 2023 explosion proof plug. Low voltage AC/DC models are equipped with a 5-15, 15 amp, 125 volt rated, 1523 explosion proof straight blade plug. We also offer pin/sleeve configurations, 36-75V AC/DC, and 277/480v configurations, please contact us for custom configurations.

This explosion proof string light is equipped with an explosion proof outlet 10` from the last lamp, allowing operators to connect multiple units together end to end. Operators can daisy chain up to 6 units end to end in 120 volt or 15 units in 240 volt configurations. Up to two units in 24 volt AC/DC can be connected end to end.

This explosion proof LED light fixture is IP67 rated, dust-proof, and protected against high pressure jets and temporary submersion. The cast aluminum body and LED lamp give this light excellent durability and resistance to vibration and impacts. The housing is specially designed to dissipate heat which increases the efficiency and lifespan of the LEDs and electronics.

Each LED light fixture produces 6,760 lumens with a color temperature of 5600K and a color rendering index of 75 which produces colors and details much more accurately than high pressure sodium or mercury vapor luminaries. We also offer a 3000K warm white and 4500K natural white color temperature options (longer lead times may apply for non-standard temperatures).

**Mounting:** Each fixture is supplied with aluminum hooks for hook mounting. Eyelets on each end of the fixture allow operators to chain hang or S hook mount the fixtures. For semi-permanent installations, surface mount brackets can be used to mount each fixture.

#### **Suggested Applications:**

Paint spray booths, aircraft maintenance, oil drilling rigs, refineries, solvent and cleaning areas, gas processing plants, chemical manufacturing, waste water treatment plants, gas processing plants, offshore applications, oil tankers, mud tanks, sand mines, mining, cold weather applications.

---

#### **High Quality Features**

1. Each unit dialectically tested.
2. Low power consumption.
3. Instant on/off operation.
4. Fixture constructed of die-cast, corrosion resistant, copper free aluminum alloy with epoxy finish.
5. No ballast box. No ballast to replace.
6. Superior color rendering compared to HPS, LPS, MH.
7. Retains 80% lumen output after 60,000 operating hours.
8. Powder coated aluminum fixture body.
9. Mounting Options Include Surface and Pendant.
10. Low profile - Light weight
11. 20,280 Lumen output from only 156 watts
12. Lighter weight, slimmer, brighter alternative to fluorescent configurations.
13. Explosion Proof / Flame Proof US, CAN, ATEX, IECEx Rated for use in the United States, Canada, Mexico, England, Middle East, and Asia.

#### **Superior LED Benefits**

1. 60,000 hour lifespan.
2. Can SAVE 50% or more on energy.
3. Qualifies retrofit projects for financial incentives, including utility rebates, tax credits and energy loan programs.
4. Reduces energy use and prolongs life-spans of peripheral cooling units (A/C, refrigeration)
5. 100% recyclable.
6. No toxins-lead, mercury.
7. No UV light, infrared radiation or CO2 emissions.
8. Qualifies buildings for LED and other sustainable business certifications.
9. Bright, even light maintains consistent color over time.
10. Instant on/off – No flickering, delays or buzzing.
11. Very good color rendering.
12. Vibration/impact resistant.
13. Significantly cooler operation.
14. Less frequent outages, higher output improves workplace safety.




---

## Frequently Asked Questions (FAQ)







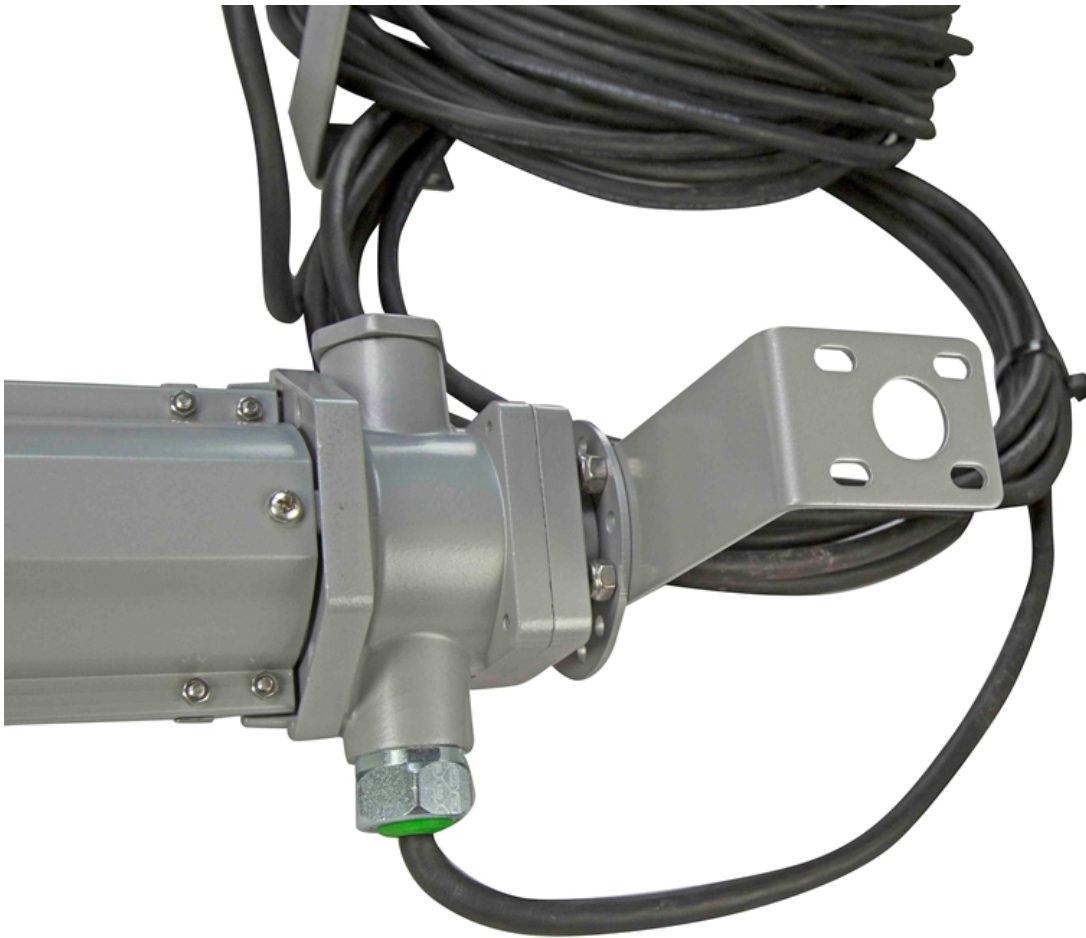



**Warranty:** 60 Months

**Options:**

**EPL-SL-3-LP24-LED-E2E-Voltage**

**Example:** EPL-SL-3-LP24-LED-E2E-120V

Voltage	
120V AC	-120V
240V AC	-240V
12-24V AC/DC	-24V

Links (Click on the below items to view):

- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [HigResPic8](#)
- [HigResPic9](#)
- [HigResPic10](#)
- [Video1](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)