

Explosion Proof Outlet - C1D1, C2D1 - 15-amp Rated - Copper-free Aluminum - NEMA EPO-15A

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



EPO-15A Explosion Proof Power Outlet

Unit Type: Explosion Proof Receptacle

Dimensions: 5 3/4" x 5" x 3"

Weight: -

Voltage: 125V or 250V

Receptacle Current Rating: 15 Amps

Configuration: 2 Pole 3 Wire

Number of Poles: 2

Mating Plugs: ****[EPP-15A](#), [EPP-20-A](#)****

Materials: Copper Free Aluminum, Fiber Glass Reinforced Polyester

Finish: Electrostatically Applied and Baked Powder Epoxy/Polyester

Mounting: Surface, via (4) 1/4" Mounting Holes

Hub Size: 1/2"

Termination: Feed Through or Dead End

Suitable for use in Class I, Division 1, Group B when used with external seals.

Ratings/Features

Class I, Divisions 1&2 Groups C,D

Class I, Zones 1&2 Groups IIB+H2,IIA

Class II, Divisions 1&2 Groups F,G

Class III

NEMA 3, 7 (C,D), 9 (F,G)

Raintight

Spring Loaded Receptacle

Special Orders- Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-214-616-6180


Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com



Frequently Asked Questions (FAQ)



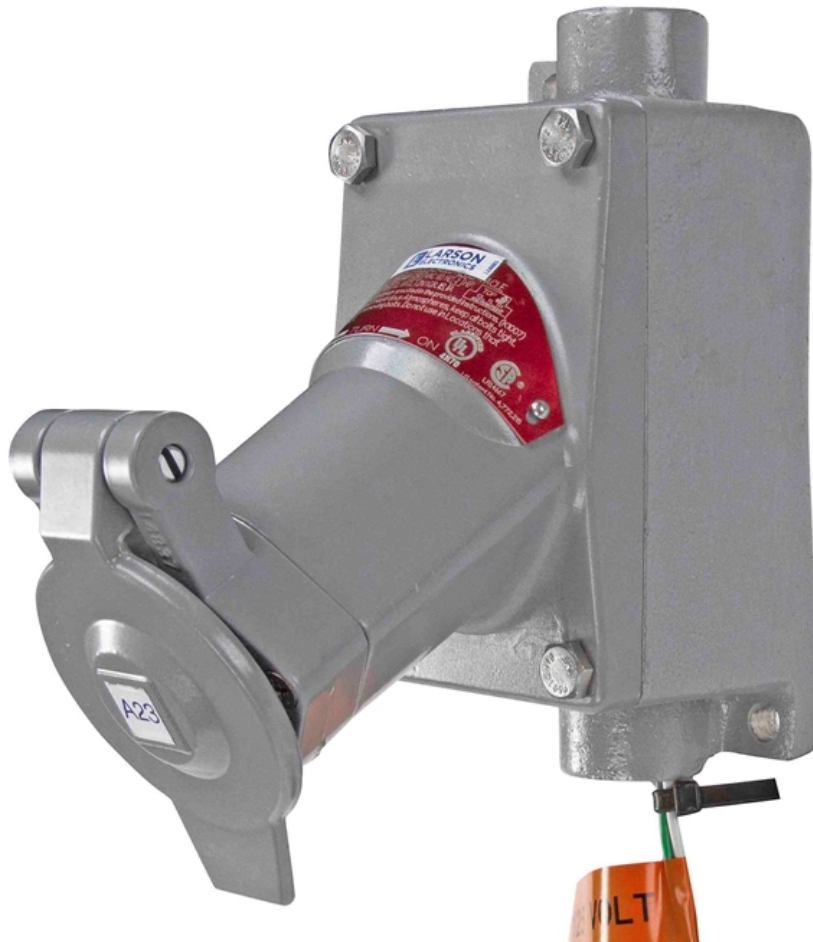





Options:

EPO-15A-Voltage-Termination

Example: EPO-15A-125V-DE

Voltage	
125V AC	-125V
250V AC	-250V

Termination	
DEAD END	-DE
FEED THRU	-FT

Links (Click on the below items to view):

- [Operations Manual](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [HigResPic8](#)
- [HigResPic9](#)
- [Video1](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)