

Explosion Proof Power Receptacle - Class I, II, III - 30A, 2P3W - Mechanically Interlocked EPO-250V-2W3P-30A-ICB

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



EPO-250V-2W3P-30A-ICB Explosion Proof Receptacle

Listing: NRTL Listed for United States, Canada

Dimensions: 5.75"-W X 9.75"-D X 10.5"-H

Weight: -

Breaker Voltage Rating: 125/250V

Current Rating: 30 Amps

HP: 2HP @ 120V 1PH, 3HP @ 120V 3PH, 5HP @ 240V 1PH, 7.5HP @ 240V 3PH

Configuration: 2 Pole, 3 Wire

Grounding: Extra Pole and Housing

Materials: Copper Free Aluminum

Finish: Epoxy Powder Coat

Insulating Blocks: Fiber Glass Reinforced Polyester

Mount: Wall

Hub Configuration: Feed Thru or Dead End

Hub Size: 1" NPT

Ratings

Class I, Divisions 1 & 2 Group B, C, D

Class II, Divisions 1 & 2 Group F, G

Class III

Class 1, Zones 1 & 2 IIB+H2, IIA

NEMA 3, 4, 4X 7(B,C,D), 9(F,G), 12

Special Orders- Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-214-616-6180

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

The Larson Electronics EPO-250V-2W3P-30A-ICB explosion proof power receptacle with built in circuit breaker is approved for Class I, Division 1 & 2, Class II, Division 1 & 2 and Class III sites and provides a safe and secure power connection for portable or stationary electrical devices and equipment in hazardous locations. This 2-pole, 3-wire unit is constructed of copper-free aluminum.

This explosion proof power receptacle with integrated circuit breaker is ideal for operators seeking a high quality explosion proof power outlet receptacle rated for use in hazardous areas. This 2-pole, 3-wire unit is constructed of copper-free aluminum and contains an integral circuit breaker which provides short circuit and thermal overload protection as well as manually operable protection during connection and disconnection of electrical cables. This unit is easily wall mounted via two screw slot tabs at the side of the housing and contains a feed-thru or dead-end configuration with 1" NPT hub size.

A neoprene bushing receptacle seal prevents the entry of water when a cable is connected and a spring loaded receptacle door prevents the entry of dust when the unit is not in use. This unit is rated to handle electrical loads up to 30 amps and is suitable for use in environments where combustible dusts and particulates may be present. The EPO-250V-2W3P-30A-ICB explosion proof power receptacle

and housing unit is constructed of corrosion resistant, non sparking aluminum and finished with an epoxy powder coating. The internal receptacle plug contacts are deeply recessed to protect against accidental touching and are spring loaded and constructed of brass for superior connectivity.

Integral circuit protection: This unit contains an interlocked disconnect switch and circuit breaker to allow safe, 30 Amp at 125/250V AC max, connect and disconnect operation. This circuit breaker also gives protection against short circuits and provides added thermal time delay overload protection. The plug and receptacle contacts cannot be made or broken under load. When the plug is inserted, the plug and receptacle contacts engage before the switch closes. When the plug is withdrawn, the switch opens before the plug and receptacle contacts disengage. This provides the maximum safety of a dead front receptacle. Arcing is isolated in a flame and dust-tight chamber. No special interlock device or manual switch, operators simply pull the plug straight out.

Suggested Applications: Manufacturing, Industrial, Warehouse, Lighting, Lighting, Wet areas or Locations Where Combustible Dust is Present.


At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.



Frequently Asked Questions (FAQ)





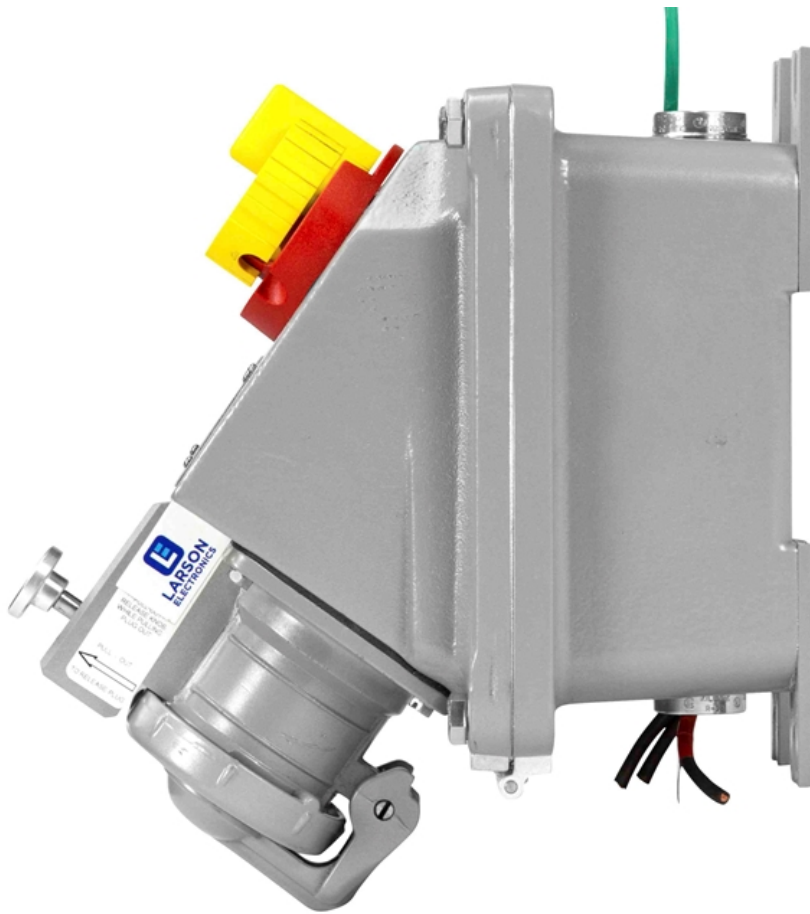



Options:

EPO-250V-2W3P-30A-ICB-Termination

Example: EPO-250V-2W3P-30A-ICB-FT

Termination	
FEED-THRU	-FT
DEAD END	-DE

Links (Click on the below items to view):

- [Operations Manual](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [HigResPic8](#)
- [HigResPic9](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)