

**Explosion Proof Network IP Camera for Cannabis Extraction - 4.0MP, Built-in IR - 20FPS - Flex Coupler - IP66/N4X - BHO/THC/CBD**  
**EXPCMR-CER-IP-POE-4MP-IR-FLX.23-JB.3.SFC**

**Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).**



**EXPCMR-CER-IP-POE-4MP-IR-FLX.23-JB.3.SFC Network Explosion Proof Camera for Cannabis Extraction**

**Listing:** United States, Canada, EU, International

**Camera Dimensions:** 8"L x 6"W x 13"H

**Camera Weight:** -

**Total Watts:** 5W (Max)

**Power Source:** PoE (802.3af)

**Image Sensor:** 1/3" Progressive Scan CMOS sensor

**Signal System:** NTSC

**Video Resolution:** 4.0MP (2688\*1520)

**Frame Rate:** Up to 20fps @ 2688\*1520 resolution

**Compression Type:** H.264, H.264 OVC, MJPEG

**Bit Rate:** 32Kbps - 16Mbps

**Focal Length:** 4mm

**Max Field of View:** 83°

**Shutter Speed:** 1/3s to 1/10,000s

**Min. Illumination:** 0.01 lux (Color) / 0 lux (w/ Built-in IR)

**Infrared Light:** Built-in

**Day/Night:** True D/N w/Mechanical Cut Filter

**Digital Noise Reduction:** 3D DNR

**Ethernet Interface:** RJ45

**Ethernet Speed:** 10/100

**Protocols:** TCP/IP, HTTP, HTTPS, DHCP, UDP, RTP, RTSP and more

**Remote Configuration:** Yes

**Ambient Temperature Range:** -22°F to +140°F

**Housing Materials:** Copper-free Aluminum Alloy

**Lens Material:** 3/8" Thick Tempered Glass

**Mounting:** Ceiling, Surface or Corner

**Mounting Components:** 27.5" EXP Stainless Steel Flex Coupler, 3-port Junction Box w/ Surface Mount Tabs, 3/4" EYM Seal Off and Chico Fiber/Compound Mixture

**Wiring Hub:** (2) 3/4" NPT

**Shipping Weight:** -

**Quick Summary**

Class I, Divisions 1 & 2, Groups B, C, D

Class I, Zones 1 & 2, Groups IIB+H2, IIA

Class II, Divisions 1 & 2, Groups E, F, G

Class III, Divisions 1 & 2

Ex db IIC Gb

Ex tb IIC Gb Db IP66

NEMA 3, 4, 4X, 7 (B, C, D), 9 (E, F, G)

Main stream and two sub streams

Capable of programming unique settings per stream

ONVIF Profile S Certified

WDR (wide dynamic range) for Auto adjusting

Junction Box Included

**Special Orders/Requirements**

Contact us for special requirements

**Toll Free: 1-800-369-6671**

**Intl:** 1-214-616-6180

**Fax:** 1-903-498-3364

**E-mail:** [sales@larsonelectronics.com](mailto:sales@larsonelectronics.com)

**The EXPCMR-CER-IP-POE-4MP-IR-FLX.23-JB.3.SFC Network Explosion Proof Camera from Larson Electronics is a remote inspection camera specifically designed for observation in butane THC extraction rooms and hemp processing facilities. This explosion proof, dust/ignition proof, weather proof and tamper resistant camera provides the operator with a live feed inside mobile extraction labs, as well as indoor cannabis growing**

**and processing sites. Equipped with built-in infrared, this remote inspection camera saves both time and money as well as contributing to workplace safety. An explosion proof flex coupler, 3-port junction box and 3/4" EYM seal off and chico fiber/compound mixture are included with the unit.**

**Camera Features:** The EXPCMR-CER-IP-POE-4MP-IR-FLX.23-JB.3.SFC Network Explosion Proof Camera is powerful solution for cannabis extraction facilities requiring real-time monitoring and cutting-edge security. This unit features a built-in 1/3" progressive-scan CMOS image sensor that delivers up to 4.0MP resolution at 20 fps. The wide angle fixed lens with 83° field of view is designed to cover large areas, including mobile labs and temporary extraction rooms. This explosion proof camera provides a crisp and clear image for everything within the 83° focal area, allowing businesses and persons with access (local/state officials, operation managers, inspectors, etc.) to view the workplace in real-time. Total distance is dependent on mounting height and angle.

The explosion proof unit comes with built-in infrared lights. For additional infrared illumination, an external infrared light can be used with the explosion proof device (not included). For 12-24V DC applications, we recommend the Larson Electronics 12-watt explosion surface-mount infrared LED light ([EXHL-TRN-LE3-IR-1224](#)). As an alternative, we also offer the [EXHL-TRN-LE3-IR-1227](#) for 120-240V AC applications

This remote inspection camera utilizes 120dB true Wide Dynamic Range, 3D Digital Noise Reduction and a true day/night IR-Cut Filter Removal to produce clear images in variable and low light conditions. The camera automatically switches from full color to IR mode when visible light falls below a certain level.

**Wiring:** Link-up with the camera is achieved via a customer provided RJ45 Ethernet cable which is ran back to the customer provided DVR system mounted outside the hazardous location. Camera power is delivered via the same Ethernet cable using Power over Ethernet (PoE) technology. This not only increases flexibility in deployment, but also provides time and cost savings as well.

Our explosion proof cameras with Power over Ethernet (PoE) features enable data transfers and power to be passed through a single Ethernet cable that is usually a Cat 3/Cat 5 cable or better. There are several types of PoE, which come with their own respective standard and maximum power to port capabilities. The IEEE 802.3af PoE standard, with a voltage range of 44.0 - 57.0V, offers 15.4W of DC power for each port. The IEEE 802.3at PoE standard, with a voltage range of 50.0 - 57.0V, provides up to 30W of DC power per port, which is ideal for surveillance cameras, antennas and network access points. The IEEE 802.3bt PoE standard, with a voltage range of 50.0 - 57.0V, provides 60W of DC power for each port. In order to utilize PoE properly, the components, such as the receiving unit and sending device, must be PoE compliant.

**Recording:** To record the stream from this camera, a NVR (network video recorder) is required. Larson Electronics provides a line of explosion proof, hazardous location, and non-classified NVR's to work in conjunction with this explosion proof camera for BHO/THC/CBD extraction facilities. This camera is live-view capable without any NVR system via remote access to the camera. Three streams are available, one main stream for recording and two sub streams for live viewing or additional resources. Each steam can be configured to different resolutions and frame rates.

**Mounting:** The EXPCMR-CER-IP-POE-4MP-IR-FLX.23-JB.3.SFC Network Explosion Proof Camera can be mounted on ceilings, surfaces or around corners from conduit runs. A 27.5" explosion proof, stainless steel coupling with a 12" maximum bend radius ensures the camera can still be adjusted after permanent installations. The flex coupler is terminated inside an included explosion proof 3-port junction box, which comes with surface mounting tabs for seamless setup. One pack of 3/4" EYM seal off and chico/fiber compound mixture is provided for sealing on the camera side of the flex coupler. This mounting solution addresses NEC code guidelines surrounding SOOW cords and permanent installations in combustible sites, while preserving the explosion proof camera's adjustable features.

**Applications:** Hemp processing, cannabis extraction rooms, legal cannabis grow rooms, hemp greenhouses, butane-based extraction facilities, THC, BHO, CBD, medicinal cannabis compliance, security, monitoring, labs, research and more. At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message [sales@larsonelectronics.com](mailto:sales@larsonelectronics.com) for more information about our custom options tailored to meet your specific industry needs.


---




---


## Frequently Asked Questions (FAQ)



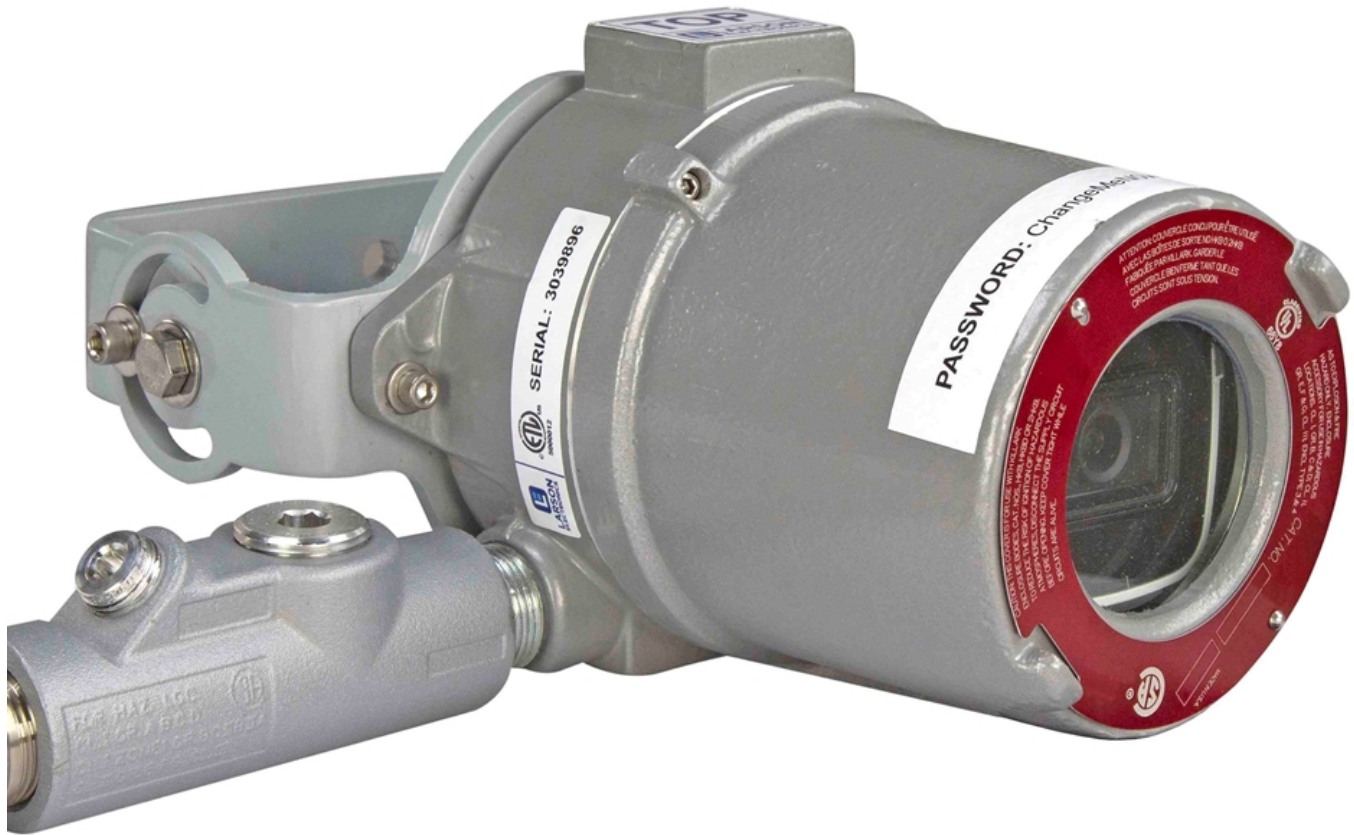



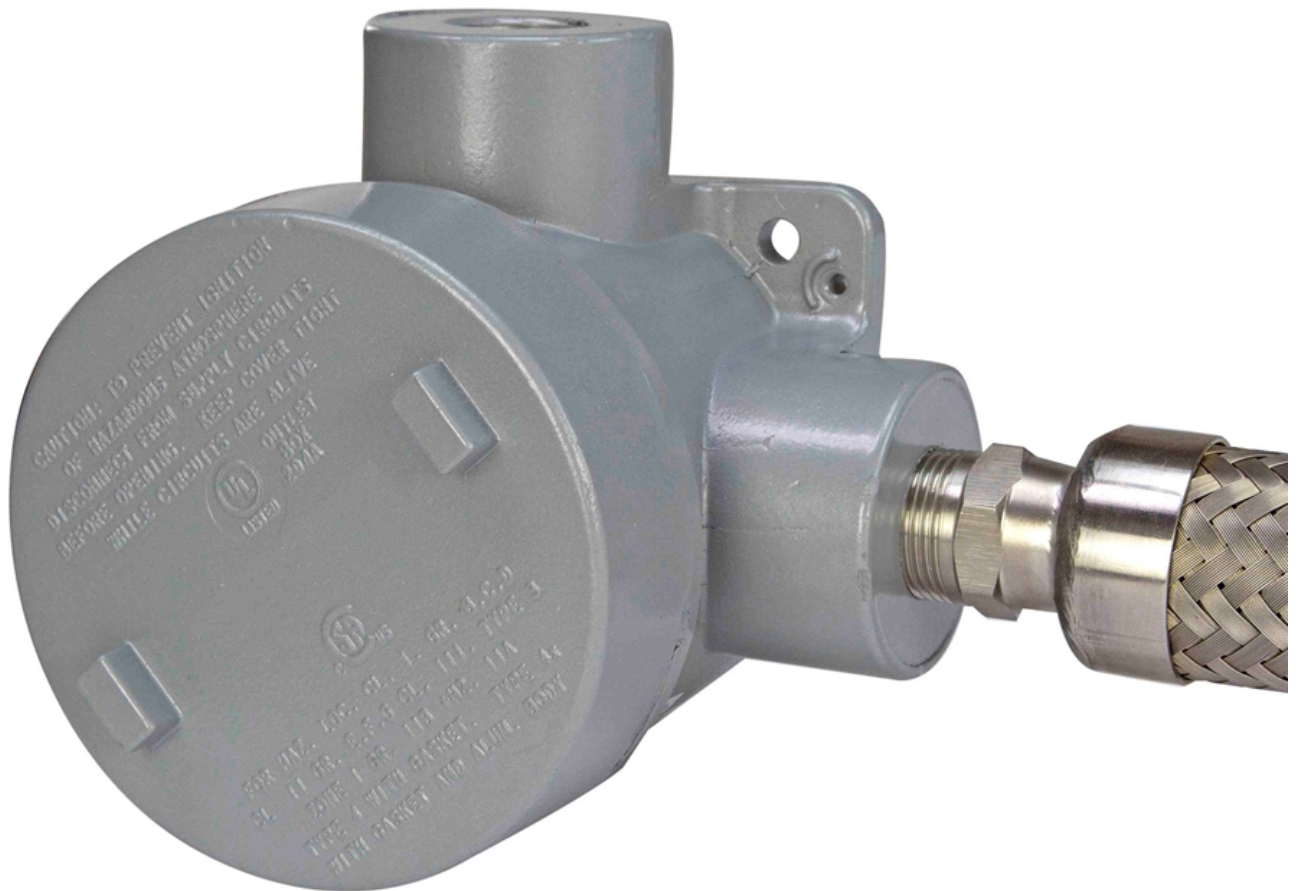

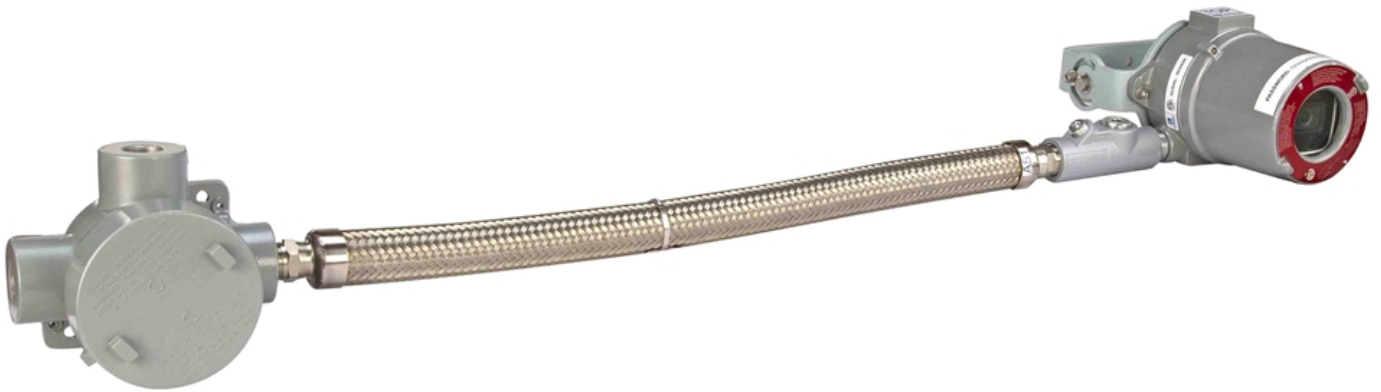



Links (Click on the below items to view):

- [ATEX Certificate \(European Explosion Proof\)](#)
- [Canadian CEC Certificate \(Commonly referred to as CSA Certificate\)](#)
- [CE Certificate](#)
- [Certificate 1, Misc](#)
- [Certificate 2, Misc](#)
- [Certificate 3, Misc](#)
- [Certificate 4, Misc](#)
- [IEC Ex Certificate \(International Explosion Proof\)](#)
- [MSDS \(Material Safety Data Sheet\)](#)
- [Operations Manual](#)
- [RoHS Certificate \(Restriction of Hazardous Substances\)](#)
- [USA NEC Certificate \(Commonly referred to as UL Certificate\)](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [HigResPic8](#)
- [HigResPic9](#)
- [Video1](#)
- [Video2](#)
- [Video3](#)
- [Video4](#)
- [Video5](#)
- [Video6](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)