

## CMHD7382-28F Platinum 8 MP 4-in-1 Dome Camera




### Key Features

- 8.29 MP high performance CMOS
- 3840 × 2160 resolution
- 2.8 mm, fixed lens
- Matrix IR 2.0, smart IR, up to 98 feet (30 meters) IR distance
- DWDR, DNR
- 4-in-1 switchable video output
- IP67, IK10 protections
- OSD Menu via UTC technology with Platinum DVR

## Specifications

<b>Camera</b>	
Image Sensor	8.29 MP progressive scan CMOS
Signal System	PAL / NTSC
Frame Rates	TVI: 8 MP @ 12.5 / 15 fps, 5 MP @ 20 fps, 4 MP @ 25 / 30 fps, 2 MP @ 25 / 30 fps CVI: 8 MP @ 12.5 / 15 fps AHD: 5 MP @ 20 fps CVBS: 960H P/N
Resolution	3840 (H) × 2160 (V)
Min. Illumination	Color: 0.01 Lux @ (F1.2, AGC on), 0 Lux with IR
Shutter Speed	PAL: 1/12.5 to 1/50,000 sec. NTSC: 1/15 to 1/50,000 sec.
Lens	2.8 mm fixed lens
Horizontal Field of View	2.8 mm: 102.2°
Lens Mount	M16
Day & Night	IR cut filter
Angle Adjustment (Bracket)	Pan: 0° to 355°, Tilt: 0° to 75°, Rotate: 0° to 355°
Synchronization	Internal
Digital Wide Dynamic Range (DWDR)	105 dB
<b>Menu</b>	
AGC	Yes
Day / Night Mode	Auto / Color / B & W
White Balance	Auto / Manual
Backlight Compensation (BLC)	Yes
Language	English
Functions	Brightness, Sharpness, DNR, Mirror, Smart IR
<b>Interface</b>	
Video Output	1 HD analog output
Switch Button	TVI / AHD / CVI / CVBS
<b>General</b>	
Operating Conditions	-40° to 140° F (-40° to 60° C); humidity: 90% or less (non-condensation)
Power Supply	12 VDC ±25%
Power Consumption	Max. 5.3 W
Protection Levels	IP67, IK10
Materials	Metal
IR Range	Up to 98 ft (30 m)
Communication	Up the coax, TVI output
Dimensions	∅ 4.4 × 3.2 in. (∅ 111 × 82.4 mm)
Weight	Approx. 1.09 lbs (495 g)


## Dimension

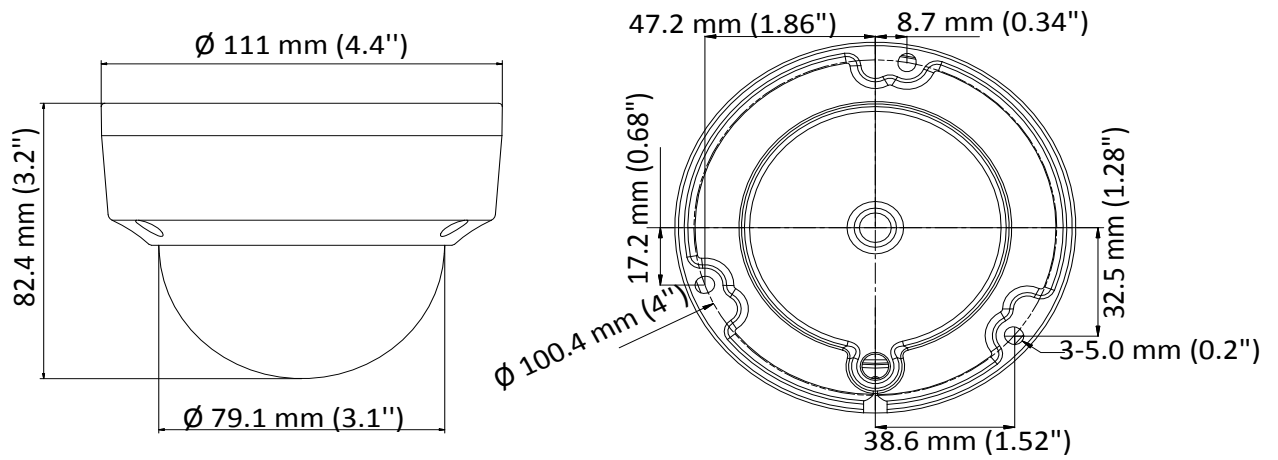


## Accessory



LTB349  
Inclined Ceiling Mount




LTB376  
Pendant Mount




LTB342-110T  
Wall Mount



LTB347  
Junction Box



LTB348  
Wall Mount



LTB378  
Vertical Pole Mount

