

CMHT1722W-CF Platinum 2 MP Full Time Color Turret Camera




Key Features

- 2 MP high performance CMOS
- 1920 × 1080 resolution
- Full time color
- 3.6 mm fixed lens
- Supplemental white light range up to 66 ft (20 m)
- 3D DNR, true WDR
- 4-signals-in-1 video output: TVI / AHD / CVI / CVBS
- IP67
- OSD menu via UTC technology with Platinum DVR


Specifications

Camera	
Image Sensor	2 MP CMOS image sensor
Resolution	1920 (H) × 1080 (V)
Frame Rates	PAL: 1080p @ 25fps NTSC: 1080p @ 30fps
Min. illumination	Color: 0.0005 Lux @ f 1.0, AGC on, 0 Lux with white light
Shutter Speed	PAL: 1/25 to 1/50,000 sec. NTSC: 1/30 to 1/50,000 sec.
Slow Shutter	Max. 16x
Lens	3.6 mm, fixed
Horizontal Field of View	83.6°
Lens Mount	M16
Day & Night	Color
Angle Adjustment	Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360°
Synchronization	Internal synchronization
Wide Dynamic Range (WDR)	120 dB
Menu	
AGC	Yes
White Balance	Auto / Manual
Backlight Compensation (BLC)	Yes
Privacy Mask	4 programmable privacy masks
Motion Detection	4 programmable areas
WDR	Yes
Functions	Brightness, Sharpness, 3D DNR, Mirror, Smart light
Interface	
Video Output	1 x HD analog output
Signal Options	TVI / AHD / CVI / CVBS
General	
Operating Conditions	-40° to 140° F (-40° to 60° C), humidity: 90% or less (non-condensation)
Power Supply	12 V DC ±25%
Power Consumption	Max. 3 W
Protections	IP67
Material	Main Body: Metal, Mounting Base: Plastic
Supplemental Light	White; range up to 66 ft (20 m)
Communication	Up the coax, TVI output
Dimensions	∅ 4.32 × 3.37" (∅ 109.82 × 85.56 mm)
Weight	Approx. 0.74 lb 9336 g)


Dimensions

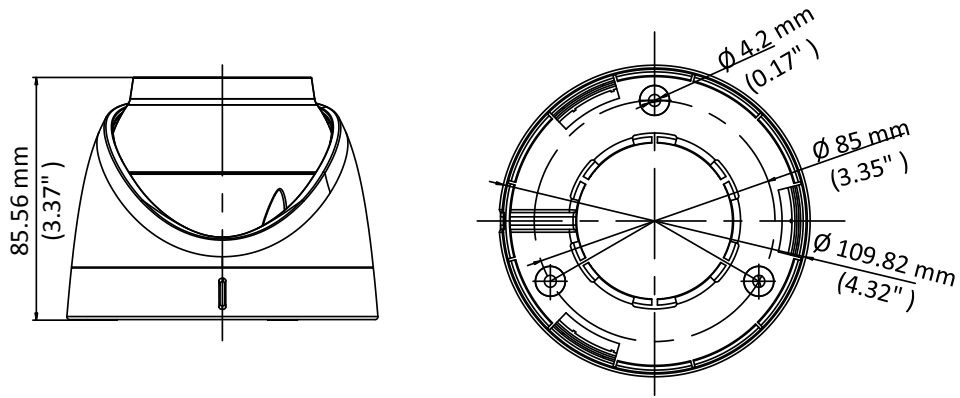


Accessories



LTB342-110T
Wall Mount



LTB378
Vertical Pole Mount



LTB379
Corner Mount