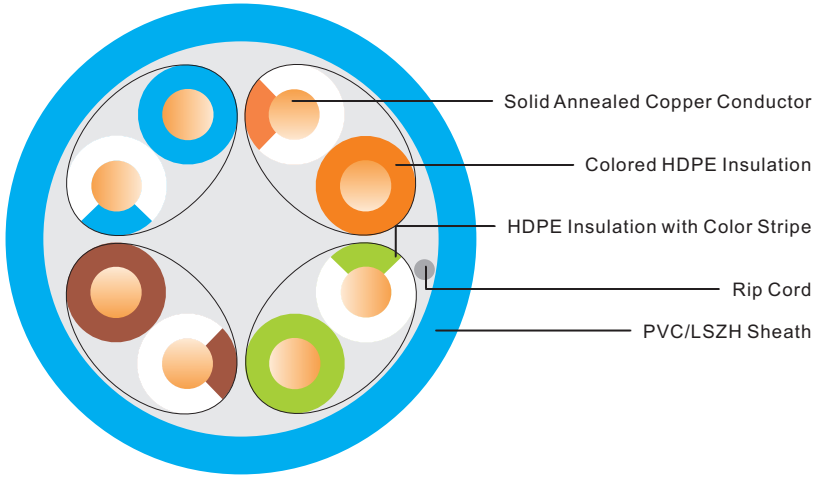



Cross-Sectional View	Packing
	

Sheath Printing	Maximum Referenced Frequency
CAT5E UTP EIA/TIA-568-C.2 4PR 24AWG CMR (UL) E502360 75°C ROHS COMPLIANT S1747 xxx FT	100 MHZ

Reference Standards	Electrical Characteristics		
YD/T1019-2013	20°C Conductor Resistance	Ω / km	≤93.5
ANSI/TIA-568B-C.2	Pair to Pair Capacitance Unbalance	%	≤2
ISO/IEC11801 IEC61156.5	Pair to Ground Capacitance Unbalance	%	/
UI444, UL1666, CE, RoHS	Coupling Attenuation at 30~100 MHz	dB	/

Cable Construction		Physical Performance (Before Ageing)		Unit	
Conductor	Solid Oxygen-free Copper	Elongation at Break of the Sheath	LSZH	%	≥125
Number of Pairs	4P		PVC	%	≥150
Conductor OD	24AWG 0.48 (+/-0.005)mm	Tensile Strength of the Sheath	LSZH	Mpa	≥10.0
Insulation Material	HDPE		PVC	Mpa	≥13.5

Environmental Characteristics (After Ageing)		Unit				
Sheath Material	PVC	Elongation at Break of the Sheath after Ageing (Ageing Condition: 7 days at (100 ± 2) °C)				
Sheath Thickness	0.55 (+/-0.05)mm	After Ageing (Average)	LSZH	Elogation at Break	%	≥100
Sheath OD	5.1 (+/-0.05)mm			Elogation at Break Change Rate	%	-30~+30
Operating Temperature	-20°C to 60°C	After Ageing (Average)	PVC	Elogation at Break	%	≥125
Lay Length (mm)	≤30			Elogation at Break Change Rate	%	-30~+30

Tensile Strength of the Sheath after Ageing (Ageing Condition: 7 days at (100 ± 2) °C)		Unit				
Net Weight	8.8kg/305m	After Ageing (Average)	LSZH	Sheath Tensile	%	≥8.0
Pair Colors				Sheath Tensile Strength Change Rate	%	-30~+30
P1	Blue, White/Blue	After Ageing (Average)	PVC	Sheath Tensile Strength	%	≥12.5
P2	Orange, White/Orange			Sheath Tensile Strength Change Rate	%	-30~+30
P3	Green, White/Green	Cold Bend Test		No Cracking at -20° C , 8 times of the Sheath OD for 4 hours.		
P4	Brown, White/Brown	Heat Shock Test		No Cracking at 150 ° C 1 hour.		

Performance Parameters: FLUKE Permanent Link Test									
Frequency Point	Propagation Velocity	Attenuation (Max) at 20° C	TCL (Min)	EL TCL (Min)	NEXT (Min)	PS NEXT (Min)	EL FEXT (Min)	PS EL FEXT (Min)	RL (Min)
MHZ	m/s	dB	dB	dB	dB	dB	dB/100m	dB/100m	dB
4	≥0.604C	4.1	44	23	56.3	53.3	52	49	23
8	≥0.610C	5.8	41	16.9	51.8	48.8	45.9	42.9	24.5
10	≥0.612C	6.5	40	15	50.3	47.3	44	41	25
16	≥0.614C	8.2	38	10.9	47.2	44.2	39.9	36.9	25
20	≥0.615C	9.3	37	9	45.8	42.8	38	35	25
25	≥0.616C	10.4	36	7	44.3	41.3	36	33	24.3
31.25	≥0.617C	11.7	35.1	/	42.9	39.9	34.1	31.1	23.6
62.5	≥0.618C	17	32	/	38.4	35.4	28.1	25.1	21.5
100	≥0.619C	22	30	/	35.3	32.3	24	21	20.1