

Platinum Professional Level 8 Channel NVR 1U

LTN8708Q-P8




Key Features:

- H.265/H.265+/H.264/H.264 Zip+/MPEG4 video formats
- Support live view, storage, and playback of the connected camera with up to the resolution of 8 Megapixels
- Recording at up to 8MP resolution
- Up to 2 SATA interfaces connectable for recording and backup
- HDMI output at up to 4K(3840 x 2160) and VGA output at up to 1920 × 1080p resolution

Rear Panel:

- | | |
|--------------------------|--|
| 1. Power Supply | 6. VGA Interface |
| 2. Audio In | 7. USB Interface |
| 3. HDMI Interface | 8. GND |
| 4. LAN Network Interface | 9. Power Switch |
| 5. Audio Out | 10. Network Interfaces with PoE function |

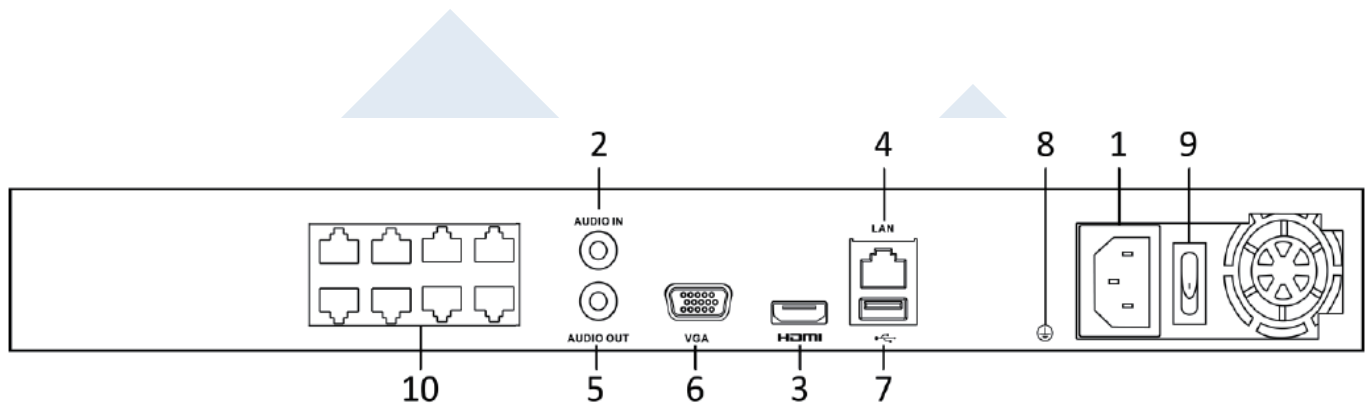

Platinum Professional Level 8 Channel NVR 1U

LTN8708Q-P8

Video/Audio Input	
IP video Input	8-ch
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)
Network	
Incoming bandwidth	80Mbps
Outgoing bandwidth	80Mbps
Video/Audio Output	
Recording resolution	8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF
HDMI output	4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
VGA output	1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
Audio output	1-ch, RCA (Linear, 1kΩ)
Decoding	
Decoding format	H.265/H.265+/H.264/H.264 Zip+/MPEG4
Recording resolution	8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous playback	8-ch
Capability	1-ch @ 8 MP / 4-ch @ 1080p
Hard Disk	
SATA	2 SATA interfaces for 2 HDDs
Capacity	Up to 6TB for each disk
External Interface	
Network Interface	1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface
Network protocols	TCP/IP, DHCP, PT CLOUD, DNS, DDNS, NTP, IP Portal, SMTP, NFS, iSCSI, UPnP™, HTTPS
USB Interface	2 × USB 2.0
PoE	
Interface	8, RJ-45 10/100 Mbps self-adaptive Ethernet interfaces
Max. Power	≤ 80W
Supported standard	IEEE 802.3 af/at
GENERAL	
Power Supply	100~240V AC
Power	≤ 180W
Consumption	≤ 15W
Working Temperature	14° F - 131° F (-10° C ~ +55° C)
Working Humidity	10% - 90%
Casing	380mm chassis
Dimensions (WxDxH)	380 × 315 × 52mm (15.0 × 12.4 × 2.0 inch)
Weight	≤ 3 kg (6.6 lb)