



**SSD OS DRIVE**

Solid state OS drive provides improved reliability and fast boot times



**DUAL GB NICs**

Dual network ports allow use of an isolated camera network for security




**HD ANALOG**

Supports up to 8MP HD analog resolution



**SENSOR I/O**

Compatible with external sensors for additional local monitoring



**MOUNTING HARDWARE**

Mounting hardware included for convenient installation



**TWO DRIVE CAPACITY**


Increased drive capacity for increased storage

## APPLIANCE SPECIFICATIONS


<b>Recording Rate</b>	100Mbps	
<b>Supported Video Input</b>	<b>HD-TVI:</b> 8MP, 5MP, 4MP, 3MP, 2MP, 1MP <b>AHD:</b> 5MP, 4MP, 2MP, 1MP <b>HD-CVI:</b> 4MP, 2MP, 1MP	
<b>Maximum Frame Rate</b>	<b>Primary Stream:</b> 8MP @ 8FPS   5MP @ 12FPS   4MP @ 15FPS   3MP @ 18FPS 2MP @ 30FPS <b>Sub-stream:</b> WD1/4CIF/CIF 30FPS	
<b>Video Outputs</b>	1 x HDMI or 1 x VGA	
<b>Digital Relay Outputs</b>	2 x Form A contacts	
<b>Alarm Sensor Inputs</b>	4 x Form A contacts	
<b>Video Signal Loss Detection</b>	Yes	
<b>Motion Detection</b>	Server Side (Adjustable Sensitivity, Custom Grid)	
<b>Native Analytics Support</b>	<b>Smart Motion Channels: 8</b> Limitations apply. <a href="#">Click here to learn more.</a>	
<b>Remote Operation</b>	Complete remote operation (Live view, Search, Setup, Updates)	
<b>Remote Software</b>	Web Client / Command Station Desktop Client / OpenEye Mobile Apps	
<b>PTZ Control</b>	Up the Coax / IP Protocol	
<b>Recording Mode</b>	Continuous / Motion / Continuous + Motion	
<b>Playback Search</b>	Multi-channel playback / Calendar / Timeline / Thumbnail / Event	
<b>Backup</b>	Cloud / Network / USB	
<b>USB Ports</b>	<b>Front:</b> 2 x USB 2.0   <b>Rear:</b> 2 x USB 2.0, 2 x USB 3.0	
<b>Digital Signature Support</b>	AVI and JPG	
<b>Operating System</b>	Linux	
<b>Storage Capacity (Size)</b>	Up to 24TB	
<b>Network</b>	Dual GbE	
<b>Power Supply</b>	292W	
<b>Power Rating</b>	<b>Input:</b> AC 100~240V, 6A-3A, 47Hz-63Hz	
<b>Max Power Consumption</b>	175W	
<b>Built-In Analog Inputs</b>	<b>8 Channel:</b> 8 BNC (1.0Vp-p,75Ω) PAL/NTSC Self-adaptive	<b>16 Channel:</b> 16 BNC (1.0Vp-p,75Ω) PAL/NTSC Self-adaptive
<b>Operating Temperature</b>	32°F ~ 104°F (0°C ~ 40°C)	
<b>Mounting Hardware</b>	Rack Mount Ears Included	
<b>Mouse</b>	Included	
<b>Country of Origin</b>	China	
<b>NDAA Compliant</b>	No	
<b>Dimensions</b>	17.25" x 13.5" x 1.75" (438 x 343 x 44.5mm)	
<b>Unit Weight</b>	20lbs	
<b>Certification</b>	UL	
<b>SSD OS Drive</b>	Standard	

## DIMENSIONS

### OE-MAX08

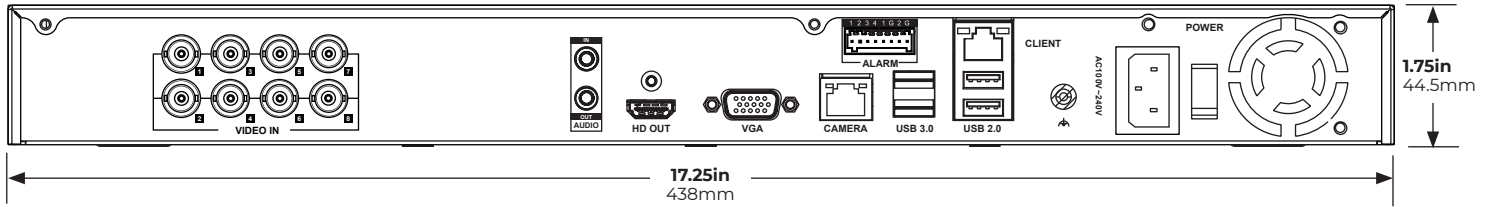

### OE-MAX16

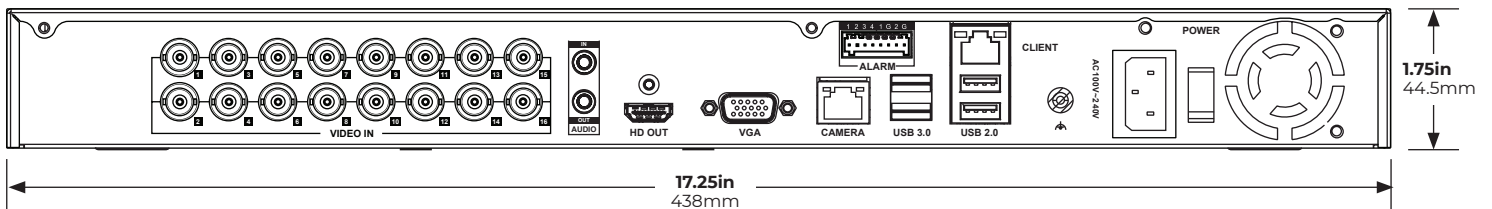

## MODELS

**OE-MAX08xx**  
8 channel recorder

**OE-MAX16xx**  
16 channel recorder

**xx** = TB storage configuration