

Entrance Station: select up to 5



TL-2000
Audio Telephone Entrance Station

- Stainless steel panel
- Weather and vandal resistant
- Flush mount (back box included)

→ p. 103

Accessories




SBX-TL2000
Surface Mount Box for TL-2000
→ p. 103



Door Strike
2A, 12V DC or 1A, 24V DC
(N/A from Aiphone)




PS-1225UL
12V DC Power Supply
→ p. 111

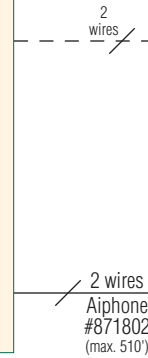

System Features

- Uses phone line to call tenants
- Up to 5 TL-2000 entrance stations per phone line
- Up to 2,000 primary telephone numbers and 2,000 secondary numbers can be used
- Door release
- Program up to 2,000 unique access codes
- RS-232 connection for programming (USB-to-serial cable included)
- PC software included to program and update device on or off site via modem or direct connection

Wiring

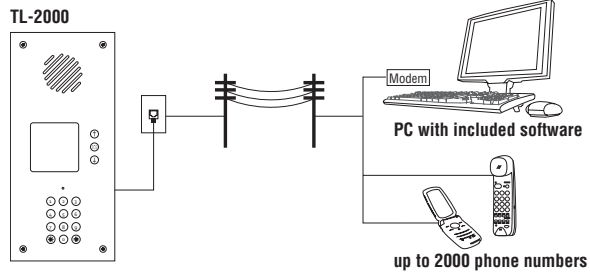

Specifications

- Power Source** 12V DC – use PS-1225UL
- Communication** Standard analog DTMF “Touch Tone” / cell phone
- Door Release** 2 Form C dry contacts, 12V DC, 2A 24V DC, 1A
- Connectors** Operator analog line or PABX extension
- Material** Stainless steel
- Temp. Rating** 5°~ 140°F (-15°~60°C)
- Programming** PC running Windows® XP, Windows Vista®, Windows® 7, Windows® 8, or Windows® 10
- Access Code** Max. 2,000 codes with 3–8 digits per code
- Wire Type** Standard category phone wire

Dimensions

	INCHES			MILLIMETERS		
	Height	Width	Depth	Height	Width	Depth
TL-2000	13-3/8"	6-1/8"	*	340	155	*

*Aiphone recommends a 2-1/2" minimum back box depth for all flush mount stations.