

RADION TriTech

www.boschsecurity.com



BOSCH

Invented for life



- ▶ 11 m x 11 m (35 ft x 35 ft) coverage
- ▶ Pet Immunity up to 45 kg (100 lb)
- ▶ Includes battery life extension feature
- ▶ Draft and Insect immune
- ▶ Supervised for low-battery, cover-tamper, and removal from mounting surface tamper conditions.

RADION wireless from Bosch provides the range, scalability and exceptional battery life required to ensure reliable performance and superior quality. Advanced diagnostics and multiple device enrollment options make installation and maintenance simple and cost effective. With a complete line of peripherals, RADION provides the flexibility for virtually any application requirement.

System overview

RADION TriTech uses artificial intelligence to detect motion and provide immunity to false alarms caused by pets or animals. An integral RF transmitter reports low battery and tamper status, and sends a supervisory signal to the control panel.

Functions

Signal Processing

RADION TriTech motion detector with Pet Immunity uses both passive infrared and microwave Doppler radar technologies to provide outstanding catch performance and false alarm immunity. Alarm signals must trigger both technologies and meet the signal processing algorithm's strict requirements to generate an alarm.

PIR Signal Processing

Motion Analyzer II uses multiple thresholds and timing windows to analyze timing, amplitude, duration, and polarity of signals to make an alarm decision. The detectors tolerate extreme levels of heat and light from heaters and air conditioners, hot and cold drafts, sunlight, lightning, and moving headlights. There are three sensitivity settings.

Microwave signal processing

Adaptive processing adjusts to background disturbances. This helps to reduce false alarms while maintaining catch performance

Test Features

Externally visible, tri-color alarm LED indicates each technology independently.

Pet Immunity

The detector is able to distinguish between signals caused by humans and signals caused by pets such as a dog up to 45 kg (100 lb) or two dogs at 27 kg (60 lb) or up to ten cats. This provides immunity to false alarms while maintaining proper catch performance of human targets.

Draft and Insect Immunity

The sealed optical chamber provides immunity to drafts and insects.

Temperature Compensation

The sensor adjusts its sensitivity to maintain consistent catch performance at critical temperatures.

Battery Life Extension feature (PIR and TriTech)

In the normal operating mode, an alarm can be transmitted only after three (3) minutes have passed since the previous alarm restoral. This 3 minute lockout time reduces unnecessary RF transmissions in high traffic areas, thereby extending battery life.

Certifications and approvals

Region	Certificate
US	UL 639 – Intrusion Detection Systems FCC Part 15
Europe	EN50131-1

Region	Certification
Europe	CE 2004/108EC EMC Directive (EMC), 2006/95/EC Low-Voltage Directive (LVD), 1999/5/EC Radio equipment and Telecommunications Terminal Equip- ment (R&TTE), 2011/65/EU Restriction of the use of certain hazardous substan- ces in electrical and electronic equip- ment
	EN50131 EN-ST-000163 RADION TriTech/ RFDL-11
USA	UL 20121217-BP1448
	FCC Part 15 Security/Remote Control Trans- mitter 10.525.0 MHZ [10.525.0 MHZ]
	FCC Part 15 Security/Remote Control Trans- mitter 433.42 MHZ [433.42 MHZ]
Canada	IC 1249A-RWSDFT

Installation/configuration notes


Mounting Considerations

Mounting height for the detector is between 2 m (6.5 ft) and 2.4 m (8.0 ft). When installing the detector, keep in mind that the plastics are specifically designed to allow wall tamper protection in a corner mount installation. Additional considerations include:


- Temporarily mount the detector using double-sided tape, and test it for both detector coverage and RF range from the desired location before mounting it permanently.
- Mount the detector where an intruder will most likely cross through the coverage pattern.
- Do not mount in areas with large metallic surfaces such as heating ducts or electrical wiring which may inhibit the sensor's RF signals from reaching the control panel receiver.
- Do not mount the detector outdoors or where direct sunlight can reach it.

- In pet immune applications, do not mount where pets can climb because the upper areas are not immune to pets.

Coverage

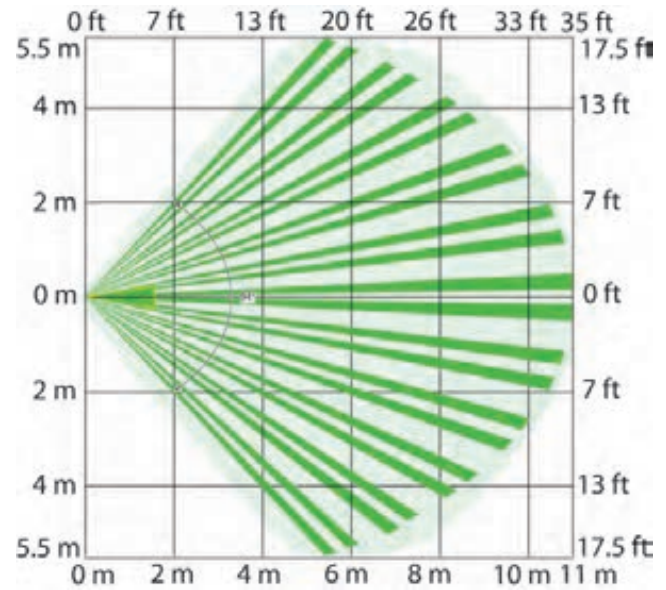

Top View Broad 11 m x 11 m (35 ft x 35 ft)

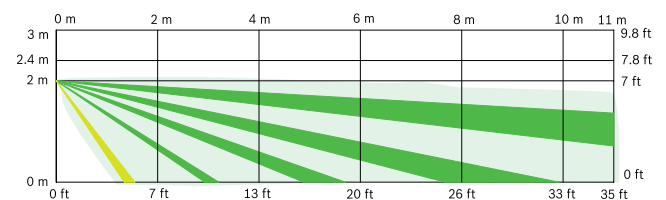

Side view Broad 11 m x 11 m (35 ft x 35 ft)

Parts included

Quantity	Component
1	Detector
4	Lithium battery (AA)
1	Hardware pack
1	Installation guide

Technical specifications

Properties

Dimensions:	138 mm x 72 mm x 64 mm (5.5 in x 2.8 in x 2.5 in)
Internal Coverage Pointability:	Vertical: -4° to -10°
Alarm Indicator	<ul style="list-style-type: none"> • Blue LED for TriTech alarms • Green LED for microwave detection • Red LED for PIR detection
Sensitivity Selection:	Field selectable for standard or intermediate sensitivity.

Power

Power/Voltage:	Four AA Alkaline batteries, 1.5 VDC (1.5 VDC x 4 batteries = 6 VDC total)
Battery life:	Up to 5 years

Environmental Considerations

Temperature:	Functional range: -10°C to +49° (+14°F to +120°F) UL only: 0°C to +49°C (+32°F to +120°F) EN 50130-5 Class II only: -10°C to 40°C (+14°F to +104°F)
Environment	Complies with EN50130-5 Class II
Relative Humidity:	Up to 93% non-condensing
Cover and Wall Tamper Switch:	Transmits a tamper switch signal when the unit is removed from its base, or the mounting surface.
Frequency:	433.42 MHz
Use:	Intended for indoor use.

Compatibility

Receivers:	B810 wireless receiver (compatible with RFDL-11-A only) RFRC-OPT wireless receiver (compatible with RFDL-11 only) RFRC-OPT-CHI wireless receiver (compatible with RFDL-11-CHI only)
------------	---

Ordering information**RFDL-11-A (433.42 MHz)**

For use in North and South America
Order number **RFDL-11-A**

RFDL-11 (433.42 MHz)

For use in Europe, Africa, and Australia.
Order number **RFDL-11**

RFDL-11-CHI (433.42 MHz)

For use in China only.
Order number **RFDL-11-CHI**

Accessories**B328 Gimbal-mount Bracket**

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.
Order number **B328**

B338 Universal Ceiling-mount Bracket

Swiveling plastic mount for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.
Order number **B338**

B335-3 Swiveling low-profile mount

Swiveling, low-profile, plastic mount for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°. Available in triple packs.
Order number **B335-3**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com