

## SERIES M9900 - EXIT DEVICE

### RIM MOUNT




MARKS #	FUNCTION
M9900	Rim Panic
M9900F	Fire Rated Rim Panic
M9900 - 48	Rim Panic - 48"
M9900F - 48	Fire Rated Rim Panic - 48"

OPTIONS	
M9900	33" LENGTH FOR 36" DOOR
M9900 - 48"	42" LENGTH FOR 48" DOOR

SPECIFICATIONS
<ul style="list-style-type: none"> <li>• Doors: 1-3/4" thick standard.</li> <li>• End cover: Flush mounted beveled "Panic Protector" design.</li> <li>• Strike: Roller strike.</li> <li>• Rail Assembly: Extruded Aluminum, 32D finish.</li> <li>• Dead latch Bolt: Stainless Steel 3/4" throw.</li> <li>• Dead latch Bolt: Stainless Steel 5/8".</li> <li>• Dogging feature: Allen Key (M9900)</li> <li>• UL listed: For "Panic Hardware" and Fire Rated Model 3 hour fire doors up to 38" x 86".</li> <li>• ANSI: ANSI 156.3 (2001), requirements for Grade 1.</li> <li>• 3 Hour Fire Rating</li> <li>• Finish: 32D</li> </ul>

<ul style="list-style-type: none"> <li>• EXTRUSION HEAVY GAGE, 32D FINISH</li> <li>• PANIC PROTECTOR™ END CAP</li> <li>• LIFETIME MECHANICAL WARRANTY</li> <li>• EASY INSTALLATION, ECONOMICAL</li> </ul>
---

## SERIES M9900 VR - EXIT DEVICE

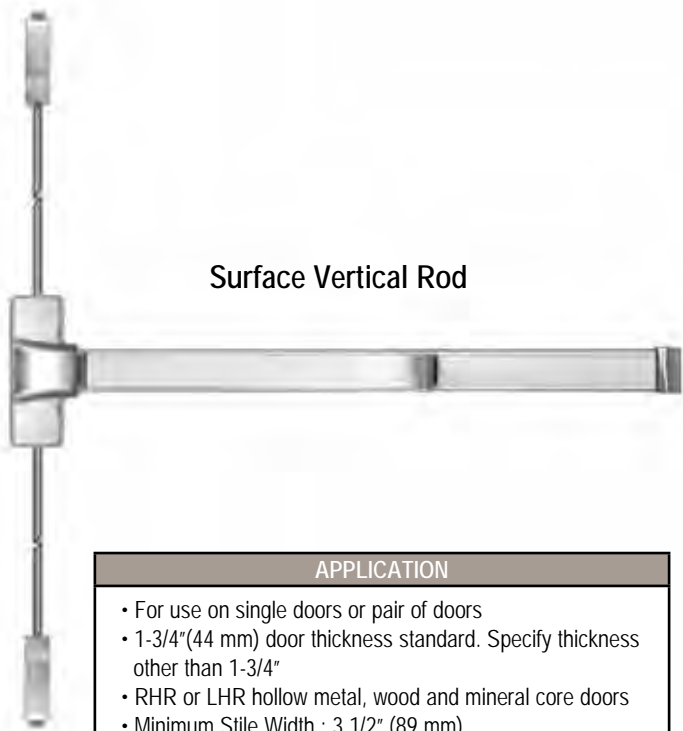

Surface Vertical Rod

APPLICATION
<ul style="list-style-type: none"> <li>• For use on single doors or pair of doors</li> <li>• 1-3/4"(44 mm) door thickness standard. Specify thickness other than 1-3/4"</li> <li>• RHR or LHR hollow metal, wood and mineral core doors</li> <li>• Minimum Stile Width : 3 1/2" (89 mm)</li> </ul>

<b>32D FINISH</b>
-------------------

MARKS #	FUNCTION
M9900 VR	Rim Panic Vertical Rod
M9900F VR	Fire Rated Rim Panic Vertical Rod
M9900 - 48 VR	Rim Panic Vertical Rod - 48"
M9900F - 48 VR	Fire Rated Rim Panic Vertical Rod - 48"

SPECIFICATIONS
<p>Device Head Cover: Zinc alloy or stainless steel                      Chassis: Steel, plated                      Mechanism Housing: Extruded aluminum                      Push Bar Base: Extruded aluminum                      Touch Plate: Stainless steel                      End Cap: Stainless steel                      Top Latch: Stainless steel 37/64" (14.8mm)                      Top Strike: Included                      Bottom Latch: Stainless steel 37/64" (14.8mm)                      Bottom Strike: Included                      Latch Case Covers: Steel, stainless steel or brass                      Vertical Rods: Aluminum tube                      Hand: Non-handed                      Mounting: Machine screws standard. Sex bolts optional. Order "SNB" for wood or unreinforced metal doors                      Dogging: Allen-type key furnished                      Finish: 32D                      Outside Trim: Order separately                      Standard height: For 7'0" doors                      UL Listed: ANSI/BHMA Grade1 Panic Exit Hardware, 3-Hour Fire Rating</p>