

4K Penta-brid HDCVI DVR

16-Channel 1.5U Digital Video Recorder



System Overview

The X74A Series HDCVI DVR offers 4K recording on each HDCVI channel and a host of advanced features and functions. The X74A takes advantage of HDCVI technology for easy integration into existing video surveillance systems while leveraging existing networks, cabling, and cameras. Penta-brid access technology seamlessly records video from HDCVI, AHD, TVI, CVBS, and IP sources simultaneously on each channel.

The X74A utilizes the Smart H.265+ Codec to significantly improve encoding efficiency and to reduce bandwidth and storage costs. In addition to the advanced codec, the X74A series supports smart search and Point of Sale (PoS) integration. This recorder is the ideal solution for actively monitoring and recording video feeds in a wide range of applications including public venues, retail stores, transportation hubs and access ways, personal property and homes, and educational institutions.

Functions


Smart H.265+

Smart H.265+ is the optimized implementation of the H.265 codec that uses a scene-adaptive encoding strategy, dynamic GOP, dynamic ROI, flexible multi-frame reference structure and intelligent noise reduction to deliver high-quality video without straining the network. Smart H.265+ technology reduces bit rate and storage requirements by up to 90% when compared to the H.264 video compression standard.

4K Resolution

The HDCVI DVR records 4K resolution on each HDCVI and IP channel. 4K is a revolutionary breakthrough in image processing technology. 4K delivers four times the resolution of standard HDTV 1080p cameras and offers superior picture quality and image details. 4K resolution improves the clarity of a magnified scene to view or record crisp forensic video from large areas.

- 4K at 7 fps Recording Resolution on All HDCVI Channels
- Dual-stream Video Recording
- Smart H.265+ and Smart H.264+ Dual Codec
- Auto-detection of HD Analog Video Inputs
- 16 + 16 IP Camera Channels, each channel up to 12 MP
- Maximum 128 Mbps Incoming Bandwidth
- Intelligent Video System with Face Detection
- Advanced Voice Compression Codec G.711 and PCM
- Spot Output
- Five-year Warranty*

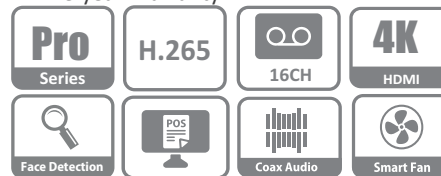

Coaxial Audio

The HDCVI DVR accepts and records audio signals from HDCVI cameras with a built-in microphone via the Video IN BNC connection, reducing the number of connections and easing installation. The HDCVI DVR offers volume control for live audio directly from the on-screen menu.

HDCVI/AHD/TVI/CVBS Auto-detect

The HDCVI DVR automatically recognizes the incoming signals of each attached camera without any setup, making installation easy and operation convenient.

Spot Output

The HDCVI DVR provides a spot output channel for a secondary monitor. This monitor allows the operator to view one monitor that is assigned to selected cameras or video inputs from high-security areas.

Point of Sale (POS)

Ideal for grocery and retail stores, the optional POS solution allows the HDCVI DVR to receive a POS transaction via corresponding video. This feature allows merchants to analyze specific transactions via the Fuzzy Search Algorithm.

Smart Fan Design

The HDCVI DVR automatically turns on or turns off the fan according to the CPU temperature. This function reduces fan noise and helps to conserve electricity.

Intelligent Video System (IVS)

IVS is a built-in video analytic algorithm that delivers standard intelligent functions to monitor a scene for Tripwire violations, intrusion detection, and abandoned or missing objects. IVS quickly and accurately responds to monitoring events in a specific area.

Face Detection

This technology identifies human faces in digital images and then searches a database to identify the individual in the image.

Smart Search

Smart Search allows an operator to specify a region in the playback video to search for a motion detection event, saving time and manpower.

Technical Specification

System

Main Processor	Embedded Processor
Operating System	Embedded LINUX

Interface

Analog Camera Input	16 Channels, BNC
HDCVI	8 MP, 6 MP, 5 MP, 4 MP, 1080p, 720p
AHD	5 MP, 4 MP, 3 MP, 1080p, 720p
TVI	5 MP, 4 MP, 3 MP, 1080p, 720p
CVBS	NTSC

IP Camera Input	16+16 Channels, each channel up to 12 MP (The recording rate is dependent on the maximum resolution and frame rate of the connected IP camera.)
-----------------	--

Audio	Input	<ul style="list-style-type: none"> Four (4) Channels, BNC Accepts audio signal via Video IN BNC connection if HDCVI camera has a built-in microphone
	Output	One (1) Channel, BNC

Two-way Talk	Input: One (1) Microphone, BNC Output: One (1) Channel, BNC
--------------	--

Recording

Compression	Smart H.265+, H.265, Smart H.264+, H.264
-------------	--

Recording Resolution	8 MP, 6 MP, 5 MP, 4 MP, 3 MP, 4 M-N (1280 x 1440), 1080p, 720p, 960H, D1, CIF
----------------------	---

Record Rate	Main Stream	<ul style="list-style-type: none"> 8 MP at 7 fps; 6 MP at 10 fps, 5 MP at 12 fps, 4 MP or 3 MP at 15 fps; 4 M-N, 1080p, 720p, 960H, D1, CIF or QCIF at 30 fps
	Sub Stream	<ul style="list-style-type: none"> 960H at 15 fps; D1 or CIF at 30 fps

Maximum Incoming Bandwidth	128 Mbps
----------------------------	----------

Bit Rate	32 Kbps to 6144 Kbps per Channel
----------	----------------------------------

Record Mode	Manual, Schedule (Regular, Continuous), MD (Video Detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
-------------	--

Record Interval	1 to 60 minutes (default: 60 minutes), Pre-record: 1 to 30 s, Post-record: 10 to 300 s
-----------------	--

Audio Compression	G.711A, G.711U, PCM
-------------------	---------------------

Audio Sample Rate	8 KHz, 16 bits per Channel
-------------------	----------------------------

Audio Bit Rate	64 Kbps per Channel
----------------	---------------------

Display

Interface	Two (2) HDMI (3840 x 2160) One (1) VGA (1920 x 1080) One (1) TV (BNC)
-----------	---

Spot Output	HDMI 2
-------------	--------

Native Output Resolution	HDMI 1	3840 x 2160, 2560 x 1440, 1920 x 1080, 1280 x 1024, 1280 x 720
	HDMI 2 / VGA	1920 x 1080, 1280 x 1024, 1280 x 720

Maximum Decoding	Eight (8) Channels of 4K at 7 fps Eight (8) Channels of 6 MP at 10 fps Eight (8) Channels of 5 MP at 12 fps 16 Channels of 4 MP or 3 MP at 7 fps 16 Channels of 4 M-N or 1080p at 15 fps 16 Channels of 720p or 960H at 30 fps
------------------	---

Multi-screen Display	IP extension mode disabled: 1/4/8/9/16 IP extension mode enabled: 1/4/8/9/16/25/36
----------------------	---

On-screen Display	Camera Title, Time, Video Loss, Camera Lock, Motion Detection, Recording
-------------------	--

Fisheye Dewarping	Dewarping modes available via Web Interface or SmartPSS
-------------------	---

Network

Interface	One (1) RJ-45 (1000 Mbps) Port
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search (Supports Dahua IP cameras, DVRs, NVS)
Maximum User Access	128 Users
Mobile Operating System	IOS, Android
Interoperability	ONVIF 16.12, CGI Conformant

Video Detection and Alarm

Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 x 18), Video Loss, Tampering and Diagnosis
Alarm Input	16 Channels
Relay Output	Six (6) Channels

Playback and Backup

Playback	1/4/9/16
Search Mode	Time/Date, Alarm, MD and Exact Search (accurate to 1 second)
Playback Function	Play, Pause, Stop, Rewind, Fast Play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, and Digital Zoom
Backup Mode	USB Device/Network

Storage

Internal HDD	Four (4) SATA Ports, up to 10 TB capacity for each disk
eSATA	One (1) Port

Auxiliary Interface

USB	One (1) USB 2.0 Port and Two (2) USB 3.0 Ports
RS232	One (1) Port for PC Communication and Keyboard
RS485	One (1) Port for PTZ Control
RS422	One (1) Port for PTZ Control

Electrical

Power Supply	100 VAC to 240 VAC, 50/60 Hz
Power Consumption	< 35 W, without HDD

Construction

Dimensions	1.5U, 440.0 mm x 417.0 mm x 76.0 mm (17.32 in. x 16.42 in. x 2.99 in.)
Net Weight	4.80 kg (10.58 lb), without HDD
Gross Weight	7.40 kg (16.31 lb)
Installation	Desktop or Rack-mount

Environmental

Operating Conditions	-10° C to +55° C (+14° F to +131° F), 10% to 90% RH
Storage Conditions	-20° C to +70° C (-4° F to +158° F), 0% to 90% RH

Third-party Support

Third-party Support	Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and others
---------------------	---

Certifications

Safety	UL 60950-1 EN 60950-1 IEC 60950-1
Electromagnetic Compatibility (EMC)	FCC Part 15 Subpart B EN 61000-3-2 EN 61000-3-3 EN 55032 EN 50130 EN 55024

Intelligence


The IVS features are operational only when the additional IP channel feature is not active. The HDCVI DVR supports IVS or the additional IP channel inputs, both features cannot be in use simultaneously. The HDCVI DVR performs IVS capabilities on analog channels only. IVS processing for an IP camera connected to channels 1 through 16 occurs on the camera and not on the HDCVI DVR. IVS triggers an alarm and takes a defined action for the following events:

Premium Features	
Tripwire	A target crosses a user-defined line. Available on 16 analog channels.
Intrusion	A target enters or exits a defined perimeter. Available on 16 analog channels.
Abandoned/Missing Object	A target leaves an object in designated area, or a target removes an object from the same designated area. Available on analog channels 1, 2, 3, and 4.
Advanced Features (available only when Premium IVS features not in use)	
Facial Detection	Detects and captures a snapshot of human face in a defined area within a scene. Available on the first analog channel.

Ordering Information

Type	Part Number	Description
16-Channel HDCVI DVR	X74A3L2	16-Channel Penta-brid 4K 1.5U Digital Video Recorder, 2 TB
	X74A3L4	16-Channel Penta-brid 4K 1.5U Digital Video Recorder, 4 TB
	X74A3L6	16-Channel Penta-brid 4K 1.5U Digital Video Recorder, 6 TB
	X74A3L8	16-Channel Penta-brid 4K 1.5U Digital Video Recorder, 8 TB
	X74A3L12	16-Channel Penta-brid 4K 1.5U Digital Video Recorder, 12 TB
	X74A3L16	16-Channel Penta-brid 4K 1.5U Digital Video Recorder, 16 TB

Rear Panel

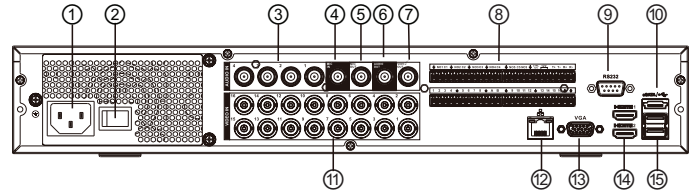

1	VAC Power Input	9	RS232 Port
2	On/Off Switch	10	eSATA Port
3	Audio Input x4, BNC	11	Video Input, x16 BNC
4	Microphone Input, BNC	12	Network Port (1000 Mbps), RJ-45
5	Microphone Output, BNC	13	VGA Output
6	Audio Output, BNC	14	HDMI 1 and HDMI 2 Output
7	Video Out (TV), BNC	15	USB 3.0 Ports x 2
8	Alarm I/O Ports RS485 Input RS422 Input		

Dimensions

